

Keysight Technologies

N9912A FieldFox RF Handheld Analyzer

4/6 GHz

Technical Overview



Carry Precision with You

Every piece of gear in your kit had to prove its worth. Measuring up and earning a spot in your field kit is the driving idea behind Keysight's FieldFox RF analyzer. It is equipped to handle routine maintenance, in-depth troubleshooting and anything in between.

Starting with adaptability: every operating mode is flexible enough to meet the needs of novices and experts alike. To accelerate your work, each mode has a task-driven interface that saves time in the field. Best of all, FieldFox is designed to withstand your toughest working conditions.

Add FieldFox to your kit and carry precision with you.



World’s Most Integrated Handheld RF Analyzer

Key measurements

- Cable and antenna test, distance-to-fault, return loss, cable loss
- Vector network analysis with Smith chart display and time domain
- Spectrum analyzer, channel scanner, CHP, ACPR, OBW
- Interference analyzer, spectrogram, waterfall, record and playback
- Independent source, CW and tracking
- Vector voltmeter
- Power measurements using USB power sensor, built-in power meter and pulse measurements

Key differentiators

- Immediate measurements with **CalReady**, 50 percent faster than traditional handheld instruments
- Integrated **QuickCal** calibrates for simple field measurements- no calibration kit required
- Superior dynamic range (96 dB) and sensitivity (-148 dBm) in the spectrum analysis mode

Frequency specifications



	Frequency Range
Cable and antenna analyzer	2 MHz to 4/6 GHz
Vector network analyzer	
Spectrum analyzer	100 kHz* to 4/6 GHz
Signal source	2 MHz to 4/6 GHz

*Useable to 5 kHz

Pick up FieldFox for its ergonomics



...and depend on its durability and convenience

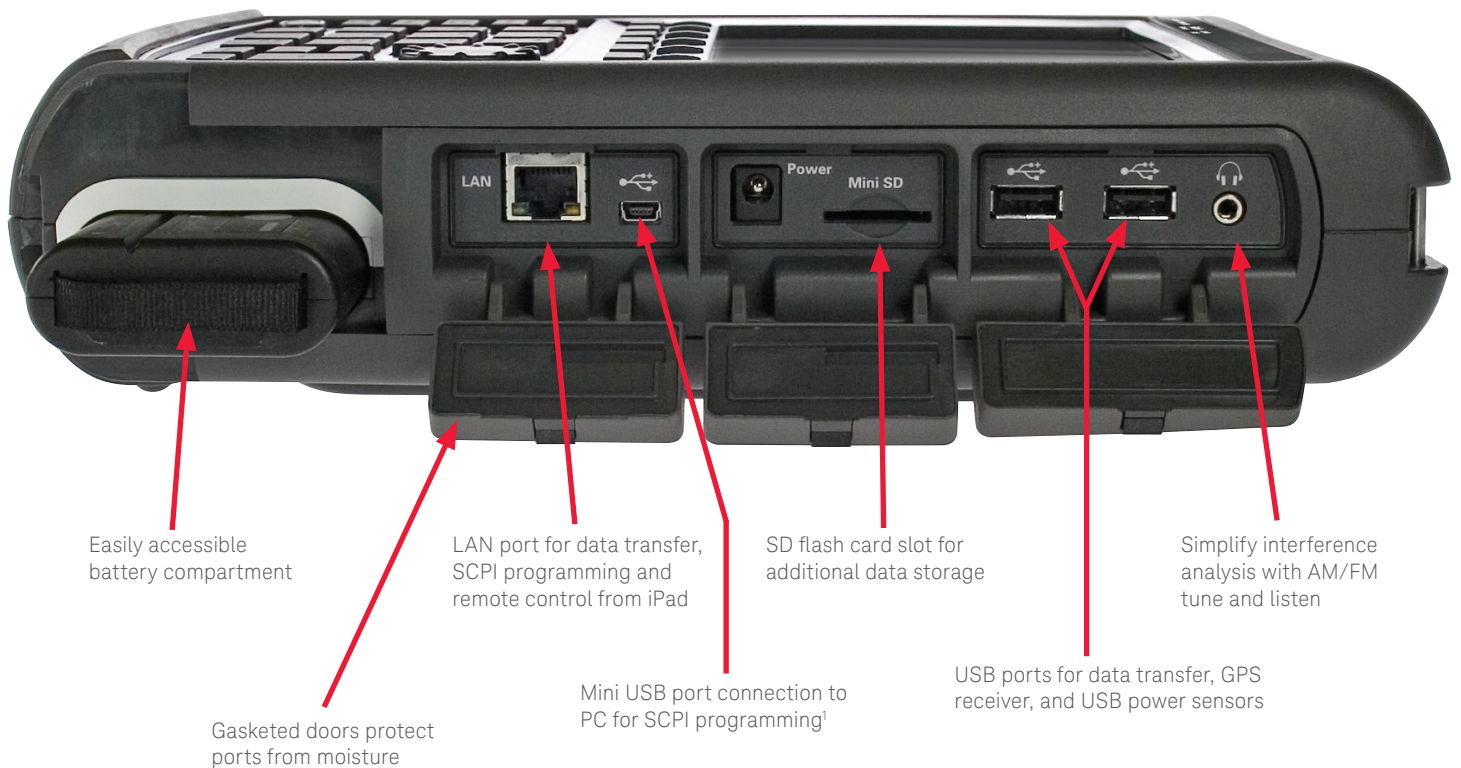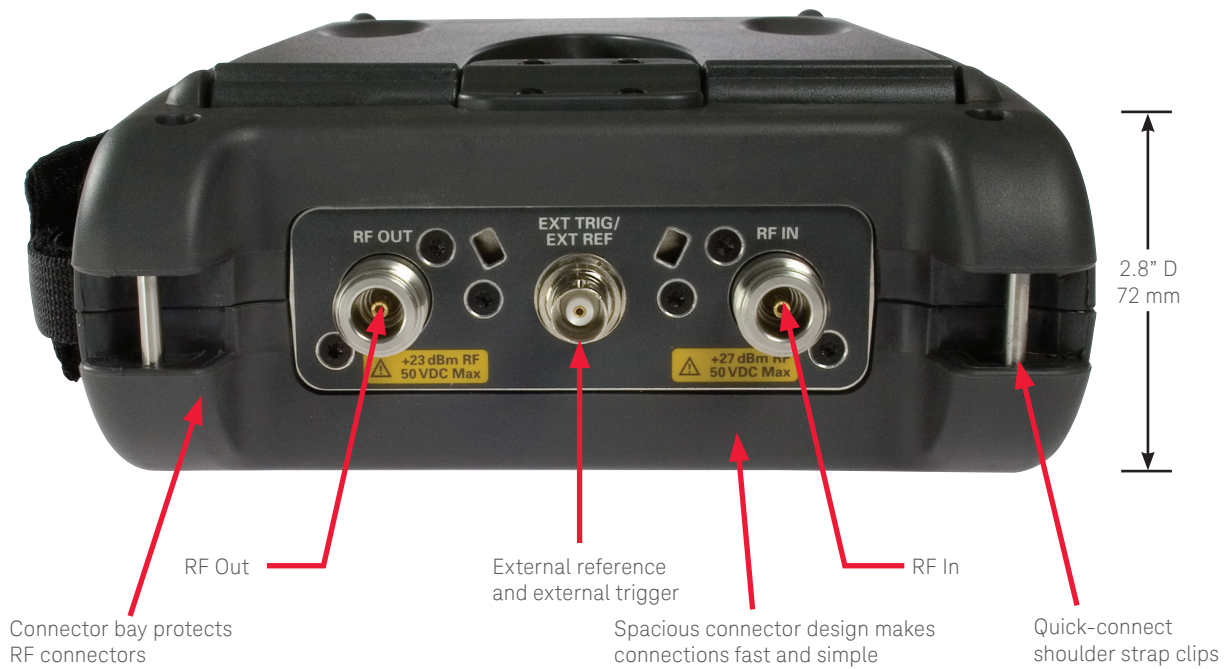

1. SCPI over USB is only available for N9912A with serial number prefix starting with MY5607/SG5607/US5607 and N9912A upgraded with Option N9910HU-500.

Utilize the World's Most Integrated Handheld RF Analyzer

Cable and antenna analyzer

Fifty to sixty percent of cell site problems are caused by faulty cables, connectors, and antennas. Degraded feed lines cause poor coverage, unnecessary handovers, paging failures and access failures on uplink. To avoid service quality problems, it is critical to keep cell sites' cable and antenna systems in good condition.

Use FieldFox to make return loss, VSWR, insertion loss/transmission, one-port cable loss, and distance-to-fault (DTF) measurements. You can test antennas, cables, filters, and amplifiers with a single instrument.

Return loss and DTF measurements

FieldFox can make both return loss and distance-to-fault measurements at the same time. This helps you correlate overall system degradation with specific faults in the cable and antenna system.

The built-in cable editor allows you to edit existing cable types on-site, and save them as new cable types with user defined names.

CalReady-calibrated at power on and ready to go

Each instrument is CalReady at the RF Out port, immediately following power-on or preset. This means it's already calibrated and ready to make measurements such as one-port cable loss, VSWR, return loss, and DTF measurements at the test port.


Hassle-free calibration in the field with QuickCal

FieldFox comes with a built-in calibration capability that allows you to calibrate the network analyzer without carrying a cal kit into the field. With any other test instrument, when you add additional devices to the test port, such as jumper cables or adapters, you need to recalibrate using a cal kit.


FieldFox's QuickCal supports measurements such as insertion loss/gain, 1-port cable loss, return loss, and DTF.

Broadband calibration


FieldFox allows you to make broadband calibrations, which means the instrument is calibrated over the maximum frequency span. After a broadband calibration, you can change the frequency range or number of points without recalibrating the instrument.

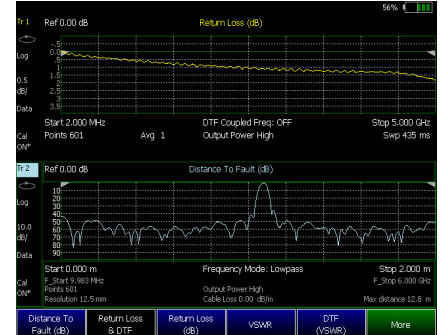

View and control the RL and DTF displays independently

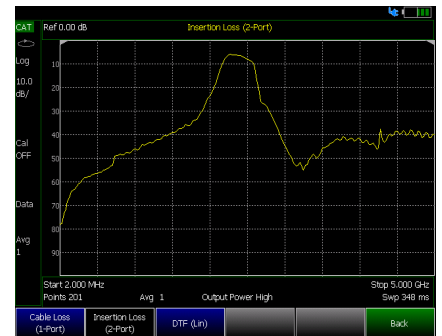

Insertion loss display

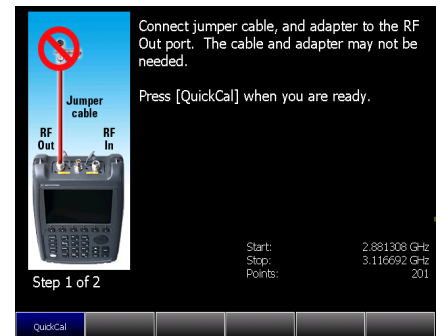

Use FieldFox's QuickCal capability and perform calibrations without carrying a cal kit

Utilize the World's Most Integrated Handheld RF Analyzer (continued)

Spectrum analyzer

Interference is a major source of cell site problems. Interference can be internal or external, uplink or downlink, and has a direct impact on the quality of service (QoS) of a communication network. FieldFox's interference analyzer is designed to identify interference signals quickly. Spectrogram and waterfall display detect intermittent signals or monitor signals of interest for longer periods of time. Signal traces can be recorded into internal memory or external flash memory devices and play back the saved traces for offline processing

FieldFox has an optional built-in spectrum analyzer that covers frequency ranges from 5 kHz to 4/6 GHz. It provides a fast spectrum scan to detect interference and RF burst capture to measure intermittent signals. It displays four traces at the same time, and you can choose different detector modes.

Field strength measurements

Field strength characterization is a common test performed by operators in the field. To make accurate measurements, the gain and loss of the antenna and cables need to be accounted for. With FieldFox, antenna factors and cable loss data can be loaded using either the front panel or the Data Link software.

Independent signal source


FieldFox has a built-in independent signal source, with a frequency range of up to 4/6 GHz. The signal source can be tuned to any frequency, independent of the spectrum analyzer frequency. You can use the signal source to create a test signal to measure coverage, antenna isolation, antenna direction alignment, and shielding effectiveness, frequency-offset devices and long cable loss measurement.

Interference analyzer


Interference can be internal or external, uplink or downlink, and has a direct impact on the quality of service (QoS) of a communication network. FieldFox's interference analyzer is designed to identify interference signals quickly. Spectrogram and waterfall display detect intermittent signals or monitor signals of interest for longer periods of time. Signal traces can be recorded into internal memory or external flash memory devices and play back the saved traces for offline processing

Channel scanner


Channel scanner allows users to make multiple channel power measurements simultaneously. It is used to verify wireless network coverage, path loss and potential interference issues. It also can be used to measure primary carriers and their intermodulated products. Each instrument state can be a custom set of frequencies with each frequency having unique integrating bandwidth. Users can record and playback the data with data logging. Using time interval logging along with geo tagging, files can be exported to Google Earth for network coverage analysis.

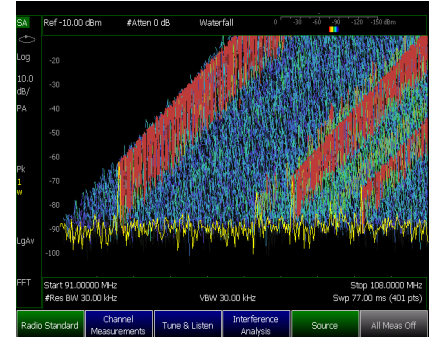

RF spectrum monitoring aided by spectrogram recording

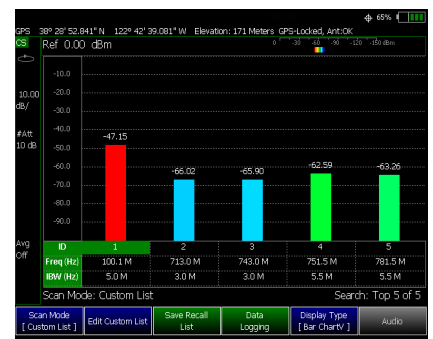

Scan up to 20 channel simultaneously with channel scanner option

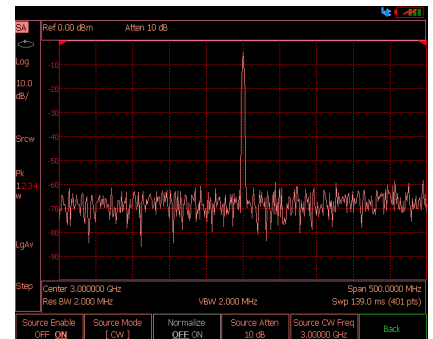

Independent CW signal source, coupled, viewed in "Night Vision" display mode

Utilize the World's Most Integrated Handheld RF Analyzer (continued)

Network analysis

FieldFox RF analyzer can be configured with VNA transmission/reflection (T/R) capability for S11 and S21 measurements.

S11, S11 phase, Smith chart and polar display are available with Option 303 (network analysis capability). To obtain S21 or insertion loss/gain, users need to order Option 110 (transmission measurement), in addition to Option 303.

For in-fixture measurements, use FieldFox's port extension or electrical delay capability to easily extend the reference plane to the device interface to provide accurate measurements. You can use the electrical delay capability to measure deviation from linear phase by removing the linear portion of the phase delay.

Transmission measurement

FieldFox provides a 2-port transmission measurement that measures insertion loss, amplifier gain, filter passband, and loss. It also makes a S21 scalar measurement if Option 303 is enabled.

Network analyzer time domain


With the time domain Option, FieldFox computes the inverse Fourier transform of the frequency-domain data to display reflection or transmission coefficients versus time. Time domain gating can be used to remove unwanted responses such as connector mismatch or cable discontinuities, and the results can be displayed in either time or frequency domain.

FieldFox's time domain function supports both low pass mode and band pass mode, enabling users to measure both broadband and frequency-selective devices


Vector voltmeter

Using FieldFox's vector voltmeter (VVM), you can measure the phase shift and electrical length of a device. By utilizing the "Zero" function, the phase and electrical length of one device can be measured relative to a "golden device". View results on the large display which can be seen as far as ten feet away.


FieldFox offers all the key functionalities of the HP 8508A, in a handheld form factor, and without the need for the source, bridge and accessories required with the 8508A.

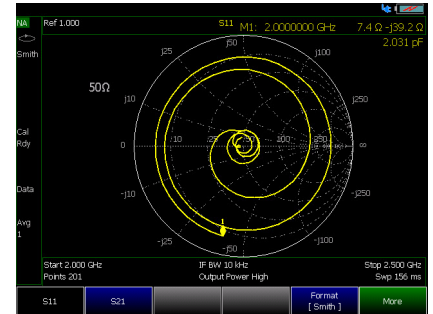

Device input impedance displayed on a Smith chart

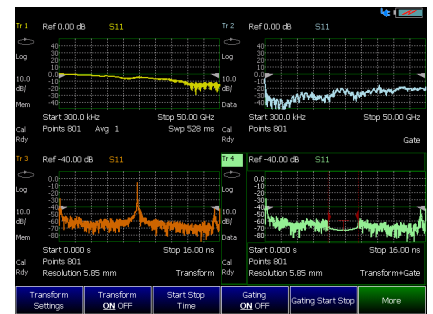

Use time domain gating to remove unwanted responses. Before gating: Traces 1 and 3, After gating: Traces 2 and 4.

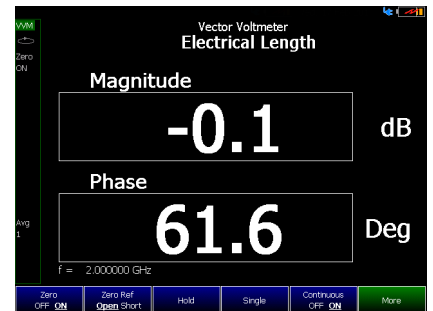

Simplify cable trimming with the vector voltmeter capability

Utilize the World's Most Integrated Handheld RF Analyzer (continued)

USB power measurements

FieldFox RF can connect with the Keysight USB power sensors to make RF power measurements. Using USB peak power sensors, users can measure both the average and the peak power of a modulated signal.

USB power measurements versus frequency

In addition to power measurements at a single CW frequency, you can measure power versus frequency - a swept measurement. FieldFox's source frequency can be set equal to the sensor/receiver frequency, or with an offset. The frequency of both the source and receiver are swept, and the two track each other. The offset frequency can be negative, zero, or positive.


This capability is useful for characterization of the scalar transmission response of devices such as mixers and converters. The FieldFox source stimulates the DUT and the power sensor is used as the measurement receiver.

Pulse measurements

FieldFox's pulse measurement option allows you to efficiently characterize pulsed RF signals such as those used in radar and electronic warfare systems, leveraging the Keysight USB peak power sensors. Measurements include peak power, peak to average ratio, and pulse profile parameters such as rise time, fall time and pulse repetition frequency.



Simplify power measurements with USB power sensors

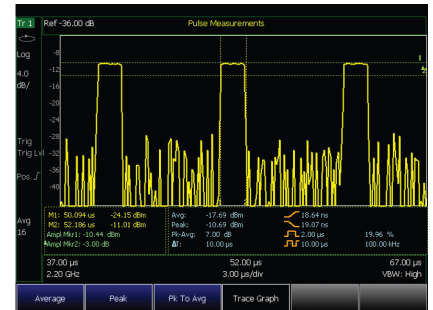

Use FieldFox to characterize pulses

Utilize the World's Most Integrated Handheld RF Analyzer (continued)

Remote control capability with iPad and iPhone

Engineers and technicians can now remotely monitor and control their FieldFox using their iOS device such as an iPhone, iPad, or iPod Touch. FieldFox's Remote Viewer iOS app emulates the front panel of the unit, letting you simply press any FieldFox key right from your iOS device. The app also allows you to instantly access technical documents such as data sheets.

FieldFox's Data Link software makes report generation and documentation easier

FieldFox's complimentary Data Link software provides data transfer, data definition and report generation. You can add markers and limit lines to traces, and you can load cable files and antenna factors using Data Link.

Remote control via LAN and FieldFox programming

FieldFox's can be controlled using SCPI over LAN and USB.

USB keyboard and mouse Support

FieldFox supports use of USB keyboards and mice to simplify the input of text such as file names while working in the field.



Control and view your FieldFox via iPad



Simplify text entry with a USB keyboard and mouse

Comprehensive measurement capabilities


Cable and antenna test - Return loss, VSWR - Distance-to-fault	Return loss/VSWR measurements allow you to evaluate the impedance matching performance of the feed line across the frequency range of interest.
	Distance-to-fault measurements help you identify the faults along a feed line. Use these measurements to precisely pinpoint the location of damaged or degraded antennas, connectors, amplifiers, filters, and duplexers, etc.
	FieldFox provides up to 1001 data-point resolution to help accurately locate faults and extend measurement distance.
Transmission test - Cable loss - Insertion loss - Amplifier gain	Transmission test is used to accurately measure cable loss, insertion loss (filters), and amplifier gain (tower mounted amplifier). FieldFox offers two-port transmission magnitude measurements with up to 72 dB dynamic range.
One-port cable loss	For already-installed cables, FieldFox accurately measures cable loss via the RF Out port. The instrument measures actual cable loss, without the need for additional computation.
CalReady at test port	Each instrument is calibrated at the RF Out port. When you power up the instrument, it is ready to make measurements such as one-port cable loss, VSWR, return loss, and DTF at the test port.
QuickCal	The industry's-first and only built-in calibration system allows you to calibrate the cable and antenna tester without carrying a calibration kit with you all the time. It provides worry-free accuracy and excellent repeatability.
Mechanical calibration	Open-short-load (OSL) is standard in FieldFox. There are four calibration kits defined in the instrument.
Spectrum analysis	The built-in spectrum analyzer allows you to scan up to 6 GHz and detect internal and external interference. FieldFox can detect signals as low as -148 dBm up to 6 GHz, with phase noise of -88 dBc at 10 kHz, and a third order intercept (TOI) better than +18 dBm.
Limit lines	Use limit lines or masks for pass/fail testing. You can set up both fixed and relative limit lines, or build a limit line table from a current trace.
Interference analyzer	Spectrogram and waterfall displays allow you to detect and monitor intermittent interference signals. The interested signals can be recorded and played back.
Channel scanner	Provides channel power measurements to verify signal coverage, identify potential interference issues and optimize network performance. Each channel can be custom set with different frequency and bandwidth for multiple signal analysis. Record and playback with data logging.
Field strength measurements	Antenna factors and cable loss data can be loaded using either the front panel or the Data Link software. Field strength can be displayed in dBuV/m, dBuA/m, dBG or dBpT.
GPS	Enables operators to find exact locations and time/location stamp their measurement reports. The GPS information can be displayed on the screen and saved as part of the image, data or recorded signal.



Perform and view return loss and distance-to-fault measurements at the same time




Locate interference signals

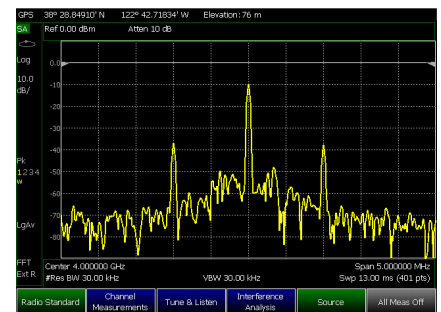


Perform spectrum analysis

Comprehensive measurement capabilities (continued)	
Independent signal source	Provides a test signal to measure coverage, antenna isolation, long cable loss, frequency offset, and align antenna direction.
Power suite measurements	Built-in spectrum analyzer provides one-button power suite measurements such as; channel power, ACPR and OBW for LTE, WiMAX, WCDMA, TD-SCDMA, cdma2000 and GSM measurements.
Custom radio standards	Use one of the pre-loaded radio standards such as GSM 1900 or WCDMA 850, or create your own custom radio standard using a csv file.
AM/FM tune and listen	The built-in spectrum analyzer can demodulate AM/FM modulated signals and play the audio via speaker or headset. This feature is very useful to identify types of signals.
Channel power meter	Channel power meter measurements provide absolute power measurements over a defined frequency bandwidth, without the need for an external power sensor.
Power meter	Makes accurate true average power measurements without bringing a power meter along. The state-of-the-art Keysight USB power sensors provide measurements up to 24 GHz.
Pulse characterization	Using USB peak sensors and FieldFox, you can measure peak power, peak to average ratio, and pulse profile parameters such as rise time, fall time and pulse repetition frequency.
Smith chart	Smith charts can be used to display impedance matching characteristics in cable and antenna systems.
Vector voltmeter	The large vector voltmeter display makes it easy to match two or more device's electric length and ensure signals that travel on different devices have the same delay.
Electrical delay	Using the electrical delay function, you can remove the linear portion of the phase shift and view the deviation from linear phase.
Port extension	Allows you to extend the reference plane after calibration. This feature is useful for measurements such as in-fixture test, where calibrating at the DUT or reference plane is cumbersome.
Network analyzer time domain	Using the time domain feature, you can display reflection or transmission coefficients versus time. Time domain gating can be used to remove unwanted responses such as connector mismatch or cable discontinuities.

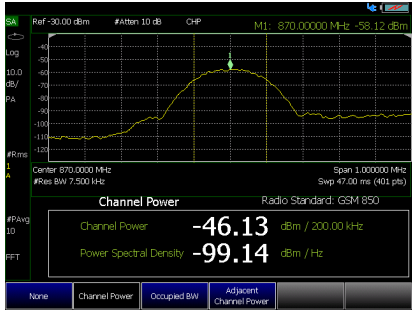

Channel power measurement

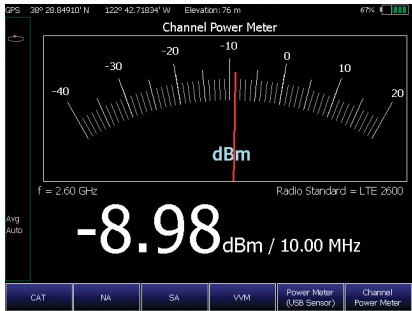

Power measurements over a defined bandwidth without an external sensor

Field-proof usability	
Transflective display and backlit keys	The display is designed for easy viewing in indoor and outdoor settings and in direct sunlight and darkness. Access different display modes via softkeys.
Task-driven key design	Front-panel keys are grouped to easily and naturally perform standard field measurements.
Speaker and headphone jack	Used for demodulated audio signal capability.
One-button measurement	Provides task-driven user interface to simplify the measurements.

Rugged design	
Water-resistant chassis, keypad and case design	The case is made from polycarbonates that withstand wide temperature ranges and salty, humid environments.
RF connector protection	A specially designed connector bay protects the RF connectors from damage during drops or other external impacts.
Dust-free design	With no vents or fans in the case, FieldFox resists dust for better equipment reliability.
Meets tough environmental standard	Meets MIL-PRF-28800F Class 2 specification.
Gasketed doors	Protects instrument interface from moisture.

Modern connectivity	
USB 2.0 ports	Two USB 2.0 ports; can be used for data transfer, GPS receiver and USB power sensor support.
LAN port	Used for SCPI programming, Data Link connection, and remote control via iOS device.
SD flash card slot	Use as a data storage device.
FieldFox Data Link software	Transfer data remotely from the instrument to a PC for back-office applications such as baseline analysis and report generation.
Remote control capability	Remotely monitor and control FieldFox using an iOS device such as iPad or iPhone, via a LAN network connection.



Transflective display makes it easy to read measurements in direct sunlight



Water resistant chassis withstands wide temperature ranges and humid environments

Specifications in Brief

A condensed version of the specifications is provided here. See the User's Guide for the complete version;
<http://cp.literature.cdn.keysight.com/litweb/pdf/N9912-90001.pdf>

Specification (spec.):

Warranted performance. Specifications include guard-bands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. The following conditions must be met:

- FieldFox has been turned on at least 10 minutes (unless otherwise stated)
- FieldFox is within its calibration cycle
- Storage or operation at 25 ± 5 °C range (unless otherwise stated)

Typical (typ.):

Expected performance of an average unit over a 20 °C to 30 °C temperature range, unless otherwise indicated; does not include guardbands. It is not covered by the product warranty. The FieldFox must be within its calibration cycle.

Nominal (nom.):

A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty.

Cable and antenna analyzer (Option 104 or 106)

Frequency

Frequency range	
Option 104	2 MHz ¹ to 4 GHz
Option 106	2 MHz ² to 6 GHz
Frequency reference	
Accuracy	±2 ppm
Aging rate	±1 ppm/yr
Temperature stability	±1 ppm over -10 to 55 °C
Frequency resolution	
2 MHz to 1.6 GHz	2.5 kHz
> 1.6 to 3.2 GHz	5 kHz
> 3.2 to 6 GHz	10 kHz
Measurement speed (sweep time) - Nominal	
Return loss, 1.75 GHz to 3.85 GHz, 1001 points, Cal ON ³	0.4 ms/point
Distance-to-fault, 0 to 500 ft, 601 points, Cal ON ⁴	0.5 ms/point
Data points	
	101, 201, 401, 601, 801, 1001 (up to 10,001 using SCPI)
Directivity	
Corrected	> 42 dB
QuickCal (Option 111)	> 42 dB (typical) ⁵
Source match	
Corrected	> 36 dB
QuickCal (Option 111)	≥ 35 dB (typical) ⁵
Reflection tracking	
Corrected	±0.06 dB
QuickCal (Option 111)	±0.15 dB (typical) ⁵

1. Spectrum analyzer (Option 230) start frequency is 100 kHz, usable to 5 kHz.

2. Spectrum analyzer (Option 231) start frequency is 100 kHz, usable to 5 kHz.

3. 1.5 ms/point; applicable for N9912A with serial number prefix < than MY5607/SG5607/US5607 and N9912A not upgraded with Option N9910HU-500

4. 2.4 ms/point; applicable for N9912A with serial number prefix < than MY5607/SG5607/US5607 and N9912A not upgraded with Option N9910HU-500

5. Requires 90 minute warm up.

Dynamic range

Reflection (RF Out port)	
2 MHz to 4 GHz	60 dB (typical)
> 4 GHz to 6 GHz	55 dB (typical)
Transmission measurement (Option 110)	
2 MHz to 2 GHz	72 dB (typical)
> 2 GHz to 3 GHz	67 dB (typical)
> 3 GHz to 5 GHz	58 dB (typical)
> 5 GHz to 6 GHz	49 dB (typical)
Output power range	
High power	
2 MHz to 4 GHz	< +8 dBm, +6 dBm (nominal)
> 4 GHz to 6 GHz	< +7 dBm, +2 dBm (nominal)
Low power	
2 MHz to 4 GHz	< -23 dBm, -25 dBm (nominal)
> 4 GHz to 6 GHz	< -24 dBm, -29 dBm (nominal)
Immunity to interference	
+16 dBm (nominal)	
Maximum input level (RF Out port)	
+23 dBm	
Maximum input DC voltage (RF Out port)	
±50 VDC	

Cable and antenna measurements

Return loss	
Display range	0 to 100 dB
Resolution	0.01 dB
VSWR	
Display range	0 to 100
Resolution	0.01
Distance to fault (DTF)	
	Range = (number of points - 1) / (span*2) x Vf (velocity factor in cable) x c (light speed)
	Resolution = range/(number of points - 1)
	Number of points: 101, 201, 401, 601, 801, 1601, 4001, 10,001 (custom number of points can be set using SCPI)
	Distance-to-fault display: return loss, VSWR, reflection coefficient
Cable loss (1-port)	
Terminated cable under test with short	
Insertion loss (2-ports)	
Requires Option 110	
Transmission measurement (Option 110)	
Frequency range	
Option 104	2 MHz to 4 GHz
Option 106	2 MHz to 6 GHz
Dynamic range	
2 MHz to 2 GHz	72 dB (typical)
2 GHz to 3 GHz	67 dB (typical)
> 3 GHz to 5 GHz	58 dB (typical)
> 5 GHz to 6 GHz	49 dB (typical)

Network analysis (Option 303)

S11	Vector measurement, S11 magnitude and S11 phase. Specification is listed under Cable and antenna analyzer section (S11/Return loss).
S21	Scalar measurement, S21 magnitude. Specification is listed under transmission measurement. S21 requires Option 110 transmission measurement.
A	Reflected power
R	Source power
Display	Log, linear, phase, VSWR, Smith chart, polar, group delay, unwrapped phase
Calibration types	
Mechanical cal, QuickCal, normalization	
IF bandwidth selections	
300 Hz, 1 kHz, 3 kHz, 10 kHz and 30 kHz	
Data points	
101, 201, 401, 601, 801, 1001, 1601, 4001, 10,001 (custom number of points can be set using SCPI)	

Vector network analyzer time domain (Option 010)

Using time domain, data from transmission or reflection measurements in the frequency domain are converted to the time domain. The time-domain response shows the measured parameter value versus time.

Time stimulus modes	
Low-pass step	This stimulus, similar to a traditional time domain reflectometer (TDR) stimulus waveform, is used to measure low-pass devices. The frequency-domain data should extend from DC (extrapolated value) to a higher value.
Low-pass impulse	This stimulus is also used to measure low-pass devices.
Bandpass impulse	The bandpass impulse stimulates a pulsed RF signal and is used to measure the time-domain response of band-limited devices.
Windows	
The windowing function can be used to filter the frequency-domain data and thereby reduce overshoot and ringing in the time-domain response.	
Gating	
The gating function can be used to selectively remove reflection or transmission time-domain responses. In converting back to the frequency domain the effects of the responses outside the gate are removed.	

Spectrum analyzer (Option 230 or 231)

Frequency

Frequency range	
Option 104	100 kHz to 4 GHz, usable to 5 kHz
Option 106	100 kHz to 6 GHz, usable to 5 kHz, tunable to 6.1 GHz
Frequency reference	
Accuracy	±2 ppm
Frequency aging	±1 ppm/yr
Temperature stability	±1 ppm over -10 to 55 °C
Frequency readout accuracy	
± (readout frequency x frequency reference accuracy + RBW centering + 0.5 x horizontal resolution)	
Frequency span	
Range	0 Hz (zero span), 10 Hz to maximum frequency
Span accuracy	±(2 x RBW centering + horizontal resolution)
Span resolution	1 Hz
Resolution bandwidth (RBW)	
Range (-3 dB bandwidth)	
Zero span	300 Hz to 1 MHz in 1-3-10 sequence; 2 MHz
Non-zero span	10 Hz to 300 kHz in 1/1.5/2/3/5/7.5/10 sequence; 1 MHz, 2 MHz
Accuracy	
	1 kHz to 1 MHz: ±5% (nominal)
	10 Hz to 100 KHz non-zero span: ±1% (nominal)
	2 MHz: ±10% (nominal)
	300 Hz zero span: ±10% (nominal)
Selectivity (-60 dB/ -3 dB)	
	4:1 (nominal)
Video bandwidth (VBW)	
Range	1 Hz to 2 MHz in 1/1.5/2/3/5/7.5/10 sequence
Stability	
Noise sidebands, CF = 1 GHz	10 kHz offset: -88 dBc/Hz (typical)
	30 kHz offset: -89 dBc/Hz, (typical)
	100 kHz offset:
	1 MHz offset: -115 dBc/Hz, (typical)
Sweep acquisition, span > 0 Hz	
Range	1 to 5000, number of data acquisitions per trace point; value is normalized to the minimum required to achieve amplitude accuracy with CW signals
Resolution	1
Readout	Measured value representing time required to tune
Trace updates	
Span = 20 MHz, RBW = 3 kHz ¹	5.9 updates/second
Span = 100 MHz, RBW auto coupled ²	16.7 updates/second
Span = 6 GHz, RBW auto coupled ³	1.7 updates/second
Trace points	
101, 201, 401, 601, 801, 1001 points, default is 401	

1. 1.5 updates/second; applicable for N9912A with serial number prefix < than MY5607/SG5607/US5607 and N9912A not upgraded with Option N9910HU-500.
2. 7 updates/second; applicable for N9912A with serial number prefix < than MY5607/SG5607/US5607 and N9912A not upgraded with Option N9910HU-500.
3. 1 updates/second; applicable for N9912A with serial number prefix < than MY5607/SG5607/US5607 and N9912A not upgraded with Option N9910HU-500.

Amplitude

Measurement range

Displayed average noise level (DANL) to +20 dBm

Input attenuator range

0 to 31 dB, 1 dB steps

Maximum DC voltage at RF In port

±50 VDC

Maximum input power at RF In port

+27 dBm (0.5 W)

Displayed average noise level (DANL)

10 Hz RBW, 10 Hz VBW, 50 ohm termination input, 0 dB attenuation, average detector

Preamplifier OFF

20 to 30 °C

10 MHz to 2.4 GHz	-130 dBm (typical)
> 2.4 to 5 GHz	-125 dBm (typical)
> 5 to 6 GHz	-119 dBm (typical)

Preamplifier ON (Option 235)

20 to 30 °C

10 MHz to 2.4 GHz	-148 dBm (typical)
> 2.4 to 5 GHz	-145 dBm (typical)
> 5 to 6 GHz	-138 dBm (typical)

-10 to 55 °C

10 MHz to 2.4 GHz	< -141 dBm
> 2.4 to 5 GHz	< -138 dBm
> 5 to 6 GHz	< -130 dBm

Total absolute amplitude accuracy¹

Peak detector, 10 dB attenuation, preamplifier off, RBW < 2 MHz, input signal 0 dBm to -50 dBm, all settings auto-coupled

20 to 30 °C

2 MHz to 10 MHz	± 1.80 dB	± 0.60 dB (typical)
> 10 MHz to 3 GHz	± 1.50 dB	± 0.50 dB (typical)
> 3 to 5 GHz	± 1.90 dB	± 0.60 dB (typical)
> 5 to 6 GHz	± 2.10 dB	± 0.60 dB (typical)

Second harmonic distortion (SHI)

-30 dBm signal at input mixer

2 MHz to 1.35 GHz	< -70 dBc, +40 dBm SHI (nominal)
1.35 to 3 GHz	< -80 dBc, +50 dBm SHI (nominal)

1. Requires 90 minute warm up

Third order intermodulation distortion (TOI)

Two -30 dBm tones at input mixer, > 100 kHz tone separation

< -96 dBc, +18 dBm TOI (nominal)

Residual responsesInput terminated, 0 dB attenuation, preamplifier off, RBW $\leq$ 1 kHz, VBW auto-coupled

20 MHz to 3 GHz -90 dBm (nominal)

> 3 to 6 GHz -85 dBm (nominal)

Spurious responses**Input mixer level -30 dBm**

RFsig = RFtune + 417 MHz -70 dBc (nominal)

RFsig = RFtune + 1.716 GHz -80 dBc (nominal)

Input mixer level -10 dBm, first IF image responseRFsig = RFtune - 2 x 0.8346 GHz,
for RFtune 5.7 to 6.0 GHz -50 dBc (nominal)**Sidebands** -80 dBc (nominal)

-60 dBc (nominal) when battery charging, 260 kHz offset

Preamplifier (Option 235 requires Option 230 or 231)

Option 230 100 kHz to 4 GHz

Option 231 100 kHz to 6 GHz

Gain 22 dB (nominal)

Reference level

Range -170 dBm to +30 dBm

Resolution 0.1 dB

Accuracy 0 dB (no error)

Traces

4 traces, data/max/average/min

Detectors

Normal, positive peak, negative peak, sample, average

Markers

Marker types Normal, noise marker, band/interval marker, frequency counter marker

Number of markers or delta markers 6

Marker functions Peak, next peak, peak left, peak right, marker to center, minimum search

RF In VSWR

1.5:1 (50 ohm)

Channel scanner (Option 312)

	Description
Scan Mode	Range or custom list
Display Type	Bar chart vertical, bar chart horizontal, channel power, strip chart, chart overlay, scan & listen
Data logging mode	Time with geo tagging
Trace playback and recording	Record channel power measurement
	Store data internally or USB or SD card in .csv or .kml format
	Playback recorded data using FieldFox
	Data in .kml format can be exported to Google Earth

Independent signal source or tracking generator

The independent source or tracking generator is included with either spectrum analyzer option 230 or 231. The source can be used in continuous wave (CW) or stimulus/response (S/R) mode. In CW mode, the source frequency is independent of the receiver frequency. The source can be tuned to a frequency that is different from the receiver. In stimulus/response mode, the source operates the same as a traditional tracking generator – the receiver tracks the source.

Frequency range	
2 MHz to 4 GHz (Option 230) or 2 MHz to 6 GHz (Option 231)	
Amplitude	
High power	2 MHz to 4 GHz < +8 dBm, +6 dBm (nominal)
	> 4 to 6 GHz < +7 dBm, +2 dBm (nominal)
Low power	2 MHz to 4 GHz < -23 dBm, -25 dBm (nominal)
	> 4 to 6 GHz < -24 dBm, -29 dBm (nominal)
Attenuation	0 to 31 dB
Functions	Continuous wave, stimulus / response

Channel power meter (Option 311)

Channel power meter is a built-in power measurement that does not require an external power sensor. Users can set the center frequency and channel bandwidth. The results are shown on a large analog display.

Frequency range		
100 kHz to 4/6 GHz		
Power accuracy ¹		
Frequency range	Spec	Typical
2 MHz to 10 MHz	± 1.8 dB	± 0.60 dB
> 10 MHz to 3.0 GHz	± 1.5 dB	± 0.50 dB
> 3.0 GHz to 5.0 GHz	± 1.9 dB	± 0.60 dB
> 5.0 GHz to 6.0 GHz	± 2.1 dB	± 0.60 dB

Power meter measurement with USB sensor (Option 302)

Support for Keysight USB average and peak power sensors. Frequency and power range dependent on sensor. List of supported sensors: www.keysight.com/find/usbsensorsforfieldfox.

Pulse measurements with USB peak power sensor (Option 330)

FieldFox's pulse measurement option can be used to characterize RF pulses such as those used in radar and electronic warfare systems. Measurements are made using FieldFox and Keysight's UBS peak power sensors. Performance specifications such as frequency, dynamic range and minimum pulse width depend on the peak power sensor. Supported peak power sensors: www.keysight.com/find/usbsensorsforfieldfox.

1. Specification requires 90 minute warm-up

Remote control capability with iPad or iPhone (Option 030)

Users can now remotely monitor and control their FieldFox using their iOS device such as an iPad, iPhone, or iPod Touch. FieldFox's Remote Viewer iOS app emulates the front panel of the unit, so users can simply press any FieldFox key right from their iOS device, including the hardkeys or softkeys.

With this technology, FieldFox can now be placed in areas where users do not wish to stay long due to extremely harsh or unsafe conditions. Additionally, if one technician or engineer has trouble making a measurement or determining the source of a problem, another can step in to remotely troubleshoot and solve the problem, which helps minimize rework and multiple trips. When the application is launched, users can access the FieldFox demo videos and technical literature such as user guides, application notes, and datasheets.

Accessing this information via the FieldFox app helps engineers and technicians in the field quickly find the data they need to resolve issues as they arise. Such capabilities also make the app ideal for training and educational purposes.

The iOS device and FieldFox communicate via a WLAN or broadband data connection. Without Option 030, users can remotely view the live display screen of their FieldFox, but cannot control the instrument.

General specifications

Connector type

Type-N (female)

Input impedance

50 ohm

External reference

Input type BNC female

Reference frequency 10 MHz

Required level -5 dBm to 10 dBm

Display

6.5" transfective, color VGA LED backlit 640 x 480 with anti-glare coating

Speaker

Built-in speaker

Headphone jack

Built-in headphone jack

Connectivity

2 x USB 2.0; 1 x mini USB; 1 x LAN

GPS

Latitude, longitude, elevation and accurate time are provided. The GPS information can be displayed on the screen, and saved as part of the image, data, or recording file. The GPS capability is standard with all N9912A FieldFox RF analyzers. An external USB GPS receiver is required. Keysight recommends the Microsoft Streets & Trips, or Microsoft AutoRoute with GPS locator.

Internal storage

Minimum 4 GB, up to 1000 traces

External storage

1 x micro SD slot and 2 x USB 2.0

EMC

Complies with European EMC Directive 2004/108/EC

– IEC/EN 61326-2-1)

– CISPR Pub 11 Group 1, Class A

– AS/NZS CISPR 11

– ICES/NMB-001

General specifications continued

ESD

- IEC/EN 61000-4-2, functional up to 20 kV test

Safety

Complies with European Low Voltage Directive 2006/95/EC

- IEC/EN 61010-1 2nd Edition
- Canada: CSA C22.2 No. 61010-1-04
- USA: UL 61010-1 2nd Edition

Environmental

Meets MIL-PRF-28800F Class 2 specification

Humidity	95% at 40 °C
----------	--------------

Temperature

Operating	-10 °C to +55 °C
Non-operating	-51 °C to 71 °C

Weight

6.2 lbs / 2.8 kg including battery

Dimensions (H x W x D)

11.5" x 7.4" x 2.8" (292 x 188 x 72 mm)

Power

Power supply	External DC input: 15 to 19 VDC
--------------	---------------------------------

External AC power adapter

Input	100 to 250 VAC, 50 to 60 Hz; 1.25 to 0.56 A
Output	15 VDC, 4 A
Power consumption	12 W
Battery	6 cell Lithium Ion, 10.8 V, 4.6 A-h
Battery operating time	4 hours

Languages

English, Chinese, French, Spanish, Japanese, Russian, German, Italian, Turkish, Portuguese, and Korean

Configuration Information

N9912A FieldFox RF analyzer

FieldFox RF Analyzer base functions: One port cable and antenna analyzer (4 GHz), broadband calibration, CalReady, standard mechanical cal kit support. Measurements include: return loss, distance-to-fault (DTF), one port cable loss and VSWR.

Standard accessories included N9912A: AC/DC adapter; battery; soft carrying case comes with backpack and shoulder straps; Quick Reference Guide; User's Guide

N9912A FieldFox Options

Option 104	4 GHz cable and antenna analyzer
Option 106	6 GHz cable and antenna analyzer
Option 010	Network analyzer time domain
Option 030	Remote control capability (from iOS device)
Option 110	Transmission measurement
Option 111	QuickCal
Option 230	4 GHz spectrum analyzer (requires Option 104)
Option 231	6 GHz spectrum analyzer (requires Option 106)
Option 235	Preamplifier for spectrum analyzer (requires Option 230 or 231)
Option 236	Interference analyzer
Option 302	External USB power sensor support
Option 303	Network analysis capability
Option 308	Vector voltmeter
Option 311	Channel power meter
Option 312	Channel scanner
Option 330	Pulse measurements (requires USB peak power sensor)

N9912A upgrades

The following upgrades are available for the N9912A FieldFox RF Analyzer. More information regarding upgrades is available at: www.keysight.com/find/fieldfoxsupport

Product number	Description	Additional requirements
N9912AU-110	Add transmission measurement capability Allows use of second port in NA and CAT modes.	None
N9912AU-111	Add QuickCal	None
N9912AU-230	Add 4 GHz spectrum analyzer May only be installed on 4 GHz instrument.	4 GHz unit only, Option 104
N9912AU-231	Add 6 GHz spectrum analyzer May only be installed on 6 GHz instrument.	6 GHz unit only, Option 106
N9912AU-235	Add preamplifier to spectrum analyzer	Spectrum analyzer Option, 230 or 231
N9912AU-236	Add interference analyzer	Spectrum analyzer Option, 230 or 231
N9912AU-302	Add external USB power sensor support	None
N9912AU-303	Add network analyzer capability; one port only For second port, add Option 110.	None
N9912AU-308	Vector voltmeter	None
N9912AU-010	Add network analyzer time domain	Network analyzer Option 303
N9912AU-311	Add channel power meter	None
N9912AU-030	Add remote control capability	None
N9912AU-330	Add pulse measurements (requires USB peak power sensor)	None
N9912AU-312	Add channel scanner capability	Spectrum analyzer Option, 230 or 231

Configuration Information continued

FieldFox RF analyzer hardware upgrade

Option ^{1,2}	Description	Upgrade contents	Additional requirements
N9910HU-500	N9912A/N9923A processor	N9912A/N9923A processor upgrade	Return to service center only

1. Upgrades are not available for FieldFox analyzers with serial number prefix starting with MY5607/SG5607/US5607, as this analyzer already has the improved hardware.
2. Please contact your local Keysight Service Center for instructions on how and where to send the instrument, and how to order the factory upgrades.

N9910X RF/MW handheld analyzer accessories


N9910X-800	T-calibration kit, DC to 6 GHz, Type-N (m)
N9910X-801	T-calibration kit, DC to 6 GHz, Type-N (f)
N9910X-802	T-calibration kit, DC to 6 GHz, 7/16 DIN (m)
N9910X-803	T-calibration kit, DC to 6 GHz, 7/16 DIN (f)
85514A	4-in-1 OSLT mechanical calibration kit, DC to 9 GHz, Type-N (m), 50 ohm
85515A	4-in-1 OSLT mechanical calibration kit, DC to 9 GHz, Type-N (f), 50 ohm
N9910X-810	Rugged phase-stable cable, Type-N (m) to Type-N (m), 5 ft
N9910X-811	Rugged phase-stable cable, Type-N (m) to Type-N (f), 5 ft
N9910X-812	Rugged phase-stable cable, Type-N (m) to Type-N (m), 12 ft
N9910X-813	Rugged phase-stable cable, Type-N (m) to Type-N (f), 12 ft
N9910X-814	Rugged phase-stable cable, Type-N (m) to 7/16 (m), 5 ft
N9910X-815	Rugged phase-stable cable, Type-N (m) to 7/16 (m), 12 ft
N9910X-816	Rugged phase-stable cable, Type-N (m) to Type-N (f), 3.28 ft
N9910X-817	Rugged phase-stable cable, Type-N (m) to Type-N (m), 3.28 ft
N9910X-820	Antenna, directional, multiband, 800 to 2500 MHz, 10 dBi
N9910X-821	Antenna, telescopic whip, 70 MHz to 1 GHz
N9910X-843	Coaxial adapter, Type-N (m) to 7/16 DIN (f)
N9910X-845	Adapter kit: Type-N (f) to 7/16 DIN (f), Type-N (f) to 7/16 DIN (m), Type-N (f) to Type-N (f)
N9910X-846	Coaxial adapter, Type-N (m) 50 ohm to Type-N (f) 75 ohm (Recommend quantity 2 for 75 ohm measurements)
N9910X-860	Fixed attenuator, 40 dB, 100 W, DC to 3 GHz, Type-N (m) to Type-N (f)
N9910X-861	Fixed attenuator, 40 dB, 50 W, DC to 8.5 GHz, Type-N (m) to Type-N (f)
N9910X-870	Extra battery
N9910X-872	External battery charger
N9910X-873	AC/DC adapter
N9910X-874	External bias-tee, 2.5 MHz to 6 GHz, 1 W, 0.5 A
N9910X-875	DC car charger and adapter
N9910X-880	Extra soft carrying case with backpack and shoulder strap
N9910X-881	Hard transit case

For more information go to: www.keysight.com/find/fieldfox

Configuration Information continued




Directional antenna, N9910X-820

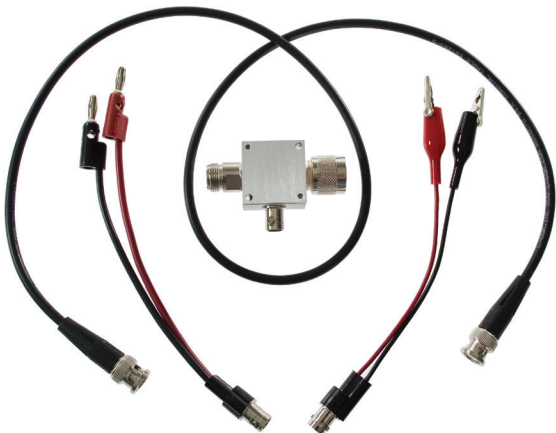

Bias-tees, N9910X-874



Antenna, N9910X-821



100 Watt attenuator, N9910X-860



Phase stable cable, N9910X-810



85514A



85515A



Adapter kit, N9910X-845



DC car charger and adapter, N9910X-875



N9910X-800



N9910X-801



N9910X-802



N9910X-803

T-Cal kits



Soft carrying case with backpack and shoulder straps included with a standard N9912A. For an extra soft carrying case order N9910X-880



Hard transit case, N9910X-881

FieldFox fits inside hard transit case



AC/DC adapter, N9910X-873





External battery charger, N9910X-872

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/fieldfox

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



Unlocking Measurement Insights

This information is subject to change without notice.

© Keysight Technologies, 2017
Published in USA, December 1, 2017
5989-8618EN

www.keysight.com