

# Keysight Add 4-Port Capability Upgrade Kit

To Upgrade PNA-X N5241A, N5242A or N5249A  
Option 224 to Option 423

Upgrade Kit Order Number: N5241AU- 944,  
N5242AU- 944 and N5249AU- 944

Keysight Kit Number: N5242-60109

# Notices

© Keysight Technologies, Inc.  
2009-2020

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies, Inc. as governed by United States and international copyright laws.

## Trademark Acknowledgments

## Manual Part Number

N5242-90017

## Edition

Edition 1, July 2020

Supersedes: November 2019

Printed in USA/Malaysia

Published by:  
Keysight Technologies  
1400 Fountaingrove Parkway  
Santa Rosa, CA 95403

## Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS

COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

## Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

## U.S. Government Rights

The Software is "commercial computer software," as defined by Federal Acquisition Regulation ("FAR") 2.101. Pursuant to FAR 12.212 and 27.405-3 and Department of Defense FAR Supplement ("DFARS") 227.7202, the U.S. government acquires commercial computer software under the same terms by which the software is customarily provided to the public.

Accordingly, Keysight provides the Software to U.S. government customers under its standard commercial license, which is embodied in its End User License Agreement (EULA), a copy of which can be found at

<http://www.keysight.com/find/sweula>

The license set forth in the EULA represents the exclusive authority by which the U.S. government may use, modify, distribute, or disclose the Software. The EULA and the license set forth therein, does not require or permit, among other things, that Keysight: (1) Furnish technical information related to commercial computer software or commercial computer software documentation that is not customarily provided to the public; or (2) Relinquish to, or otherwise provide, the government rights in excess of these rights customarily provided to the public to use, modify, reproduce, release, perform, display, or disclose commercial computer software or commercial computer software

documentation. No additional government requirements beyond those set forth in the EULA shall apply, except to the extent that those terms, rights, or licenses are explicitly required from all providers of commercial computer software pursuant to the FAR and the DFARS and are set forth specifically in writing elsewhere in the EULA. Keysight shall be under no obligation to update, revise or otherwise modify the Software. With respect to any technical data as defined by FAR 2.101, pursuant to FAR 12.211 and 27.404.2 and DFARS 227.7102, the U.S. government acquires no greater than Limited Rights as defined in FAR 27.401 or DFARS 227.7103-5 (c), as applicable in any technical data.

## Safety Notices

### CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a CAUTION notice until the indicated conditions are fully understood and met.

### WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a WARNING notice until the indicated conditions are fully understood and met.

## Description of the Upgrade

**NOTE**

In June 2013, the N5241A/AS and N5242A/AS analyzers underwent significant hardware changes. Some components that have 2.4 mm connectors (bias tees, couplers, and some semi-rigid cables) were replaced with components that have 3.5 mm connectors.

If your analyzer's serial number prefix is MY/SG/US5310 and below: Your analyzer was originally shipped with 2.4 mm components. Bias tees with 2.4 mm connectors are no longer available, so the bias tees and connecting cables included in this kit have 3.5 mm connectors. Since they are interconnected, the 2.4 mm couplers and connecting cables in your analyzer must be replaced with the new 3.5 mm items included in this kit.

If your analyzer's serial number prefix is MY/SG/US5321 and above: Your analyzer was shipped with 3.5 mm components, so it is not necessary to replace the couplers and connecting cables. These items are included in this kit, but will not be used for your upgrade. Set them aside for possible use in the future.

Be very careful to use the appropriate hardware in your analyzer. Using the wrong hardware can ruin analyzer components, resulting in additional customer costs.

---

This upgrade converts your N5241A or N5242A Option 224 2-port analyzer to a N5241A or N5242A Option 423 4-port analyzer by adding:

- an additional source bypass switch
- an additional mixer brick
- two additional bridges
- four couplers
- four bias tees
- two additional source attenuators
- two additional receiver attenuators
- a splitter
- a modified front panel, including 2 new test ports
- many new cables

Getting Assistance from Keysight

## Getting Assistance from Keysight

By internet or phone, get assistance with all your test and measurement needs.

### Contacting Keysight

Assistance with test and measurements needs and information on finding a local Keysight office are available on the Web at:

<http://www.keysight.com/find/assist>

If you do not have access to the Internet, please contact your Keysight field engineer.

#### NOTE

In any correspondence or telephone conversation, refer to the Keysight product by its model number and full serial number. With this information, the Keysight representative can determine whether your product is still within its warranty period.

---

### If You Have Problems With the Upgrade Kit Contents

Keysight stands behind the quality of the upgrade kit contents. If you have problems with any item in the kit, refer to [www.keysight.com](http://www.keysight.com) and the [Contact Keysight](#) link.

## Getting Prepared

### CAUTION

The PNA contains extremely sensitive components that can be ruined if mishandled. Follow instructions carefully when making cable connections, especially wire harness connections.

The person performing the work accepts responsibility for the full cost of the repair or replacement of damaged components.

---

To successfully install this upgrade kit, you will need the following:

- A license key - refer to **“License Key Redemption”** below.
- A PDF copy or a paper copy of the PNA Service Guide - refer to **“Downloading the Online PNA Service Guide”** below.
- An ESD-safe work area - refer to **“Protecting Your Workspace from Electrostatic Discharge”** below.
- Correct tools - refer to **“Tools Required for the Installation” on page 6.**
- Enough time - refer to **“About Installing the Upgrade” on page 6.**
- Test equipment for the post-upgrade adjustments. To view the equipment list, click the Chapter 3 bookmark “Tests and Adjustments” in the PDF Service Guide<sup>1</sup>.

## License Key Redemption

### NOTE

The enclosed Option Entitlement Certificate is a receipt, verifying that you have purchased a licensed option for the PNA of your choice. You must now use a Keysight Web page to request a license key for the instrument that will receive the option.

---

To enable the option product, you must request a license key from:

<http://www.keysight.com/find/softwarelicense>. To complete the request, you will need to gather the following information:

- From the certificate
  - Order number
  - Certificate number
- From your instrument
  - Model number
  - Serial number
  - Host ID

---

1. See **“Downloading the Online PNA Service Guide” on page 5.**

## Getting Prepared

The instrument information is available on the network analyzer – on the analyzer’s Help menu, click About Network Analyzer.

If you provide an email address, Keysight will promptly email your license key. Otherwise, you will receive your license key via postal mail.

## Downloading the Online PNA Service Guide

To view the online Service Guide for your PNA model number, use the following steps:

1. Go to [www.keysight.com](http://www.keysight.com).
2. In the Search box, enter the model number of the analyzer (For example: N5242A) and click **Search**.
3. Click Technical Support > Manuals.
4. Click Service Manual.
5. Click the service guide title to download the PDF file.
6. When the PDF of the Service Guide is displayed, scroll through the Contents section bookmarks to locate the information needed.

## Protecting Your Workspace from Electrostatic Discharge

For information, click on the Chapter 1 bookmark, “Electrostatic Discharge Protection” in the PDF Service Guide<sup>1</sup>.

## ESD Equipment Required for the Installation

Description	Keysight Part Number
ESD grounding wrist strap	9300-1367
5-ft grounding cord for wrist strap	9300-0980
2 x 4 ft conductive table mat and 15-ft grounding wire	9300-0797
ESD heel strap (for use with conductive floors)	9300-1308

## Tools Required for the Installation

Description	Qty	Part Number
T-8 TORX driver - set to 6 in-lbs (0.68 N.m)	1	N/A
T-10 TORX driver - set to 9 in-lbs (1.02 N.m)	1	N/A
T-20 TORX driver - set to 21 in-lbs (2.38 N.m)	1	N/A
5/16-in (8 mm) nutsetter or open end torque wrench- set to 10 in-lbs (1.13 N.m)	1	N/A
5/16-in (8 mm) nutsetter or open end torque wrench- set to 21 in-lbs (2.38 N.m)	1	N/A
3/16-in (5 mm) nutsetter or open end torque wrench- set to 6 in-lbs (0.68 N.m)	1	N/A
5/8-in (16 mm) nutsetter or open end torque wrench- set to 21 in-lbs (2.38 N.m)	1	N/A
1-in (25.4 mm) torque wrench - set to 72 in-lbs (8.15 N.m)	1	N/A
1/4-in (6 mm) open end wrench	1	N/A

### CAUTION

Use a 5/16-in torque wrench set to 10 in-lbs on all cable connections except the front and rear panel bulkhead connectors. Torque these connections to 21 in-lb.

## About Installing the Upgrade

Products affected.....	N5241A, N5242A and N5249A Option 224
Installation to be performed.....	byKeysight service center or personnel qualified by Keysight
Estimated installation time.....	.5 hours
Estimated adjustment time.....	.0.5 hours
Estimated full instrument calibration time.....	.4.5 hours

## Items Included in the Upgrade Kit

## Items Included in the Upgrade Kit<sup>1</sup>

Check the contents of your kit against the following list. If any part is missing or damaged, contact Keysight Technologies. Refer to **“Getting Assistance from Keysight” on page 3**.

**Table 1** Contents of Upgrade Kit N5242-60109

Ref Desig.	Description	Qty	Part Number
-	Installation note (this document)	1	N5242-90017
A22	Splitter	1	5087-7139
A24	Mixer brick 2	1	5087-7829
A26	Test port 3 bridge	2	5087-7757
A27	Test port 4 bridge		
A29	Test port 1 coupler		5087-7813
A30	Test port 3 coupler	4	
A31	Test port 4 coupler		
A32	Test port 2 coupler		
A35	Test port 3 source attenuator	2	33321-60077
A36	Test port 4 source attenuator		
A38	Test port 1 bias tee (includes wire harness)	4	5067-4865
A39	Test port 3 bias tee (includes wire harness)		
A40	Test port 4 bias tee (includes wire harness)		
A41	Test port 2 bias tee (includes wire harness)		
A43	Test port 3 receiver attenuator	2	33321-60078
A44	Test port 4 receiver attenuator		
A48	Port 4 source bypass switch	1	N1811-60028
-	Bulkhead connector assembly for test set front plate	18	1250-3805
-	Machine screw, M2.0 x 20, pan head (to attach bypass switch to bracket)	2	0515-1992
-	Machine screw, M3.0 x 6, flat head (to attach lower front dress panel to the test set front plate)	4	0515-1227
-	Machine screw, M3.0 x 20, pan head (to attach mixer brick 2 to mounting block; to attach 2 bridges to brackets)	7	0515-1410
-	Machine screw, M3.0 x 8, pan head (to attach mixer brick 2 to mounting block; to attach 2 source attenuators and 2 receiver attenuators to brackets)	12	0515-0372
-	Machine screw, M3.0 x 6, pan head (to attach 2 bridges to deck; to attach 2 attenuator brackets to deck)	12	0515-0430

1. In addition to the upgrade kit, the shipment includes an Option Entitlement Certificate. Refer to **“License Key Redemption” on page 4** for important information about this certificate.

Table 1 Contents of Upgrade Kit N5242-60109

Ref Desig.	Description	Qty	Part Number
-	Machine screw, M3.0 x 14, pan head (to attach 2 bias tees to brackets)	6	0515-2994
-	Front frame, 1-piece, machined, 4-port	1	N5247-20141
-	Lower front panel overlay, 4-port (all instruments without Option 029)	1	N5222-80006
-	Keypad overlay	1	N5242-80005
-	Power switch overlay	1	N5242-80007
-	Nameplate, N5241A	1	N5241-80001
-	Nameplate, N5242A	1	N5242-80006
-	Test set front sub panel, 4-port	1	N5221-00007
-	Gap pad (between each coupler and test set front sub panel)	4	E4403-20033
-	Vibration mount (between couplers 1 & 3, and 2 & 4)	2	0460-2725
-	Mounting nut (for port 3 & 4 test port couplers)	2	5022-1087
-	Short (for Mixer Brick A24) (NOT for option 029)	1	0960-0055
-	Cable guard	1	N5242-00030
-	Tie wrap, 1 to secure cables to side of deck	6	1400-0249
-	Bracket for source bypass switch	1	N5242-00009
-	Bracket for test port bridge	2	N5242-00006
-	Bracket for source or receiver attenuator	2	N5242-00007
-	Dust cap for test port	4	1401-0214
W14	A29 port 1 coupler to front-panel Port 1 CPLR ARM	1	N5222-20030
W17	A26 port 3 bridge to front-panel REF 3 SOURCE OUT	1	N5222-20023
W18	A30 port 3 coupler to front-panel Port 3 CPLR ARM	1	N5222-20015
W21	A27 port 4 bridge to front-panel REF 4 SOURCE OUT	1	N5222-20025
W22	A31 port 4 coupler to front-panel Port 4 CPLR ARM	1	N5222-20018
W26	A32 port 2 coupler to front-panel Port 2 CPLR ARM	1	N5222-20034
W30	Front panel jumpers	6	N5222-20091
W38	Front-panel REF 3 RCVR R3 IN to A24 mixer brick (R3)	1	N5242-20270
W39	Front-panel REF 4 RCVR R4 IN to A24 mixer brick (R4)	1	N5242-20271
W42	A21 HMA26.5 to A22 splitter	1	N5222-20009
W43	A22 splitter to A23 mixer brick	1	N5222-20007
W44	A22 splitter to A24 mixer brick	1	N5222-20008
W52	A23 mixer brick (R1) to A20 IF multiplexer (P411)	1	N5242-60021
W53	A23 mixer brick (R2) to A20 IF multiplexer (P412)	1	N5242-60022
W55	A24 mixer brick (D) to A20 IF multiplexer (P801)	1	N5242-60024

Items Included in the Upgrade Kit

**Table 1** Contents of Upgrade Kit N5242-60109

Ref Desig.	Description	Qty	Part Number
W56	A24 mixer brick (R4) to A20 IF multiplexer (P414)	1	N5242-60019
W57	A24 mixer brick (R3) to A20 IF multiplexer (P413)	1	N5242-60020
W58	A24 mixer brick (C) to A20 IF multiplexer (P601)	1	N5242-60023
W60	A20 IF multiplexer (P203) to A12 SPAM (J2)	1	N5242-60013
W62	A20 IF multiplexer (P603) to A12 SPAM (J5)	1	N5242-60015
W73	A38 port 1 bias tee to Port 1 CPLR THRU	1	N5222-20029
W74	A38 port 1 bias tee to A29 port 1 coupler	1	N5222-20012
W75	A26 port 3 bridge to A35 port 3 source attenuator	1	N5222-20002
W76	A35 port 3 source attenuator to front-panel Port 3 SOURCE OUT	1	N5222-20019
W77	Front-panel port 3 CPLR THRU to A39 port 3 bias tee	1	N5222-20016
W78	A39 port 3 bias tee to A30 port 3 coupler	1	N5222-20011
W79	A27 port 4 bridge to A36 port 4 source attenuator	1	N5222-20001
W80	A36 port 4 source attenuator to front-panel Port 4 SOURCE OUT	1	N5222-20020
W81	Front-panel port 4 CPLR THRU to A40 port 4 bias tee	1	N5222-20017
W82	A40 port 4 bias tee to A31 port 4 coupler	1	N5222-20014
W85	A41 port 2 bias tee to front panel port 2 CPLR THRU	1	N5222-20035
W86	A41 port 2 bias tee to A32 port 2 coupler	1	N5222-20013
W89	Front-panel port 3 RCVR C IN to A43 port 3 receiver attenuator	1	N5222-20021
W90	A43 port 3 receiver attenuator to A24 mixer brick (C)	1	N5242-20306
W91	Front-panel port 4 RCVR D IN to A44 port 4 receiver attenuator	1	N5222-20022
W92	A44 port 4 receiver attenuator to A24 mixer brick (D)	1	N5242-20307
W102	A47 port 3 bypass switch to A26 port 3 bridge	1	N5242-20263
W105	W7 to A48 port 4 bypass switch	1	N5242-20267
W106	A87 port 4 source bypass switch to A27 port 4 bridge	1	N5242-20261
W107	A48 port 4 source bypass switch to rear panel PORT 4 SW SRC OUT (J4)	1	N5242-20283
W108	A48 port 4 source bypass switch to rear panel PORT 4 SW TSET IN (J3)	1	N5242-20284
W113	Rear panel jumper	1	N5222-20091
-	Ribbon cable, A19 test set motherboard J202 to A35 port 3 source attenuator	2	N5242-60008
-	Ribbon cable, A19 test set motherboard J203 to A36 port 4 source attenuator		
-	Ribbon cable, A19 test set motherboard J206 to A43 port 3 receiver attenuator	2	8121-0982
-	Ribbon cable, A19 test set motherboard J207 to A44 port 4 receiver attenuator		
-	Ribbon cable, A19 test set motherboard J213 to A24 mixer brick 2	1	N5242-60006

Table 1 Contents of Upgrade Kit N5242-60109

Ref Desig.	Description	Qty	Part Number
A PNA Option 224 with Option 029 being upgraded to Option 423 with Option 029 will require the items previously listed and the following items also.			
-	Lower front panel overlay, 4-port (all instruments with Option 029)	1	N5242-80012
W140	A24 mixer brick to A55 noise downconverter	1	N5242-20294

## Installation Procedure for the Upgrade

The network analyzer must be in proper working condition prior to installing this option. Any necessary repairs must be made before proceeding with this installation.

### **WARNING**

This installation requires the removal of the analyzer's protective outer covers. The analyzer must be powered down and disconnected from the mains supply before performing this procedure.

---

### Overview of the Installation Procedure

- Step 1. Obtain a Keyword and Verify the Information.
- Step 2. Remove the Outer Cover.
- Step 3. Remove the Inner Cover.
- Step 4. Remove the Front Panel Assembly.
- Step 5. Remove the A19 Test Set Motherboard.
- Step 6. Remove the A20 IF Multiplexer Board.
- Step 7. Remove Some Cables.
- Step 8. Remove the A23 Mixer Brick Assembly.
- Step 9. Assemble the A24 Mixer Brick and A22 Splitter.
- Step 10. Assemble the A26 and A27 Test Port Bridges.
- Step 11. Install the Mixer Bricks Assembly and Test Port Bridge Assemblies.
- Step 12. Assemble the A35, A36 Source Attenuators and the A43, A44 Receiver Attenuators.
- Step 13. Install the Bias Tees and the Attenuator Assemblies.
- Step 14. Assemble the Port 4 Source Bypass Switch Assembly.
- Step 15. Install the Port 4 Source Bypass Switch Assembly.
- Step 16. Assemble the A29 - A32 Test Port Coupler Assemblies.
- Step 17. Install the LED Boards and Test Port Coupler Assemblies to the Test Set Front Plate.
- Step 18. Install the Bulkhead Connectors in the Test Set Front Plate.
- Step 19. Install the Coupler Plate Assembly to the Deck.
- Step 20. Install the Bulkhead Connectors and Jumper on the Rear Panel.
- Step 21. Install the Test Set Cables.
- Step 22. Reinstall the A20 IF Multiplexer Board.
- Step 23. Reinstall the A19 Test Set Motherboard.
- Step 24. Disassemble the 2-Port Front Panel and Assemble the 4-Port Front Panel.
- Step 25. Reinstall the Front Panel Assembly.

**Step 26. Install the Front Panel Overlays.**

**Step 27. Install the Jumper Cables.**

**Step 28. Position the Cables and Wires to Prevent Pinching.**

**Step 29. Reinstall the Inner Cover.**

**Step 30. Reinstall the Outer Cover.**

**Step 31. Install the Cable Guard.**

**Step 32. Remove Option 224 and Option 219 Licenses.**

**Step 33. Enable Options P04, 419, and 423.**

**Step 34. Perform Post-Upgrade Adjustments and Calibration.**

**Step 35. Prepare the PNA for the User.**

## Step 1. Obtain a Keyword and Verify the Information

Follow the instructions on the Option Entitlement Certificate supplied to obtain a license key for installation of this upgrade. Refer to **“License Key Redemption” on page 4**.

Verify that the model number, serial number, and option number information on the license key match those of the instrument on which this upgrade will be installed.

If the model number, serial number, or option number do not match those on your license key, you will not be able to install the option. If this is the case, contact Keysight for assistance before beginning the installation of this upgrade. Refer to **“Contacting Keysight” on page 3**.

Once the license key has been received and the information verified, you can proceed with the installation at step 2.

## Step 2. Remove the Outer Cover

For instructions, click the Chapter 7 bookmark “Removing the Covers” in the PDF Service Guide<sup>1</sup>.

## Step 3. Remove the Inner Cover

For instructions, click the Chapter 7 bookmark “Removing the Covers” in the PDF Service Guide<sup>1</sup>.

## Step 4. Remove the Front Panel Assembly

For instructions, click the Chapter 7 bookmark “Removing and Replacing the Front Panel Assembly” in the PDF Service Guide<sup>1</sup>.

---

1. See **“Downloading the Online PNA Service Guide” on page 5**.

## Step 5. Remove the A19 Test Set Motherboard

For instructions, click the Chapter 7 bookmark “Removing and Replacing the A19 Test Set Motherboard” in the PDF Service Guide<sup>1</sup>.

## Step 6. Remove the A20 IF Multiplexer Board

For instructions, click the Chapter 7 bookmark “Removing and Replacing the A20 IF Multiplexer Board” in the PDF Service Guide<sup>1</sup>.

## Step 7. Remove Some Cables

### NOTE

Leave the gray flexible cables, the wire harnesses, and the ribbon cables connected where possible. Any that are removed should be labeled for reconnection later.

### CAUTION

Be careful not to damage the center pins of the semi-rigid cables. Some flexing of the cables may be necessary but do not over-bend them.

1. Place the analyzer bottom-side up on a flat surface.
2. Remove and discard the following gray flexible cables:
  - W150 A20 IF multiplexer (P203) to A12 SPAM (J5)
  - W149 A20 IF multiplexer (P603) to A12 SPAM (J2)
3. Remove all bottom-side (test set) semirigid cables except for those in the table below. To see an image showing the location of these cables, click the Chapter 6 bookmark “Bottom RF Cables, 2-Port, Option 224” in the PDF Service Guide<sup>1</sup>. Do not discard the cables because some will be reused later in the procedure.

Reference Designator	Type <sup>a</sup>	Qty	Description
W3	SR	1	A5 source 1 to W4
W9	SR	1	A5 source 1 to W10
W45	SR	1	A5 source 1 to W46
W46	SR	1	W46 to rear-panel EXT TSET DRIVE RF OUT (J6)
W47	SR	1	A23 mixer brick to EXT TSET DRIVE LO OUT (J5)
Option 029 only:			
W131	SR	1	Adapter, coax, straight, m-m, 50 ohm
W141	SR	1	A55 noise downconverter to A7 noise receiver board LO
W143	SR	1	A55 noise downconverter to A7 noise receiver board RF

a. SR = semirigid coaxial cable.

4. Remove the following gray flexible cables:
  - W64 (N5242-60025) A23 mixer brick (R1) to A20 IF multiplexer (P601)
  - W65 (N5242-60026) A23 mixer brick (R2) to A20 IF multiplexer (P801)
5. Leave the remaining gray flexible cables, the wire harnesses, and the ribbon cables connected where possible. Any that are removed should be labeled for reconnection later.

#### Step 8. Remove the A23 Mixer Brick Assembly


Remove the A23 mixer brick assembly from the PNA. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A23 and A24 Mixer Bricks” in the PDF Service Guide<sup>1</sup>.

#### Step 9. Assemble the A24 Mixer Brick and A22 Splitter

Refer to **Figure 1** in this document for this step. New parts are listed in **Table 1 on page 7** of this document.

1. Install the A24 mixer brick (5087-7829) to the mounting block by hand-starting three screws (item –; 0515-1410). Do not tighten.
2. Install two screws (item Á; 0515-0372) and torque to 9 in-lbs.
3. Go back and torque the three screws (item –; 0515-1410) to 9 in-lbs.

Figure 1 A24 Mixer Brick Assembly

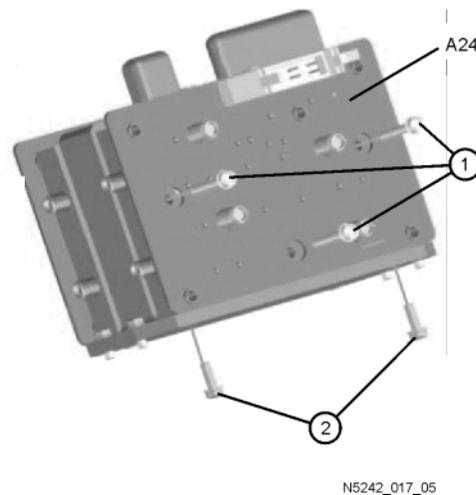

Refer to **Figure 2** in this document for the remainder of this step.


1. See **“Downloading the Online PNA Service Guide” on page 5.**

- If the PNA does not include Option 029, follow all eleven instructions shown in **Figure 2**. If the PNA does include Option 029, omit instruction 2 and the unnumbered instruction to install a splitter - it is already installed.

**NOTE**

Graphics in this document such as **Figure 2** use very brief text to instruct where to connect a cable. For example, text that reads “N5242-60018 IFMUX P201 - BRK1 B” means to connect the N5242-60018 gray flexible cable at the A20 IF MUX board connector P201 and at A23 Mixer Brick 1 connector B.

Figure 2 A23 and A24 Mixer Brick Assembly

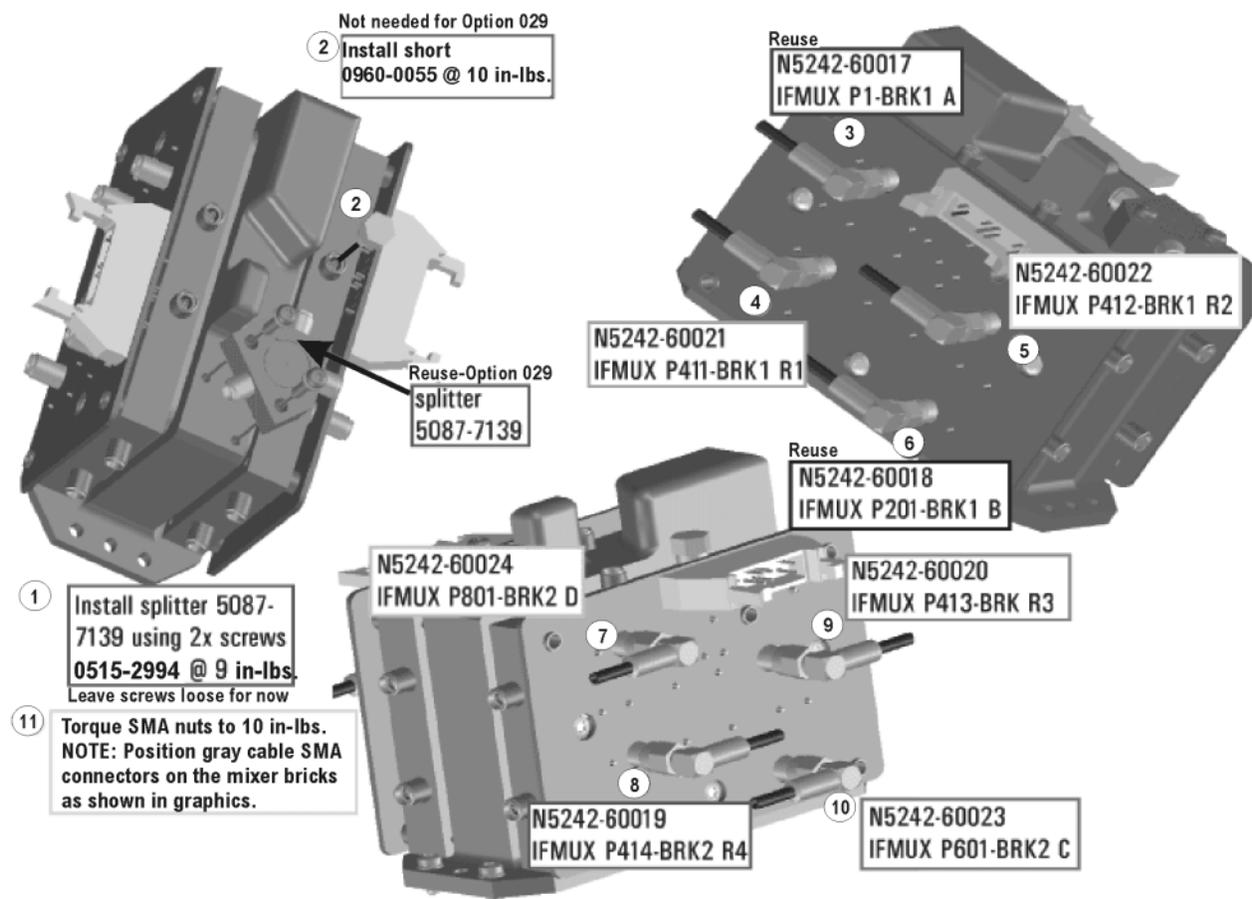


N5242\_017\_06

Step 10. Assemble the A26 and A27 Test Port Bridges

Follow the two instructions shown in **Figure 3**.

Figure 3 A26 and A27 Test Port Bridge Assembly

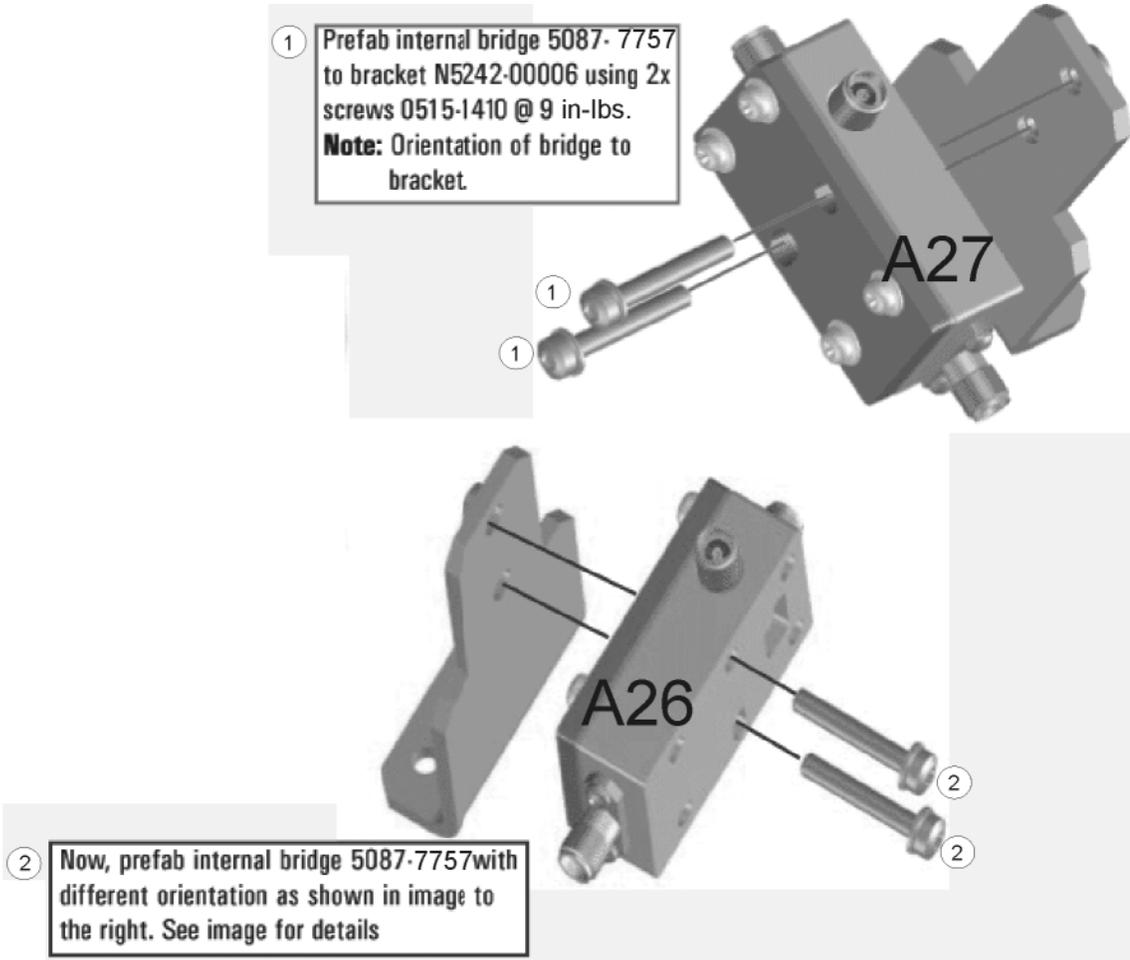


N5242\_017\_07

Installation Procedure for the Upgrade

Step 11. Install the Mixer Bricks Assembly and Test Port Bridge Assemblies

Follow the two instructions shown in **Figure 4**.

**Figure 4** A23, A24 Mixer Bricks Installation and A26, A27 Test Port Bridges Installation

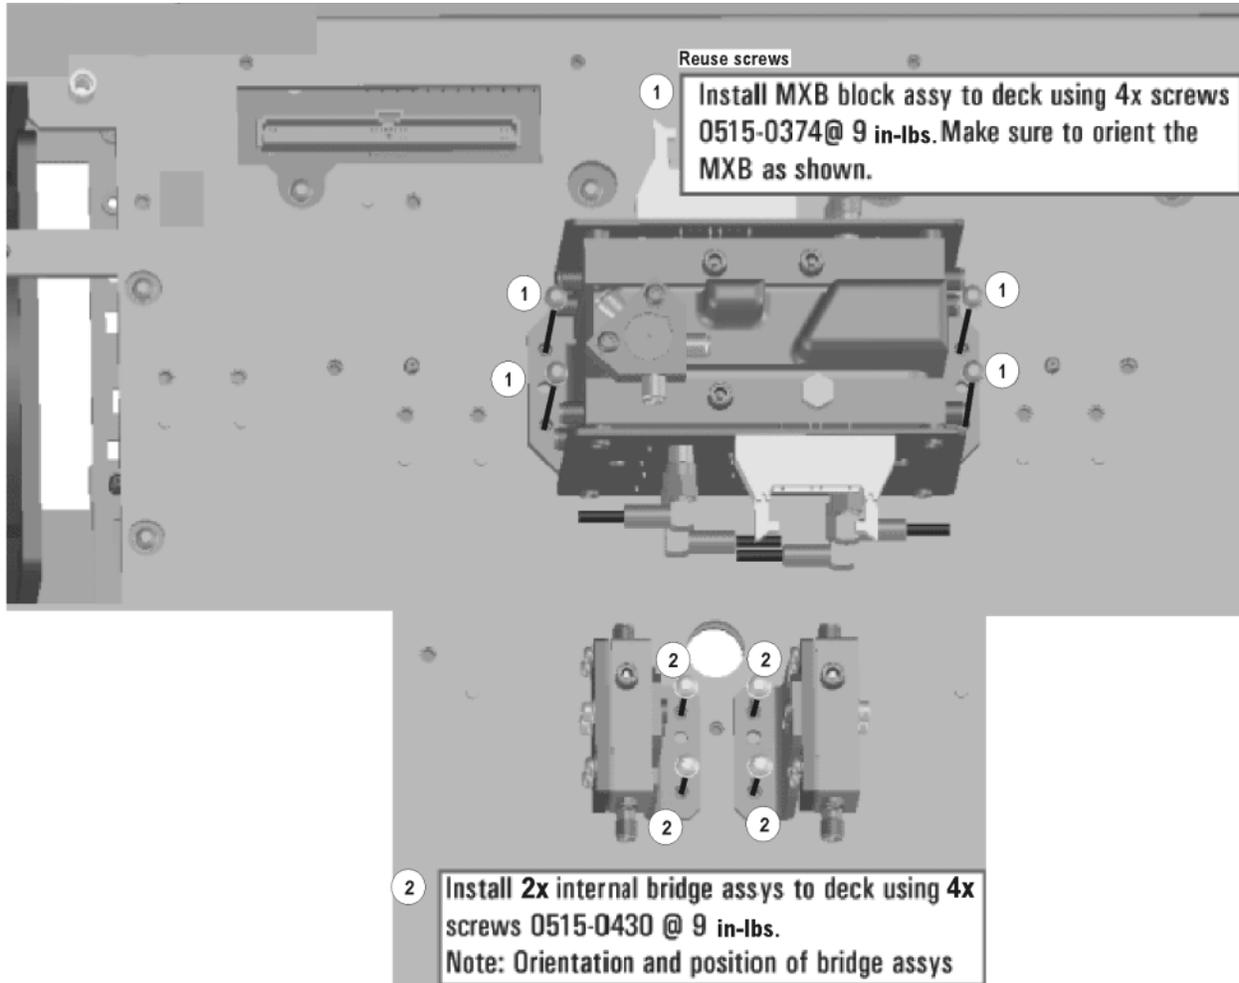


N5242\_017\_08

### Step 12. Assemble the A35, A36 Source Attenuators and the A43, A44 Receiver Attenuators

Follow the five instructions shown in **Figure 5**.

**Figure 5** A35, A36 Source Attenuators Assembly and A43, A44 Receiver Attenuators Assembly

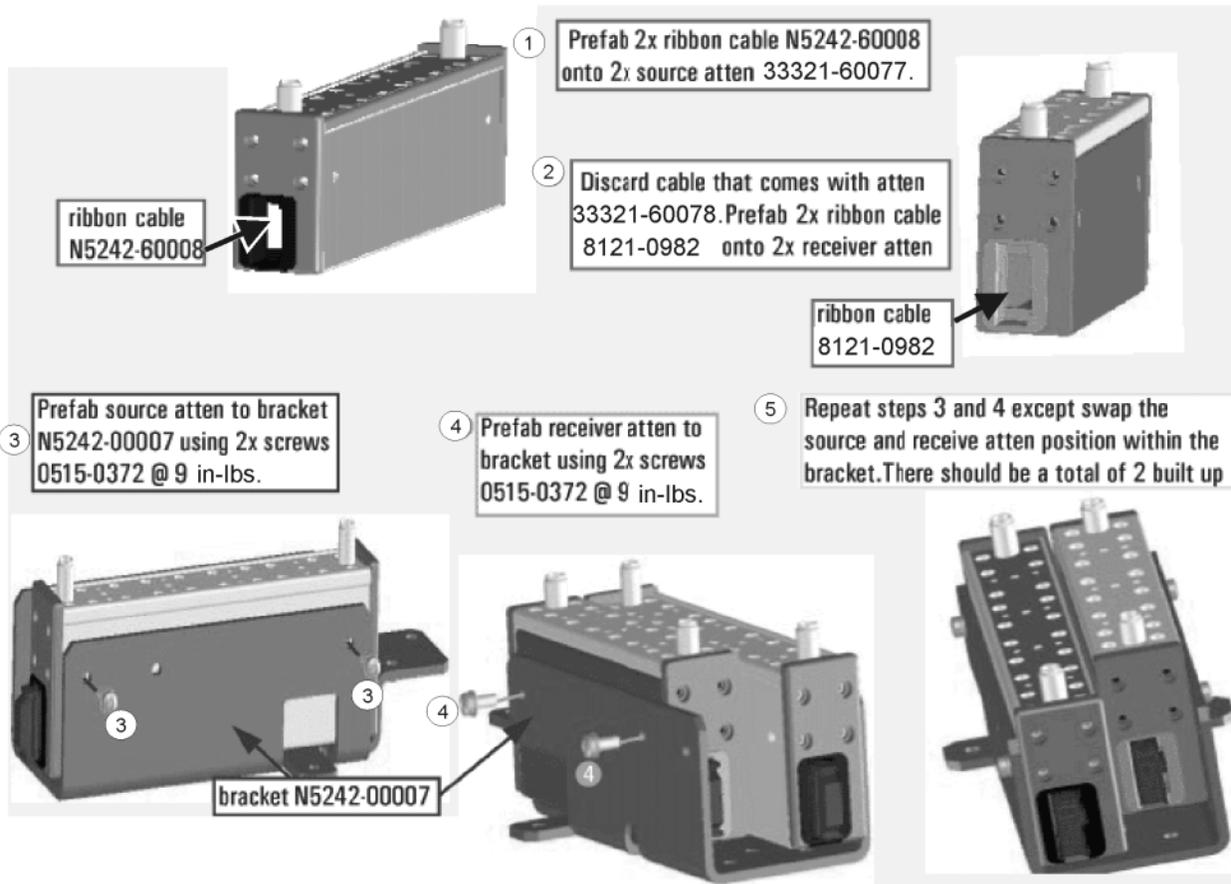

N5242\_017\_09

## Step 13. Install the Bias Tees and the Attenuator Assemblies

**CAUTION**

Installing these bias tees backwards will cause damage to the analyzer source modules.

---

If your analyzer's serial number prefix is MY/SG/US5321 and above: Follow the two instructions shown in [Figure 7](#). New parts are listed in [Table 1 on page 7](#) of this document.

If your analyzer's serial number prefix is MY/SG/US5310 and below: Remove the old A38 bias tee and A41 bias tee from the PNA. For instructions, click the Chapter 7 bookmark, "Removing and Replacing the A38 - A41 Bias Tees" in the PDF Service Guide<sup>1</sup>.


Discard the bias tees you just removed from the PNA. These old bias tees have 2.4 mm connectors and must be replaced with the new bias tees (3.5 mm connectors) included in the kit.

1. As shown in [Figure 6](#), position the new A38 bias tee and A41 bias tee on the attenuator brackets so that the port 1 and port 2 bias tees capacitors face each other.
2. Secure each bias tee to the attenuator brackets reusing two screws (item A - 0515-2994) for each. Make sure that the attenuators are oriented as shown.
3. Follow the two instructions shown in [Figure 7](#). New parts are listed in [Table 1 on page 7](#) of this document.

---

1. See ["Downloading the Online PNA Service Guide" on page 5](#).


Figure 6 Step Attenuators and Bias Tees Assembly

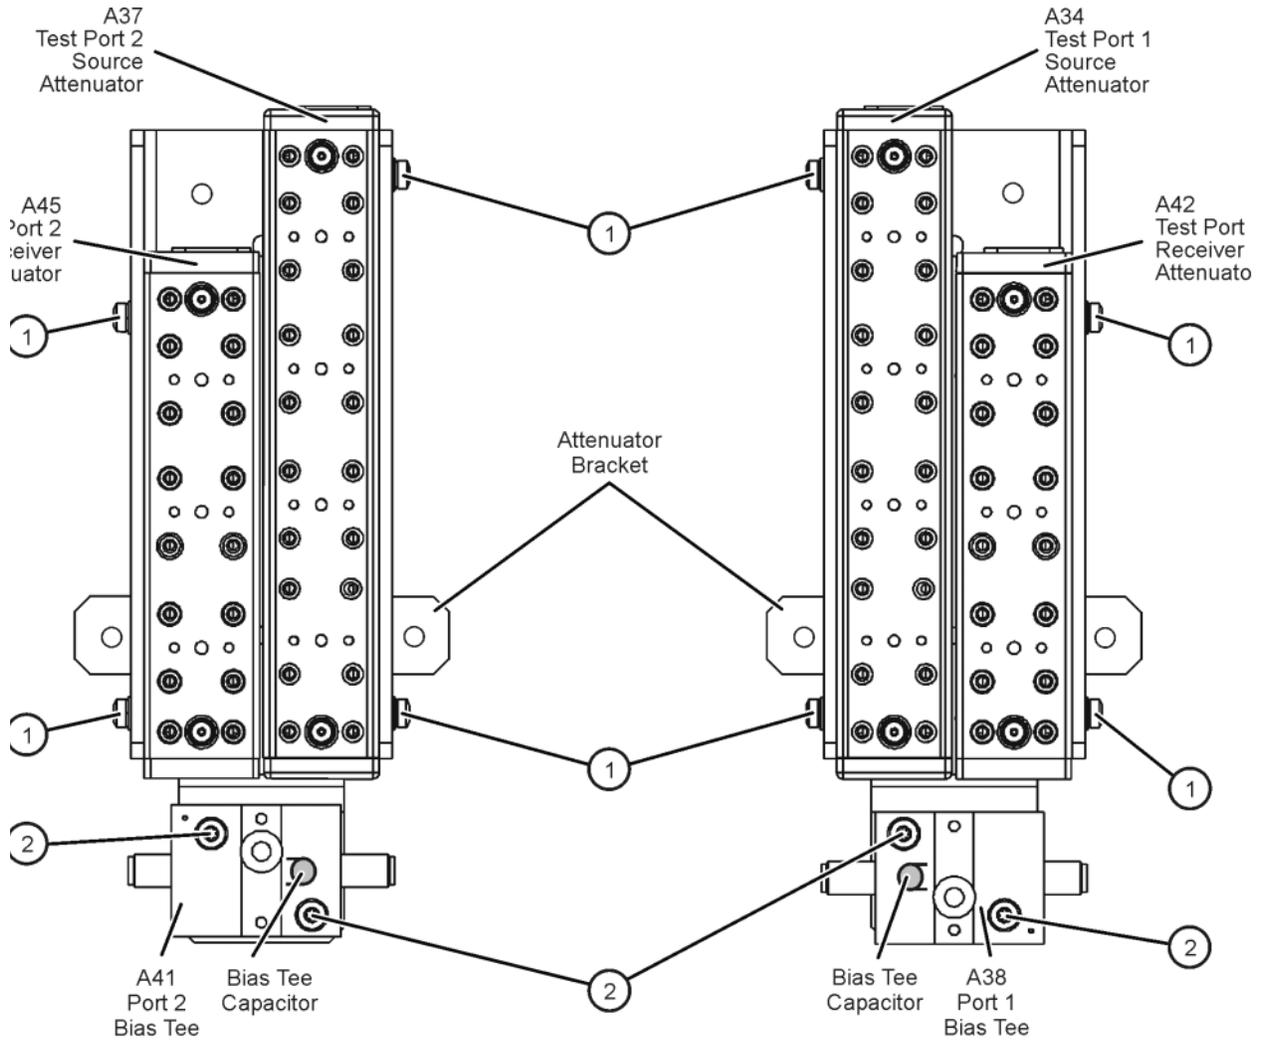

n5242\_016\_5

Figure 7 Bias Tees and Attenuators Installation

Keysight Technologies

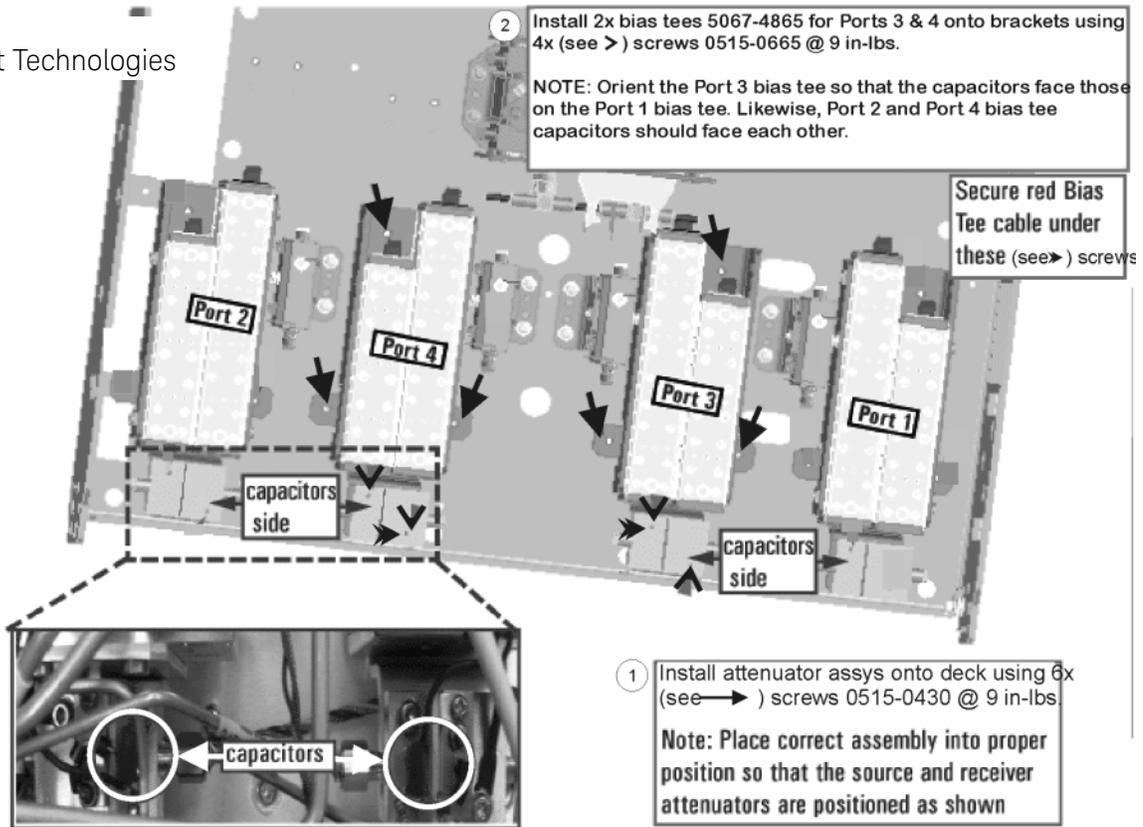


N5242\_017\_10

### Step 14. Assemble the Port 4 Source Bypass Switch Assembly

Follow the two instructions shown in **Figure 8**.

**Figure 8** Port 4 Source Bypass Switch Assembly

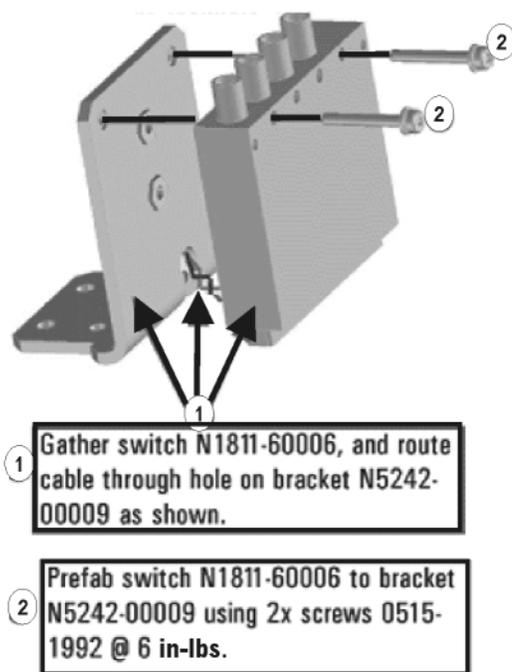


N5242\_017\_49

Installation Procedure for the Upgrade

Step 15. Install the Port 4 Source Bypass Switch Assembly

Follow the instruction shown in **Figure 9**.

**Figure 9** Port 4 Source Bypass Switch Installation

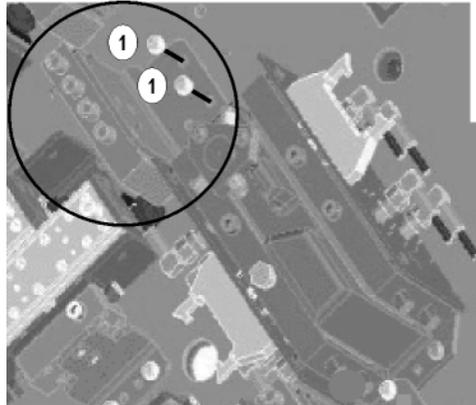


**1** Install switch assy onto deck using 2x screws  
(0515-0430) @ 9 in-lbs.

N5242\_017\_50

## Step 16. Assemble the A29 - A32 Test Port Coupler Assemblies

1. Remove the A29 test port 1 coupler and A32 test port 2 coupler from the PNA. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A29 - A32 Test Port Couplers” in the PDF Service Guide<sup>1</sup>.
2. If your analyzer’s serial number prefix is MY/SG/US5321 and above: Using pliers, remove the adhesive bumper on the A29 test port 1 coupler and on the A32 test port 2 coupler.
3. If your analyzer’s serial number prefix is MY/SG/US5310 and below: Discard the test port couplers you just removed from the PNA. These old couplers have 2.4 mm connectors and must be replaced with the new couplers (3.5 mm connectors) included in the kit.
4. Follow the two instructions shown in **Figure 10**. New parts are listed in **Table 1 on page 7** of this document.

Figure 10 A29 - A32 Test Port Coupler Assembly

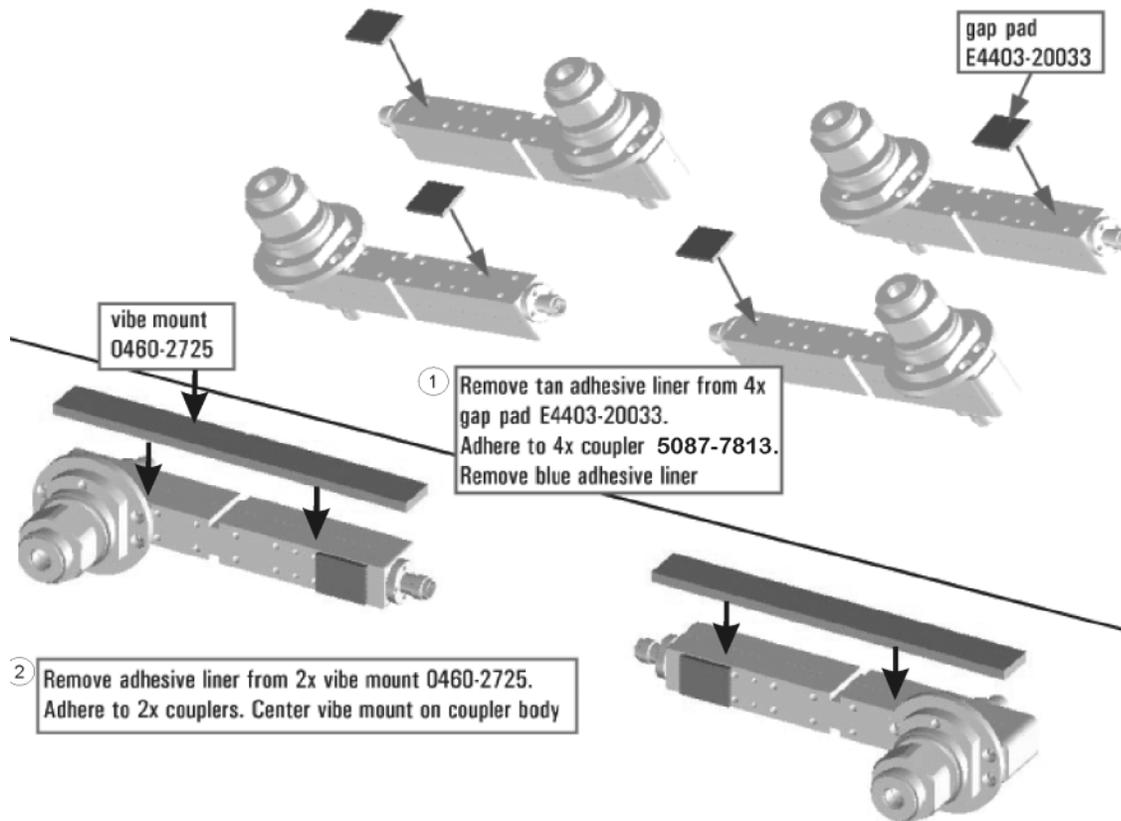


N5242\_017\_11

1. See [“Downloading the Online PNA Service Guide” on page 5](#).

## Step 17. Install the LED Boards and Test Port Coupler Assemblies to the Test Set Front Plate

1. Remove two screws from each LED board and remove the boards from the 2-port test set front plate of the PNA.
2. If your analyzer's serial number is MY/SG/US5321 and above:  
Remove the bulkhead connectors from the 2-port test set front plate of the PNA. They will be installed later in the 4-port test set front plate.
3. Remove the 2-port test set front plate from the test set deck. The bulkhead connectors may be discarded since they are not used in a 4-port configuration.
4. Follow the two instructions shown in **Figure 11**.

Figure 11 LED Board Assemblies and Test Port Coupler Assemblies Installation

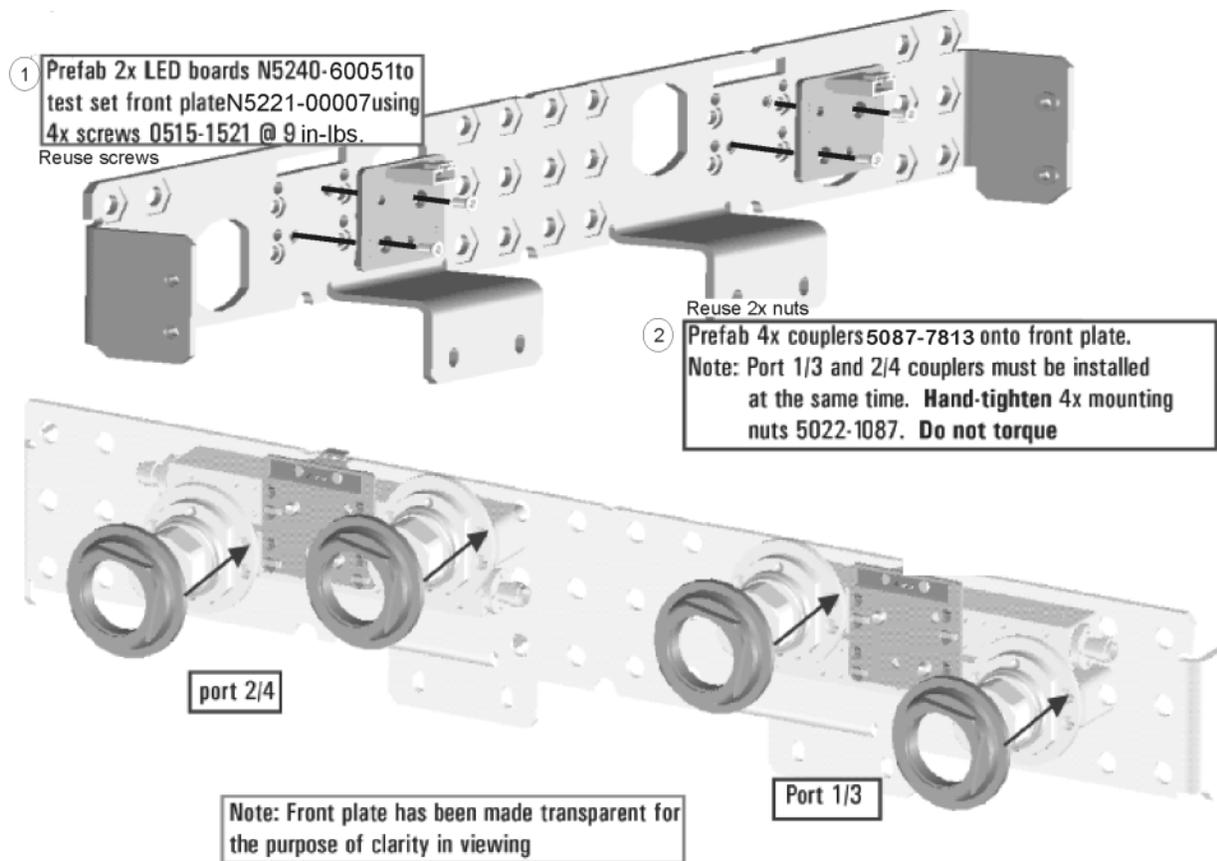


N5242\_017\_12

## Step 18. Install the Bulkhead Connectors in the Test Set Front Plate

Refer to **Figure 12** for this procedure. New parts are listed in **Table 1 on page 7**.

1. If your analyzer's serial number is MY/SG/US5321 and above:  
Locate the bulkhead connectors you removed earlier from the 2-port test set front plate of the PNA. Use these and the new bulkhead connectors included in the kit for the remainder of this step.
2. From the back side of the test set front plate, insert a bulkhead connector into a hole in the plate.
3. Install 1x washer and 1x nut. Hand tighten nut and ensure bulkhead connector hexagon nut, on the back side of test set front plate, is aligned to the test set subpanel hexagon indent.
4. Repeat previous two steps for the remaining bulkhead connectors.
5. Torque nuts, on the front side of test set front plate, to 21 in-lbs.

Figure 12 Bulkhead Connectors Installation

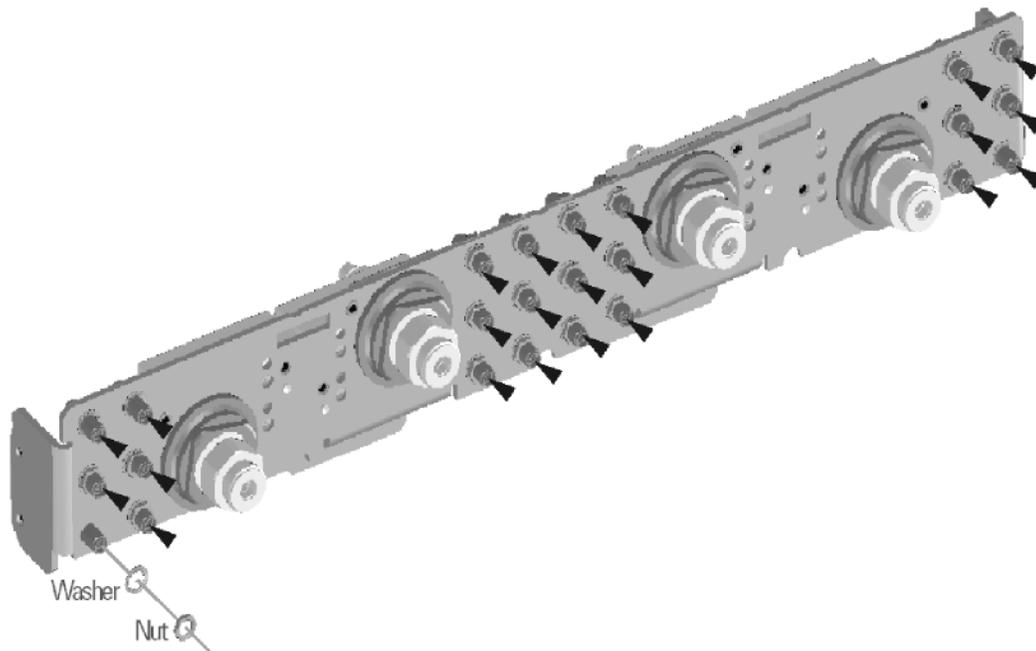


N5242\_004\_09

## Installation Procedure for the Upgrade

### Step 19. Install the Coupler Plate Assembly to the Deck

Follow the four instructions shown in **Figure 13**.

**Figure 13** Coupler Plate Assembly Installation

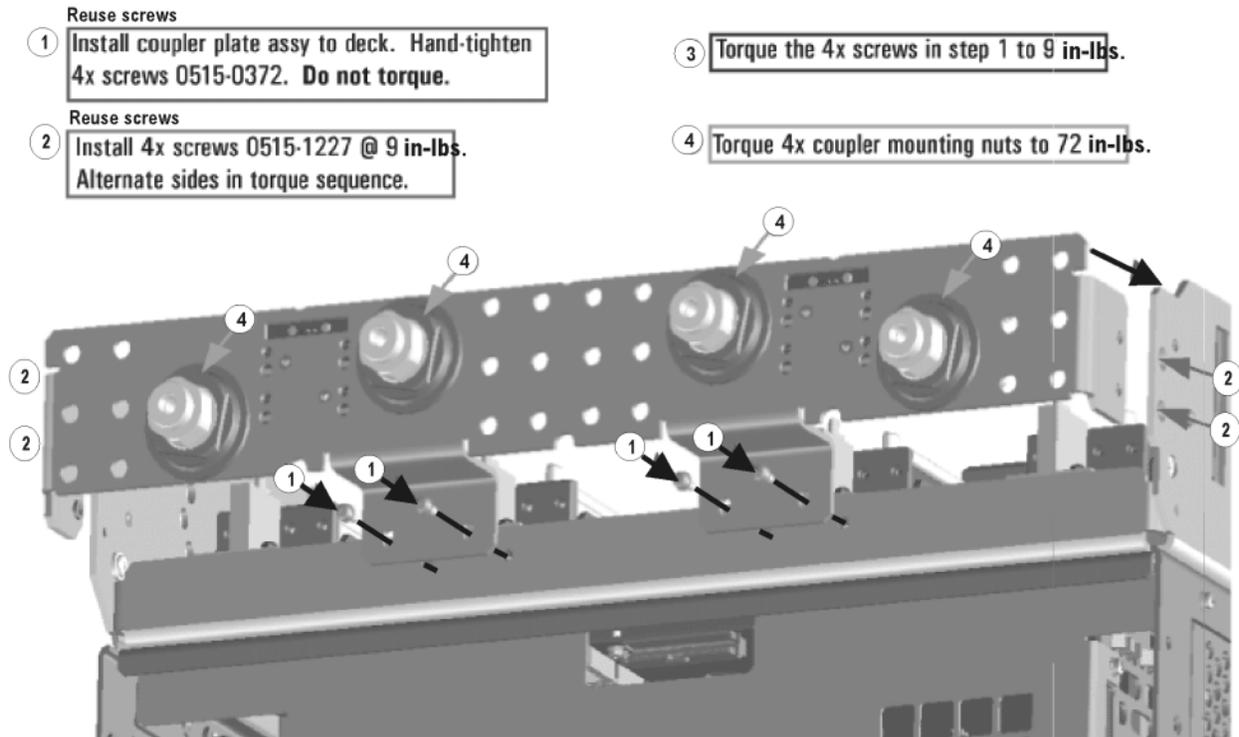

N5242\_017\_13

## Step 20. Install the Bulkhead Connectors and Jumper on the Rear Panel

**1. Remove hole plugs from the following rear panel connector openings:**

- PORT 4–SW TSET IN (J3)
- PORT 4–SW SRC OUT (J4)

New parts are listed in [Table 1 on page 7](#) for this step of the procedure.

- 2.** Where the hole plugs had been, install bulkhead connector assemblies for the two new rear panel cables. These cables will be installed later.
- 3.** Using a 5/16-in torque wrench set to 21 in-lbs, tighten the hex nuts on the bulkhead connectors.
- 4.** Install the rear panel jumper, W113, on the bulkhead connectors and torque the jumper connectors to 10 in-lbs.

## Step 21. Install the Test Set Cables

### CAUTION

Follow instructions carefully when making cable connections, especially wire harness connections. Incorrect connections can destroy components, resulting in additional customer costs.

---

### CAUTION

Be careful not to damage the center pins of the semirigid cables. Some flexing of the cables may be necessary but do not over-bend them.

---

### CAUTION

Use a 5/16-in torque wrench set to 10 in-lbs on all cable connections except the front and rear panel bulkhead connectors. On these, use a 9 mm nutsetter or open end torque wrench set to 21 in-lb.

---

### NOTE

Cables that are to be reinstalled are designated with “reuse.” Part numbers in a normal weight font are for analyzers with serial numbers MY/SG/US5310 and below. Part numbers in a bold weight font are for analyzers with serial numbers MY/SG/US5321 and above.

---

## Flexible Cables Required for Upgrading to an Option 423 PNA With or Without Option 029

Install the following flexible cables in the order listed. To see images showing the location of these cables, click either of the Chapter 6 bookmarks “Bottom RF Cables, 4-Port, Option 423...” in the PDF Service Guide<sup>1</sup>. New parts are listed in **Table 1 on page 7**.

- W56 (N5242-60019) A24 mixer brick (R4) to A20 IF multiplexer (P414)
- W57 (N5242-60020) A24 mixer brick (R3) to A20 IF multiplexer (P413)
- W52 (N5242-60021) A23 mixer brick (R1) to A20 IF multiplexer (P411)
- W53 (N5242-60022) A23 mixer brick (R2) to A20 IF multiplexer (P412)
- W58 (N5242-60023) A24 mixer brick (C) to A20 IF multiplexer (P601)
- W55 (N5242-60024) A24 mixer brick (D) to A20 IF multiplexer (P801)

## Semirigid Cables Required for Upgrading to an Option 423 PNA With Option 029

If Option 029 is not installed, proceed to **page 33**.

Install the following semirigid cables in the order listed if upgrading to a PNA Option 423 with Option 029. To see images showing the location of these cables, click the Chapter 6 bookmark “Bottom RF Cables, 4-Port, Option 423 with Option 029” in the PDF Service Guide<sup>1</sup>. New parts are listed in **Table 1 on page 7**.

- W26 (N5222-20034) A32 port 2 coupler to front-panel Port 2 CPLR ARM
- W135 (reuse) (N5242-20073 or N5242-20278) Front-panel Port 2 RCVR B IN to A45 port 2 receiver attenuator

---

1. See **“Downloading the Online PNA Service Guide” on page 5**.

- W85 (N5222-20035) Port 2 CPLR THRU to A41 port 2 bias tee
- W128 (reuse) (N5242-20134 or N5242-20303) A53 port 2 bypass switch to front-panel Port 2 SOURCE OUT
- W127 (reuse) (N5242-20116 or N5242-20292) A37 port 2 source attenuator to A53 port 2 bypass switch
- W129 (reuse) (N5242-20117 or N5242-20293) A53 port 2 bypass switch to A54 port 2 bridge
- W130 (reuse) (N5242-20133) A53 port 2 bypass switch to A54 port 2 bridge
- W86 (N5222-20013) A41 port 2 bias tee to A32 port 2 coupler
- W91 (N5222-20022) Port 4 RCVR D IN to A44 port 4 receiver attenuator
- W82 (N5222-20014) A40 port 4 bias tee to A31 port 4 coupler
- W81 (N5222-20017) Port 4 CPLR THRU to A40 port 4 bias tee
- W22 (N5222-20018) A31 port 4 coupler to front-panel Port 4 CPLR ARM
- W80 (N5222-20020) A36 port 4 source attenuator to front-panel Port 4 SOURCE OUT
- W89 (N5222-20021) Port 3 RCVR C IN to A43 port 3 receiver attenuator
- W74 (N5222-20012) A38 port 1 bias tee to A29 port 1 coupler
- W77 (N5222-20016) Port 3 CPLR THRU to A39 port 3 bias tee
- W18 (N5222-20015) A30 port 3 coupler to front-panel Port 3 CPLR ARM
- W76 (N5222-20019) A35 port 3 source attenuator to front-panel Port 3 SOURCE OUT
- W14 (N5222-20030) A29 port 1 coupler to front-panel Port 1 CPLR ARM
- W132 (reuse) (N5242-20072 or N5242-20277) Front-panel Port 1 RCVR A IN to A42 port 1 receiver attenuator
- W125 A52 port 1 noise bypass switch to A38 port 1 bias tee
- W124 (reuse) (N5242-20125 or N5242-20295) Front-panel Port 1 CPLR THRU to A52 port 1 bypass switch
- W123 (reuse) (N5242-20127 or N5242-20297) A52 port 1 bypass switch to front-panel Port 1 SOURCE OUT
- W78 (N5222-20011) A39 port 3 bias tee to A30 port 3 coupler
- W122 (reuse) (N5242-20128) A34 port 1 source attenuator to A52 port 1 bypass switch

\* Loosen 3x screws on A33 Reference Mixer Switch board, then slide the board to the rear of the instrument to connect the following two cables (N5242-20042 and N5242-20043).

- W36 (reuse) (N5242-20042 or N5222-20032) Front-panel REF 1 RCVR R1 IN to A33 reference mixer switch

## Installation Procedure for the Upgrade

- W35 (reuse) (N5242-20043 or N5222-20033) A33 reference mixer switch to front-panel REF 1 SOURCE OUT
  - \* Torque 3x Reference Mixer Switch board screws 0515-0372 to 9 in-lbs.
- W126 (reuse) (N5242-20066 or N5242-20272) A28 port 2 bridge to A37 port 2 source attenuator
- W137 (reuse) (N5242-20074 or N5242-20279) A28 port 2 bridge to front-panel REF 2 SOURCE OUT
- W110 (reuse) (N5242-20004 or N5242-20262) A49 port 2 source bypass switch to A28 port 2 bridge
  - \* Use 1/4" wrench to hold source cable connectors when tightening mating semi-rigid cables.
- W109 (reuse) (N5242-20019 or N5242-20268) W9 to A49 port 2 source bypass switch
- W79 (N5222-20001) A27 port 4 bridge to A36 port 4 source attenuator
- W106 (N5242-20261) A48 port 4 source bypass switch to A27 port 4 bridge
- W105 (N5242-20267) W7 to A48 port 4 source bypass switch
- W75 (N5222-20002) A26 port 3 bridge to A35 port 3 source attenuator
- W102 (N5242-20263) A47 port 3 source bypass switch to A26 port 3 bridge
- W17 (N5222-20023) A26 port 3 bridge to front-panel REF 3 SOURCE OUT
- W21 (N5222-20025) A27 port 4 bridge to front-panel REF 4 SOURCE OUT
- W136 (reuse) (N5242-20068 or N5242-20274) A33 reference mixer switch to A23 mixer brick (R1)
- W133 (reuse) (N5242-20069 or N5242-20275) A42 port 1 receiver attenuator to A23 mixer brick (A)
- W121 (reuse) (N5242-20067 or N5242-20273) A25 port 1 bridge to A34 port 1 source attenuator
- W90 (N5242-20306) A43 port 3 receiver attenuator to A24 mixer brick (C)
- W100 (reuse) (N5242-20008 or N5242-20265) A50 combiner to A46 port 1 source bypass switch
- W96 (reuse) (N5242-20007 or N5242-20264) A46 port 1 source bypass switch to A25 port 1 bridge
- W13 (reuse) (N5242-20011 or N5222-20005) A25 port 1 bridge to A33 reference mixer switch
- W101 (reuse) (N5242-20017 or N5242-20266) W5 to A47 port 3 source bypass switch
- W38 (N5222-20270) REF 3 RCVR R3 IN to A24 mixer brick (R3)
- W95 (reuse) (N5242-20020 or N5242-20269) W3 to A46 port 1 source bypass switch
- W43 (N5222-20007) A22 splitter to A23 mixer brick
  - \* Leave the W43 loose for now.

- W42 (N5222-20009) A21 HMA26.5 to A22 splitter
  - \* Leave the W42 loose for now.
- W44 (N5222-20008) A22 splitter to A24 mixer brick
  - \* Leave the W44 loose for now.
  - \* Tighten 2x screws on A22 splitter @ 9 in-lbs.
  - \* Tighten cable nuts on W42, W43, and W44 @10 in-lbs.
- W134 (reuse) (N5242-20070 or N5242-20276) A45 port 2 receiver attenuator to A23 mixer brick (B)
- W138 (reuse) (N5242-20075 or N5242-20280) Front-panel REF 2 RCVR R2 IN to A23 mixer brick (R2)
- W107 (N5242-20283) A48 port 4 source bypass switch to PORT 4 SW SRC OUT (J4)
- W92 (N5242-20307) A44 port 4 receiver attenuator to A24 mixer brick (D)
- W39 (N5222-20271) REF 4 RCVR R4 IN to A24 mixer brick (R4)
- W140 (N5242-20294) A24 mixer brick to A55 noise downconverter
- W112 (reuse) (N5242-20085 or N5242-20286) Rear panel PORT 2 SW TSET IN (J1) to A49 port 2 source bypass switch
- W111 (reuse) (N5242-20084 or N5242-20285) A49 port 2 source bypass switch to PORT 2 SW SRC OUT (J2)
- W108 (N5242-20284) Rear panel PORT 4 SW TSET IN (J3) to A48 port 4 source bypass switch.
- W41 (reuse) (N5242-20110 or N5222-20067) A11 13.5 GHz synthesizer to A21 HMA26.5
  - \* Route cable through deck cutout to A11 synthesizer board.
- W104 (reuse) (N5242-20080 or N5242-20281) Rear panel PORT 3 SW TSET IN (J7) to A47 port 3 src bypass switch
- W103 (reuse) (N5242-20081 or N5242-20282) A47 port 3 source bypass switch to PORT 3 SW SRC OUT (J8)
- W99 (reuse) (N5242-20088 or N5242-20289) Rear panel PORT 1 COMB ARM IN (J9) to A50 combiner
- W98 (reuse) (N5242-20087 or N5242-20288) Rear panel PORT 1 COMB THRU IN (J10) to A50 combiner
- W97 (reuse) (N5242-20086 or N5242-20287) A46 port 1 source bypass switch to PORT 1 SW SRC OUT (J1)
- W113 (E8356-20072) Rear panel jumper: SW SRC OUT (J8) to COMB ARM IN (J9)
- W2 (reuse) (N5242-20124 or N5222-20090) A13 13.5 GHz source 2 synthesizer board J1207 to A8 26.5 GHz source 2 board P1
- W30 (reuse 6) (E8356-20072 or N5222-20091) 12 front panel jumpers

## Semi-rigid Cables Required for Upgrading to an Option 423 PNA Without Option 029

Install the following semirigid cables in the order listed if upgrading to a PNA Option 423 without Option 029. To see images showing the location of these cables, click the Chapter 6 bookmark “Bottom RF Cables, 4-Port, Option 423 without Option 029” in the PDF Service Guide<sup>1</sup>. New parts are listed in **Table 1 on page 7**.

- W7 (reuse) (N5242-20092 or N5222-20063) A8 source 2 to W105
- W26 (N5222-20034) A32 port 2 coupler to front-panel Port 2 CPLR ARM
- W93 (reuse) (N5242-20047 or N5222-20037) Port 2 RCVR B IN to A45 port 2 receiver attenuator
- W85 (N5222-20035) Port 2 CPLR THRU to A41 port 2 bias tee
- W84 (reuse) (N5242-20046 or N5222-20036) A37 port 2 source attenuator to front-panel Port 2 SOURCE OUT
- W86 (N5222-20013) A41 port 2 bias tee to A32 port 2 coupler
- W91 (N5222-20022) Port 4 RCVR D IN to A44 port 4 receiver attenuator
- W82 (N5222-20014) A40 port 4 bias tee to A31 port 4 coupler
- W81 (N5222-20017) Port 4 CPLR THRU to A40 port 4 bias tee
- W22 (N5222-20018) A31 port 4 coupler to front-panel Port 4 CPLR ARM
- W80 (N5222-20020) A36 port 4 source attenuator to front-panel Port 4 SOURCE OUT
- W89 (N5222-20021) Port 3 RCVR C IN to A43 port 3 receiver attenuator
- W74 (N5222-20012) A38 port 1 bias tee to A29 port 1 coupler
- W77 (N5222-20016) Port 3 CPLR THRU to A39 port 3 bias tee
- W18 (N5222-20015) A30 port 3 coupler to front-panel Port 3 CPLR ARM
- W76 (N5222-20019) A35 port 3 source attenuator to front-panel Port 3 SOURCE OUT
- W14 (N5222-20030) A29 port 1 coupler to front-panel Port 1 CPLR ARM
- W87 (reuse) (N5242-20041 or N5222-20031) Front-panel Port 1 RCVR A IN to A42 port 1 receiver attenuator
- W73 (N5222-20029) Front-panel Port 1 CPLR THRU to A38 port 1 bias tee
- W72 (reuse) (N5242-20038 or N5222-20028) A34 port 1 source attenuator to front-panel Port 1 SOURCE OUT
- W78 (N5222-20011) A39 port 3 bias tee to A30 port 3 coupler

\* Loosen 3x screws on A33 Reference Mixer Switch board, then slide the board to the rear of the instrument to connect the following two cables (N5242-20042 and N5242-20043).

---

1. See **“Downloading the Online PNA Service Guide” on page 5**.

- W36 (reuse) (N5242-20042 or N5222-20032) Front-panel REF 1 RCVR R1 IN to A33 reference mixer switch
- W35 (reuse) (N5242-20043 or N5222-20033) A33 reference mixer switch to front-panel REF 1 SOURCE OUT
- \* Torque 3x Reference Mixer Switch board screws 0515-0372 to 9 in-lbs.
- W83 (reuse) (N5242-20002 or N5222-20001) A28 port 2 bridge to A37 port 2 source attenuator
- W25 (reuse) (N5242-20048 or N5222-20038) A28 port 2 bridge to front-panel REF 2 SOURCE OUT
- \* Secure W25 (N5242-20048) to side of deck with 1x tie wrap (1400-0249)
- W110 (reuse) (N5242-20004 or N5242-20262) A49 port 2 source bypass switch to A28 port 2 bridge
- \* Use 1/4" wrench to hold source cable connectors when tightening mating semi-rigid cables
- W109 (reuse) (N5242-20019 or N5242-20268) W9 to A49 port 2 source bypass switch
- W79 (N5242-20002) A27 port 4 bridge to A36 port 4 source attenuator
- W106 (N5242-20261) A48 port 4 source bypass switch to A27 port 4 bridge
- W105 (N5242-20267) W7 to A48 port 4 source bypass switch
- W75 (N5222-20002) A26 port 3 bridge to A35 port 3 source attenuator
- W102 (N5242-20263) A47 port 3 source bypass switch to A26 port 3 bridge
- W17 (N5222-20023) A26 port 3 bridge to front-panel REF 3 SOURCE OUT
- W21 (N5222-20025) A27 port 4 bridge to front-panel REF 4 SOURCE OUT
- W90 (N5242-20306) A43 port 3 receiver attenuator to A24 mixer brick (C)
- W37 (reuse) (N5242-20009 or N5222-20003) A33 reference mixer switch to A23 mixer brick (R1)
- \* Secure W37 (N5242-20009) to side of deck with 3x tie wrap (1400-0249)
- W88 (reuse) (N5242-20010 or N5222-20004) A42 port 1 receiver attenuator to A23 mixer brick (A)
- W71 (reuse) (N5242-20005 or N5222-20002) A25 port 1 bridge to A34 port 1 source attenuator
- W100 (reuse) (N5242-20008 or N5242-20265) A50 combiner to A46 port 1 source bypass switch
- W96 (reuse) (N5242-20007 or N5242-20264) A46 port 1 source bypass switch to A25 port 1 bridge
- W13 (reuse) (N5242-20011 or N5222-20005) A25 port 1 bridge to A33 reference mixer switch
- W101 (reuse) (N5242-20017 or N5242-20266) W5 to A47 port 3 source bypass switch
- W95 (reuse) (N5242-20020 or N5242-20269) W3 to A46 port 1 source bypass switch
- W94 (reuse) (N5242-20016 or N5222-20010) A45 port 2 receiver attenuator to A23 mixer brick (B)

## Installation Procedure for the Upgrade

- W40 (reuse) (N5242-20049 or N222-20039) Front-panel REF 2 RCVR R2 IN to A23 mixer brick (R2)
- W43 (N5222-20007) A22 splitter to A23 mixer brick
  - \* Leave the W43 loose for now.
- W44 (N5222-20008) A22 splitter to A24 mixer brick
  - \* Leave the W44 loose for now.
- W42 (N5222-20009) A21 HMA26.5 to A22 splitter
  - \* Leave the W42 loose for now.
- \* Tighten 2x screws on A22 splitter @ 9 in-lbs.
  - \* Tighten cable nuts on W42, W43, and W44 @10 in-lbs.
- W107 (N5242-20283) A48 port 4 source bypass switch to PORT 4 SW SRC OUT (J4).
- W92 (N5242-20307) A44 port 4 receiver attenuator to A24 mixer brick (D)
- W39 (N5222-20271) REF 4 RCVR R4 IN to A24 mixer brick (R4)
- W38 (N5222-20270) REF 3 RCVR R3 IN to A24 mixer brick (R3)
- W112 (reuse) (N5242-20085 or N5242-20286) Rear panel PORT 2 SW TSET IN (J1) to A49 port 2 source bypass switch
- W111 (reuse) (N5242-20084 or N5242-20285) A49 port 2 source bypass switch to PORT 2 SW SRC OUT (J2)
- W108 (N5242-20284) Rear panel PORT 4 SW TSET IN (J3) to A48 port 4 source bypass switch
- W41 (reuse) (N5242-20110 or N5222-20067) A11 13.5 GHz synthesizer to A21 HMA26.5
  - \* Route cable through deck cutout to A11 synthesizer board.
- W104 (reuse) (N5242-20080 or N5242-20281) Rear panel PORT 3 SW TSET IN (J7) to A47 port 3 source bypass switch
- W103 (reuse) (N5242-20081 or N5242-20282) A47 port 3 source bypass switch to PORT 3 SW SRC OUT (J8)
- W99 (reuse) (N5242-20088 or N5242-20289) Rear panel PORT 1 COMB ARM IN (J9) to A50 combiner
- W98 (reuse) (N5242-20087 or N5242-20288) Rear panel PORT 1 COMB THRU IN (J10) to A50 combiner
- W97 (reuse) (N5242-20086 or N5242-20287) A46 port 1 source bypass switch to PORT 1 SW SRC OUT (J1)
- W113 (N5222-20091) Rear panel jumper: SW SRC OUT (J8) to COMB ARM IN (J9)
- W2 (reuse) (N5242-20124 or N5222-20290) A13 13.5 GHz source 2 synthesizer board J1207 to A8 26.5 GHz source 2 board P1
- W60 (N5242-60013) A20 IF multiplexer (P203) to A12 SPAM (J2)
- W62 (N5242-60015) A20 IF multiplexer (P603) to A12 SPAM (J5)
- W30 (reuse 6) (E8356-20072 or N5222-20091) 12 front panel jumpers

## Step 22.Reinstall the A20 IF Multiplexer Board

For instructions, click the Chapter 7 bookmark “Removing and Replacing the A20 IF Multiplexer Board” in the PDF Service Guide<sup>1</sup>.

## Step 23.Reinstall the A19 Test Set Motherboard

### CAUTION

Follow instructions carefully when making cable connections, especially wire harness connections. Incorrect connections can destroy components, resulting in additional customer costs.

1. For instructions on reinstalling the board, click the Chapter 7 bookmark “Removing and Replacing the A19 Test Set Motherboard” in the PDF Service Guide<sup>1</sup>.
2. Install the following new ribbon cables and wire harness in the order listed. To see an image showing their locations, click the Chapter 6 bookmark “Bottom Ribbon Cables and Wire Harnesses, 4-Port, Option 423 (including Option 029)” in the PDF Service Guide<sup>1</sup>. New parts are listed in [Table 1 on page 7](#).
  - Ribbon cable, N5242-60006 from J213 to A24 mixer brick 2
  - Ribbon cable (part of bias tee assembly), port 3 bias tee to A19 test set motherboard J543
  - Ribbon cable (part of bias tee assembly), port 4 bias tee to A19 test set motherboard J544
  - Ribbon cable (8121-0982), A19 test set motherboard J206 to A43 port 3 receiver attenuator
  - Ribbon cable (8121-0982), A19 test set motherboard J207 to A44 port 4 receiver attenuator
  - Ribbon cable (N5242-60008), A19 test set motherboard J202 to A35 port 3 source attenuator
  - Ribbon cable (N5242-60008), A19 test set motherboard J203 to A36 port 4 source attenuator
  - Wire harness (part of the switch assembly), A19 test set motherboard J103 to A48 port 4 source bypass switch

## Step 24.Disassemble the 2-Port Front Panel and Assemble the 4-Port Front Panel

Before the front frame can be replaced, the items making up the back side of the front panel assembly must be removed. For instructions on removing these items, click the Chapter 7 bookmark “Removing and Replacing the A1-A3 and Other Front Panel Subassemblies” in the PDF Service Guide<sup>1</sup>. New parts are listed in [Table 1 on page 7](#).

1. In the section “Removing the A2 USB Board,” perform step 1 (the only step).
2. In the section “Removing the A1 Front Panel Interface Board and Keypad Assembly”, perform steps 1 - 5.

1. See [“Downloading the Online PNA Service Guide” on page 5](#).

3. In the section “Removing the Power Switch Board and Power Button Keypad”, perform only steps 1 and 2.
4. Remove the braided gasket from the backside edges of the 2-port front frame and install it in the 4-port front frame (N5247-20141).
5. Rebuild the front panel assembly with the new 4-port front frame (N5247-20141) by reversing the order of the instructions previously followed.

### Step 25.Reinstall the Front Panel Assembly

For instructions on reinstalling the front panel assembly, click the Chapter 7 bookmark “Removing and Replacing the Front Panel Assembly” in the PDF Service Guide<sup>1</sup>.

In addition, attach the lower front dress panel to the test set front plate using 4x screws 0515-1227.

### Step 26.Install the Front Panel Overlays

To see an image of the front panel overlay, keypad overlay, and power button overlay, click the Chapter 6 bookmark “Front Panel Assembly, Front Side, All Options” in the PDF Service Guide<sup>1</sup>. New parts are listed in [Table 1 on page 7](#).

1. Remove the protective backing from the new front panel overlay.
2. Loosely place the overlay in the recess on the front panel.
3. Placing two fingers at the middle, press the overlay firmly onto the frame while sliding your fingers in opposite directions towards the ends of the overlay. Repeat on all areas of the overlay.
4. Repeat steps 1-3 to install the keypad overlay (N5242-80005).
5. Repeat steps 1-3 to install the power button overlay (N5242-80007).
6. Repeat steps 1-3 to install the new nameplate (N5241-80001 for N5241A models or N5242-80006 for N5242A models).

### Step 27.Install the Jumper Cables

- Install twelve W30 front panel jumper cables (E8356-20072) - 6 that were removed previously and 6 new jumpers provided. To see an image of the front panel jumper cables, click the Chapter 7 bookmark “Removing and Replacing the Front Panel Assembly” in the PDF Service Guide<sup>1</sup>.
- Install new W113 rear panel jumper cable (E8356-20072) from SW SRC OUT (J4) to SW TSET IN (J3). To see an image showing the location of this rear panel jumper, click on the Chapter 6 bookmark “Rear Panel Assembly, All Options” in the PDF Service Guide<sup>1</sup>.

---

1. See [“Downloading the Online PNA Service Guide” on page 5](#).

## Step 28. Position the Cables and Wires to Prevent Pinching

On the top side of the PNA, carefully position the grey flex cables so they can't be pinched between the covers and the rails.

On the bottom side of the PNA, carefully fold or push down the ribbon cables and wires so they can't be pinched between the hardware and the outer cover. Ribbon cables and wires must never be positioned on top of hardware.

## Step 29.Reinstall the Inner Cover

For instructions, click the Chapter 7 bookmark "Removing the Covers" in the PDF Service Guide<sup>1</sup>.

## Step 30.Reinstall the Outer Cover

For instructions, click the Chapter 7 bookmark "Removing the Covers" in the PDF Service Guide<sup>1</sup>.

## Step 31.Install the Cable Guard

Push the cable guard over the new front jumper cables until its cushioning material touches the front panel of the PNA.

## Step 32.Remove Option 224 and Option 219 Licenses

### Procedure Requirements

- The analyzer must be powered up and operating to perform this procedure.
- The Network Analyzer program must be running.
- A keyboard and mouse must be connected to the network analyzer.

### Option 224 and Option 219 License Removal Procedure

1. To start the option enable utility, press UTILITY **System**, then **Service**, then **Option Enable**. An option enable dialog box will appear.
2. Click the arrow in the Select Desired Option box. A list of available options will appear.
3. In the Select Desired Option list, click 224.
4. Click Remove.
5. Click OK to confirm that you want to remove the license for the selected option.
6. Click No in answer to the displayed question in the Restart Analyzer? box.
7. Click the arrow in the Select Desired Option box. A list of available options will appear.
8. In the Select Desired Option list, click 219.
9. Click Remove.
10. Click OK to confirm that you want to remove the license for the selected option.

**11. Click Yes in answer to the displayed question in the Restart Analyzer? box.**

### Step 33. Enable Options P04, 419, and 423

#### Procedure Requirements

- The analyzer must be powered up and operating to perform this procedure.
- The Network Analyzer program must be running.
- A keyboard and mouse must be connected to the network analyzer.

#### Option Enable Procedure

1. To start the option enable utility, press UTILITY **System**, then **Service**, then **Option Enable**. An option enable dialog box will appear.
2. Click the arrow in the Select Desired Option box. A list of available options will appear.
3. In the Select Desired Option list, click P04 - 4-Ports.
4. Using the keyboard, enter the license key in the box provided. The license key is printed on the license message you received from Keysight. Enter this key exactly as it is printed on the message.
5. Click Enable.
6. Click Yes in answer to the displayed question in the Restart Analyzer? box.
7. Repeat steps 3-6 to enable Option 419, clicking 419 - Src/Rcvr Atten & Bias Ts 4-Port in step 3.
8. Repeat steps 3-6 to enable Option 423, clicking 423 - Combiner & Switches in step 3.
9. When the installation is complete, click Exit.

#### Option Verification Procedure

Once the analyzer has restarted and the Network Analyzer program is again running:

1. On the analyzer's Help menu, click About Network Analyzer.
2. Verify that "P04," "419," and "423" are listed, but "224" and "219" are not listed after "Options:" in the display. Click OK.

#### NOTE

If the options have not been enabled or if the option 224 and option 219 licenses have not been removed, perform the prior steps again. If the options are still not correct, contact Keysight Technologies. Refer to ["Getting Assistance from Keysight" on page 3](#).

## Step 34. Perform Post-Upgrade Adjustments and Calibration

### Adjustments

The following adjustments must be made due to the hardware changes of the analyzer.

- source adjustment
- IF gain adjustment
- receiver characterization
- receiver adjustment
- IF Response Adjustment (Option 090 Only)
- Noise Adjustment (Option 029 Only)

These adjustments are described in the PNA Service Guide and in the PNA on-line HELP. A list of equipment required to perform these adjustments is also found in the service guide.

After the specified adjustments have been performed, the analyzer should operate and phase lock over its entire frequency range.

### Operator's Check

Perform the Operator's Check to test the basic functionality of the analyzer. For instructions, click the Chapter 3 bookmark "Tests and Adjustments" in the PDF Service Guide<sup>1</sup>.

If you experience difficulty with the basic functioning of the analyzer, contact Keysight. Refer to **"Contacting Keysight" on page 3**.

### Calibration

Although the analyzer functions, its performance relative to its specifications has not been verified. It is recommended that a full instrument calibration be performed using the analyzer's internal performance test software. To view information on the performance test software, click the Chapter 3 bookmark "Tests and Adjustments" in the PDF Service Guide<sup>1</sup>.

## Step 35. Prepare the PNA for the User

- 1. If necessary, reinstall front jumper cables.**
- 2. Install the cable guards, pushing them over the front jumper cables until the cushioning material touches the front panel of the PNA.**
- 3. Install the dust caps on the test ports.**
- 4. Clean the analyzer, as needed, using a damp cloth.**

---

1. See **"Downloading the Online PNA Service Guide" on page 5**.



This information is subject to change without notice.

© Keysight Technologies 2009-2020

Edition 1, July 2020

N5242-90017

[www.keysight.com](http://www.keysight.com)