


Installation Note

**Agilent Technologies 8960 Wireless Communication Test Set
DSP Upgrade 3
Kit Part Number: E5515CU-607**

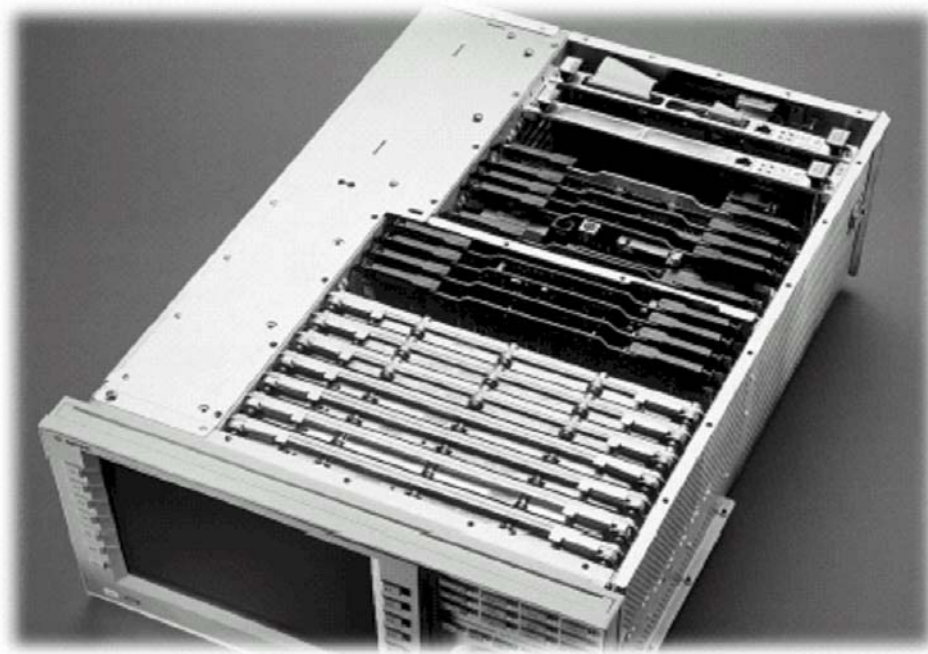

Notice

The information contained in this document is subject to change without notice.

Agilent Technologies makes no warranty of any kind with regard to this material, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Agilent Technologies shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.



E5515-90366



Agilent Technologies

Agilent Technologies 8960 Wireless Communication Test Set

DSP Upgrade 3

Kit Part Number: E5515CU-607

Product Affected:	E5515C
Associated Options:	Options 508, 515, 613
Replaces Board:	E5515-61262 or below
Applications Supported:	See Appendix 1
To Be Performed By:	(X) Agilent Technologies Service Center (X) Personnel Qualified by Agilent Technologies
Estimated Installation Time:	1.0 hours
Estimated Verification Time:	0.5 hours

Introduction

This kit provides the instructions for installing Option 607 DSP Processor into the E5515C Wireless Test Set. This is one of several upgrades that are required to enable the latest E5515C high speed capabilities and features.

NOTE: This upgrade kit requires the installation of the most current revisions of application software that is compatible with this HW. Failure to install compatible applications may result in boot-up failures.

NOTE: It is assumed that the E5515 is fully operational prior to a HW upgrade. Installing HW upgrades in a non-operational instrument may complicate a successful installation and verification process.

If this kit is one of several HW options being installed, the following installation sequence is recommended. The actual installation will depend on the specific HW option kit(s) being installed:

- 1) Bottom section RF modules (RFIO, Attenuators)
- 2) Top section RF modules (Vector, Synth Doubler, BBG)
- 3) Digital modules (ADC, DSP, RTI, LSS, Protocol)
- 4) Rear section modules (HDD, Host Processor, Rear Panel)

Installation Kit Parts List

Item	Qty	Description
1	1	DSP Module Assembly
2	1	Installation Note (this document)

Tools Required

T-20 drivers

Safety Considerations

WARNING Before you disassemble the test set, turn the power switch off and unplug

the power cord. Failure to unplug the test set can result in personal injury.

CAUTION Electrostatic discharge (ESD) can damage or destroy electronic components. All work on electronic assemblies should be performed at a static-safe workstation.

Install Compatible Versions of Existing Applications:

Upgrade all existing compatible applications to the latest revision.

HW compatibility info is available at: www.agilent.com/find/e5515releasenotes

Test Application downloads are available at: www.agilent.com/find/8960TA

Lab Application downloads are available at: www.agilent.com/find/8960upgrades

1. Make active one of the new application versions. This will ensure the instrument will boot to a compatible application after the HW installation.
2. Follow the Firmware installation instructions that come with the Applications

Remove Non-compatible Applications:

1. Remove all non-compatible applications from the test set. Removing older application revisions prevents improper operation of the test set. The test set must be connected to a PC using a cross-over cable via the test set's LAN port.
 - a. Run the Agilent 8960 File Utility
 - b. Select the Direct Connection (Single test set) button.
 - c. Select the Test Application tab.
 - d. Highlight the old revision(s) of application(s) and select the Delete From test set button. All licenses should remain on the instrument. Removing an application does not remove the license for that application.

HW Disassembly:

Remove outer cover and top cover for the 8960

1. Remove handles and rear bumpers.
2. Remove the screws on the rear panel holding outer cover.
3. Slide outer cover off.
4. Remove the 26 screws holding the top cover on and remove the cover.

Remove the DSP Assembly

1. Carefully remove the DSP Module Assembly. Refer to the *Replaceable Parts List (E5515A/B/C/T)* in the *Troubleshooting and Repair* section of the 8960 Assembly Level Repair area at: www.agilent.com/find/8960toolbox for board location.

HW Assembly:

Install Board

1. Install the DSP Assembly into the module slot 14. Make sure the DSP module is fully inserted into the motherboard connectors.

Replace covers:

1. Replace the top cover and secure it with the 26 screws.
2. Slide the outer shroud (cover) on.
3. Replace the screw on the rear
4. Attach the rear bumpers and handles.

Verification Test after all HW Upgrades are Installed

1. Turn on the E5515. The unit should boot to the new Application.
2. Check for boot up and/or error messages. If any error message are displayed, re-check installation process for errors.
3. After warming up the instrument for at least 30 minutes, perform the user calibrations.

Calibration Procedure for Instruments with Option 003

Application Or Format	Calibration Interval = 1 year				Calibration Interval = 1 month		
	IQ Calibrations (See Note 1)	Burst Mod Offset 1 Calibration	Thermal Power Null Adjust	Digital Average Power Calibration	Spectrum Monitor Calibration	Channel Power Calibration	Calibrate Measurements
Cdma2000/IS-95/AMPS	Step 1 Perform IQ1 and IQ2 once from one of these applications or formats	Step 2 Perform once from one of these applications or formats	Step 3 Perform once from one of these applications or formats	Step 4A Perform once from one of these applications or formats	Step 5 Perform once from one of these applications or formats	Covered by Step 5 (See Note 2)	
1xEV-DO				Step 4B Cycle Power			
W-CDMA					Step 6 Perform once from this application		Covered by Step 6 (See Note 2)
GSM/GPRS/EGPRS					Step 7 Perform once from one of these applications or formats		
AMPS/136							

Note 1 – Calibrate Second IQ Modulator only applies to instruments with Option 002: RF Source 2.
Note 2 – You do not need to run this calibration if Spectrum Monitor calibration is run first.

Calibration Procedure for Instruments without Option 003

Application or Format	Calibration Interval = 1 year	Calibration Interval = 1 month
	IQ Calibrations (See Note 1)	Spectrum Monitor Calibration
GSM/GPRS/EGPRS	Step 1 Perform IQ1 and IQ2 once from one of these applications or formats	Step 2 Perform once from one of these applications or formats
AMPS/136		

Note 1 – Calibrate Second IQ Modulator only applies to instruments with Option 002: RF Source 2

4. If additional verification testing is desired, tools are available from Agilent to verify the functional and parametric performance of the instrument.
 - a. Self Test software – requires no external test equipment. Good for functional verification if traceable parametric measurements are not required. For more information, see <http://wireless.marketing.agilent.com/docloader.asp?did=12376>

- b. Test Set Verify software and system – requires external test equipment. Best for traceable functional verification parametric measurements. For more information, see <http://www.spk.agilent.com/~yerxa/Upgrades/index.htm>

Questions and concerns contact Agilent Technologies Support:

Phone: (800) 827-3848 (U.S. & Canada)

Web: www.agilent.com/find/8960support

Appendix 1

NOTE: For the most up-to-date summary of compatible E5515 applications, access the E5515 Mainframe Revision website at: www.agilent.com/find/e5515releasenotes

All existing Applications must be upgraded to the latest revision and switched to one of the new revisions. All non-compatible Applications must be upgraded to work with the new boards that are included in this upgrade kit. Follow the Firmware installation instruction that come with the Applications.

Summary of Supported Applications		
E1961A	AMPS/136	A.12.00 or greater
E1962B	CDMA 2000 TA	B.14.00 or greater
E1963A	W-CDMA TA	A.13.00 or greater
E1966A	1xEV-DO TA	A.09.00 or greater
E1968A	GSM/GPRS/EGPRS TA	A.09.00 or greater
E1976A	1xEV-DO FTM TA	A.03.00 or greater
E1987A	GSM/GPRS/W-CDMA Fast Switch TA	A.08.00 or greater
E6590A	GSM/GPRS RF Modem -- Anite	B.05.00 or greater
E6701F	GSM/GPRS Lab App F	F.01.00 or greater
E6702B	CDMA 2000 Lab App B	B.07.00 or greater
E6703E	WCDMA/HSPA Lab App E	E.01.00 or greater
E6706B	1xEV-DO Lab App	B.01.00 or greater
E6785E	GSM/GPRS_W-CDMA Lab App E	E.01.00 or greater
Applications Not Compatible		
E1960A	GSM	NOT SUPPORTED
E1962A	CDMA 2000 TA	NOT SUPPORTED
E1964A	GPRS	NOT SUPPORTED
E1985A/B/C	GSM/GPRS_AMPS/136_W-CDMA	NOT SUPPORTED
E1985E	CDMA2000_1xEV-DO	NOT SUPPORTED
E6701A/B/C/D/E	GSM/GPRS Lab App B/C/D/E	NOT SUPPORTED
E6701T/U	GSM/GPRS LA – High Data Rate	NOT SUPPORTED
E6702A	CDMA 2000 Lab App A	NOT SUPPORTED
E6703A/B/C/D	W-CDMA Lab App	NOT SUPPORTED
E6703T/U	WCDMA/HPPA LA – High Data Rate	NOT SUPPORTED
E6706A	1xEV-DO Lab App	NOT SUPPORTED
E6785A/B/C/D	GSM/GPRS_W-CDMA Lab App	NOT SUPPORTED
E6785T/U	Fast Switch LA – High Data Rate	NOT SUPPORTED

Table 1