

Keysight Technologies

N4916B De-emphasis Signal Converter

Data Sheet
Version 1.11



Accurately characterize your multi-gigabit serial interfaces with the 4-tap de-emphasis signal converter N4916B with optional clock multiplier



Introduction

Accurately characterize your multi-gigabit serial interfaces with the 4-tap de-emphasis signal converter N4916B with optional clock multiplier

Key features:

Generates 4-tap de-emphasis with variable de-emphasis levels up to 12.0 dB

- Supports data rates from 660 Mb/s to 14.2 Gb/s
- Tolerates non-balanced patterns
- Transparent to jitter
- Flexible usage as front-end for J-BERT N4903B, ParBERT 81250A or other pattern generators
- Optional clock multiplier (Option 001)
- Small size
- Programmable via J-BERT N4903B or stand-alone

Keysight N4916B Applications

The de-emphasis technique is used in many high-speed serial bus interfaces to compensate for signal distortions caused by the transmission of multi-gigabit electrical signals over PC board traces. With data rates moving beyond 5 Gb/s the simple 2-tap de-emphasis is more and more replaced by 3- or 4-tap de-emphasis techniques, i.e. for front-side buses such as QPI, PCI Express 3.0 or 12G SAS interfaces, or 10GBASE KR backplanes. The Keysight Technologies, Inc. N4916B de-emphasis signal converter enables R&D and test engineers to accurately emulate transmitter de-emphasis with adjustable 4-tap de-emphasis levels, while being transparent to jitter even on non-balanced pattern streams. It can also be used to compensate for distortions caused by cables, fixtures or testboards in the test set up.

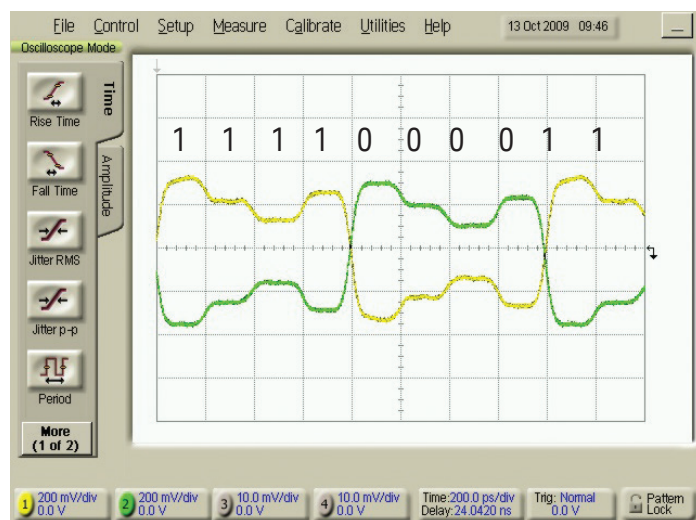


Figure 1. Differential signal with variable de-emphasis on 1 pre-cursor and 2 post-cursors generated by N4916B

The de-emphasis technique is used in many popular gigabit serial bus interfaces operating at data rates above 1 Gb/s, i.e. PCI Express®, USB3, SATA, 10GBASE-KR, 40GBASE-KR4, QPI, memory buses or Infiniband links.

Analyze error, jitter or eye performance of devices using half-rate clocks

Half-rate clocks are used in some of the highest performance serial bus interfaces, such as front-side buses QPI or memory buses.

By using the N4916B's clock multiplier (Option 001), an external clock is provided, to use the analyzer of J-BERT N4903B can be used to accurately characterize the error, eye, jitter performance without using a CDR.

Keysight N4916B Applications

Emulating transmitter de-emphasis

The de-emphasis signal converter N4916B allows emulating a transmitter by varying the de-emphasis in a wide range and for each of the three cursors individually. The N4916B is transparent to jitter on the data and clock signals from the pattern generator. The N4916B outputs are DC coupled, so that even unbalanced pattern streams can be generated without DC drifts.

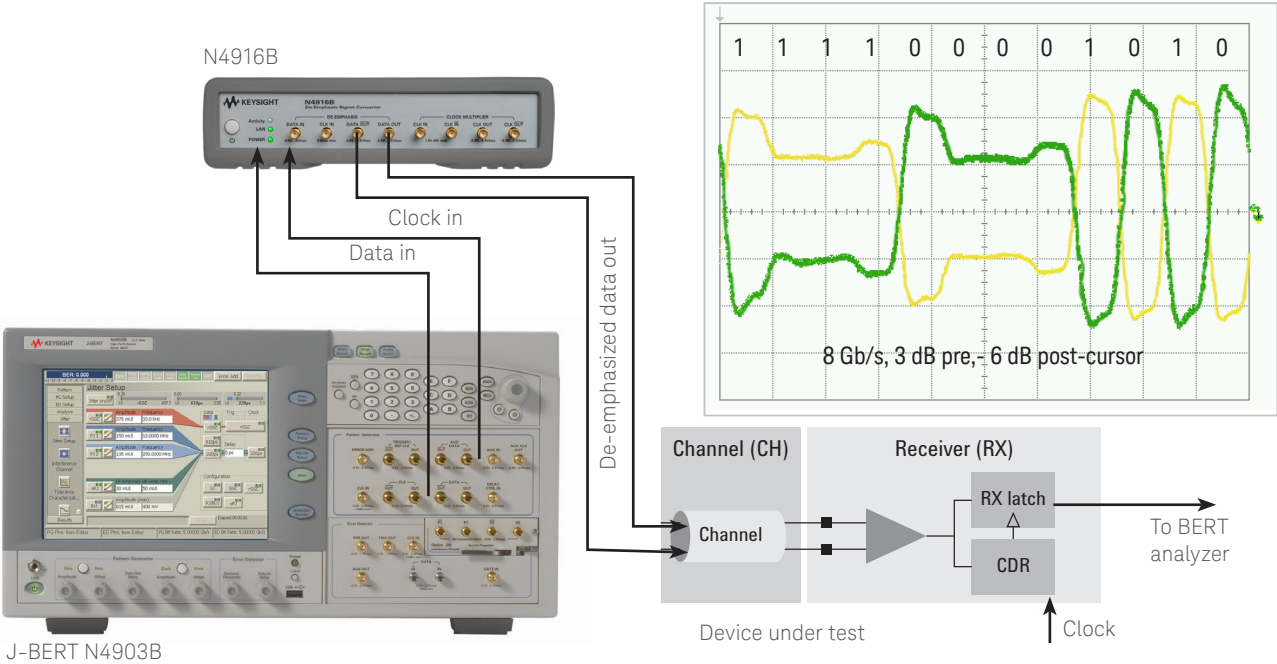


Figure 2. Generating a de-emphasis signal with N4916B and J-BERT N4903B


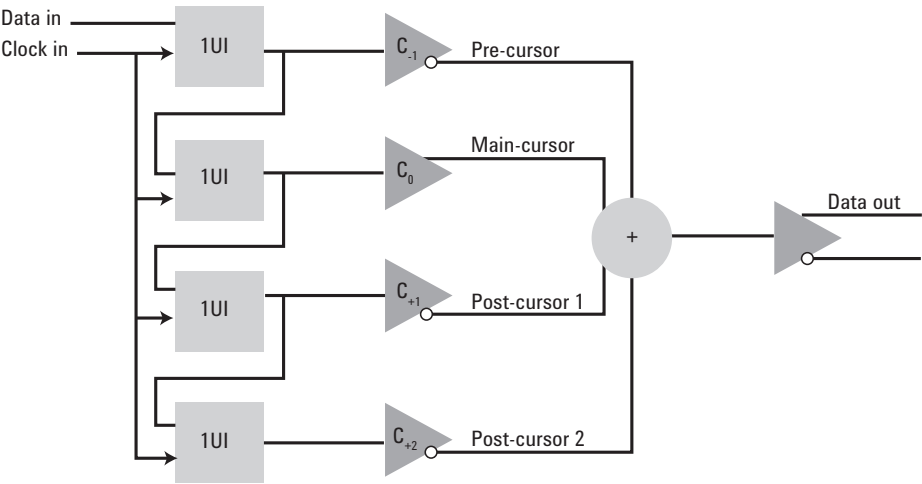


Figure 3. Simplified block diagram of N4916B showing four-tap FIR (finite impulse response) circuit


Keysight N4916B Applications

De-embedding signal degradations


The N4916B can also be used to compensate for some of the signal degradations caused by the test set up; e.g. cables, fixtures, test boards. This is helpful to optimize the jitter budget needed for accurate receiver tolerance characterization.

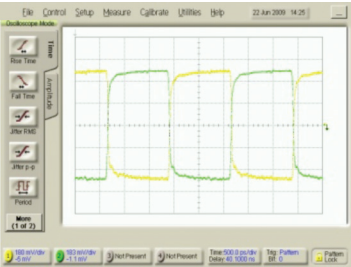


No TX de-emphasis

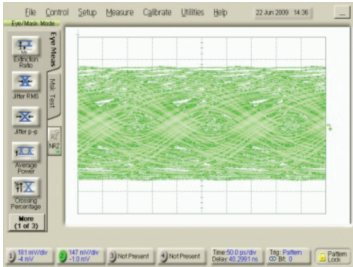

Closed eye at receiver input

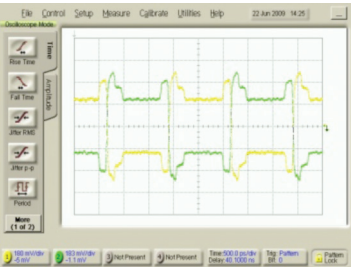

With TX de-emphasis

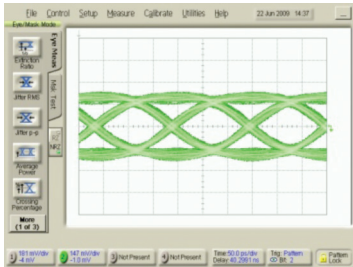

Open eye at receiver input

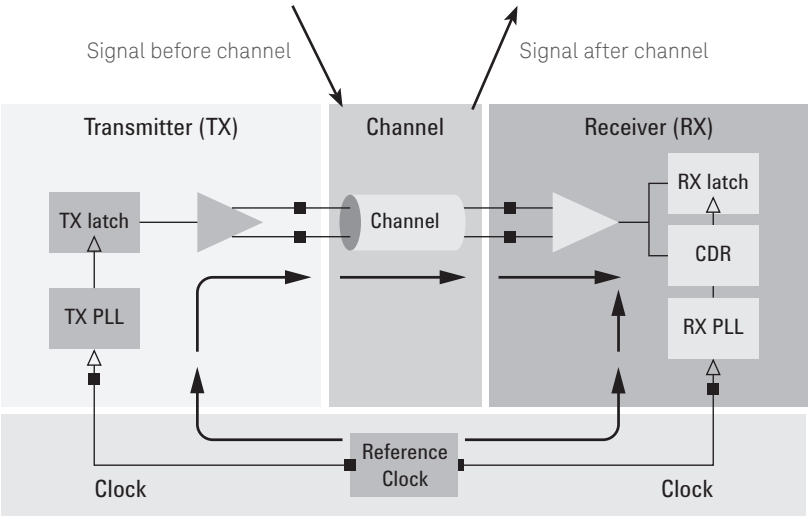



Figure 4. De-emphasis helps to compensate for the signal degradations caused by the channel. Also some of the signal degradations caused by cables, fixtures or test boards in the test setup can be compensated for using de-emphasis.

Keysight N4916B Applications

Analyze BER and eye performance of half-rate clocked devices

The clock multiplier option enables BER measurements using the forwarded half-rate clock to be used as sampling clock for J-BERT N4903B.

Device under test



Full-rate data to BERT analyzer

Half-rate clock in

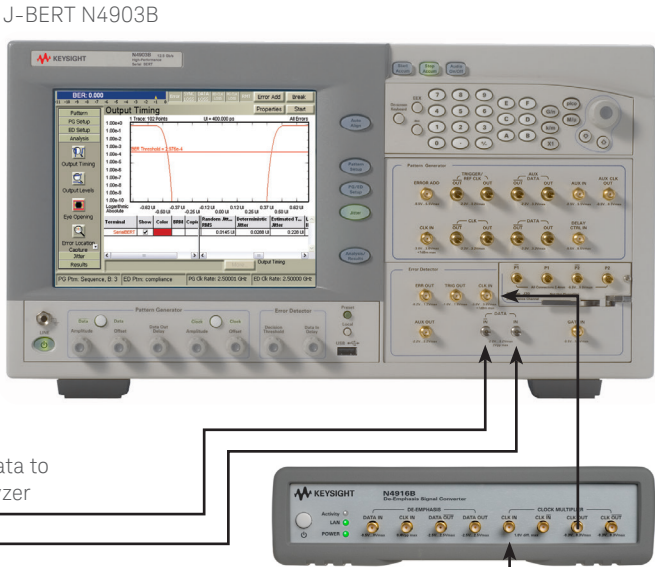


Figure 5. Analyzing TJ, eye, or error performance of devices using half-rate clocks with J-BERT N4903B analyzer and external clock generated by the N4916B clock multiplier option

Control and programming

The N4916B can be controlled via USB interface from the J-BERT N4903B user interface or from a stand-alone user interface. Programming examples are provided.

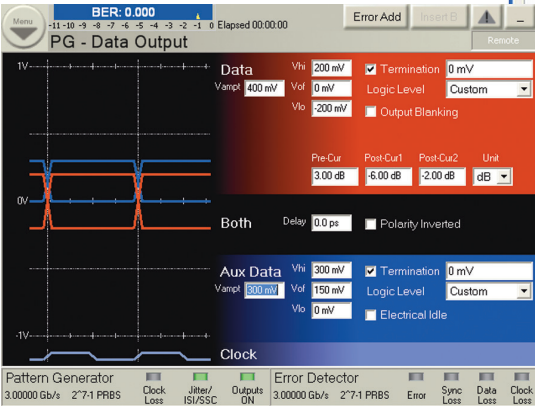


Figure 6. Convenient control of de-emphasis parameters via the GUI of J-BERT N4903B

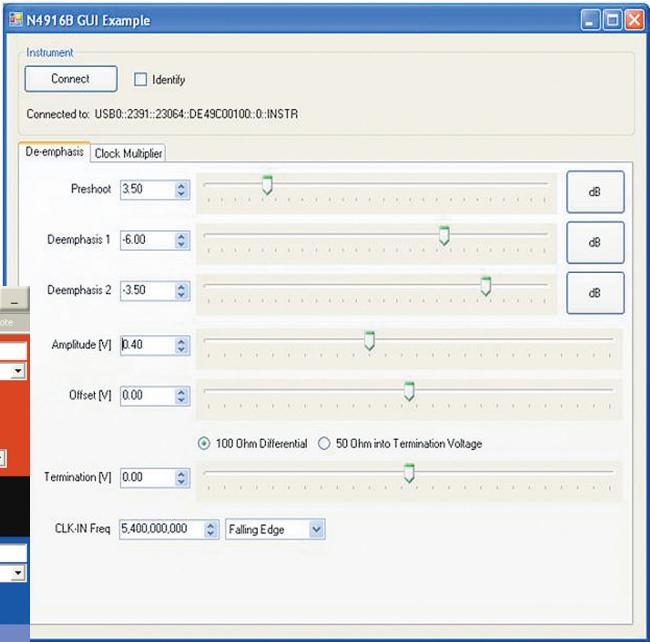


Figure 7. The N4916B can be controlled from a PC program, when operating as front-end for ParBERT 81250A or J-BERT N4903A or other pattern generators.

Keysight N4916B Specifications

| De-emphasis signal converter | |
|------------------------------|---|
| Data rate | 660 Mb/s to 14.2 Gb/s |
| Output format | NRZ |
| Pre-cursor | 0 to +12.0 dB/0.1 dB resolution ² |
| Post-cursor 1 | 0 to -12.0 dB/0.1 dB resolution ² |
| Post-cursor 2 | 0 to -8.0 dB/0.1 dB resolution ² |
| Cursor accuracy | ± 1.0 dB typical at PCI Express 3.0 pre-sets for 8 Gb/s |
| Clock input, data input | 50 Ω single ended, DC coupled |
| De-emphasis output | 50 Ω differential, DC coupled. Terminate unused output. |
| Output amplitude | 100 mV to 800 mV single ended, 200 mV to 1600 mV differential |
| Output voltage window | ± 2 V |
| Coupling | DC, accepts unbalanced patterns |
| External termination voltage | ± 2 V |
| Output transition times | < 30 ps typical (20% - 80%) |
| Jitter added | < 300 fs rms typical (0101 pattern) |
| Jitter transfer | Transparent to clock jitter. Data and clock must carry the same amount of jitter and need to be in phase ¹ |
| Delay added | 1.5 UI + 920 ps typical (including input and output adapters and ideal clocking at 0.5 UI) |
| Input voltage data input | 1.26 Vpp, offset -0.79 V |
| Input voltage clock input | 0.3 Vpp, offset 0 V |
| Connectors | SMA female |

1.

We recommend use of J-BERT N4903B's Aux clock output to ensure these prerequisites are met. When using N4916B together with J-BERT N4903A or ParBERT, jitter injection might be limited.
2.

Polarity as depicted. Sum of all cursors cannot exceed maximum voltage output swing and window. The N4916B voltage amplitude Vpp is defined as the maximum positive sum of all cursors (Vd) = |Pre Amplitude| + |Main Amplitude| + |Post1 Amplitude| + |Post2 Amplitude|; this is in reference to the PCI Express 3.0 specification as shown in Figure 8

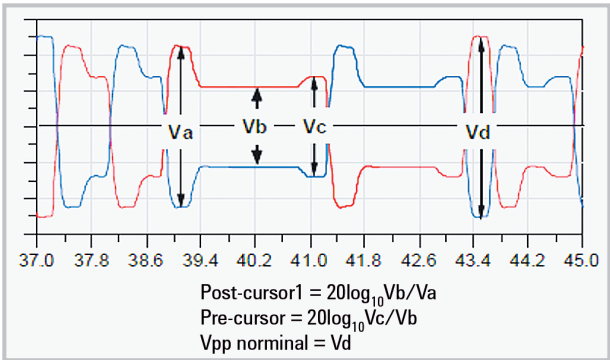


Figure 8. Definition of nominal output amplitude and de-emphasis amplitude



Figure 9. Front panel view of N4916B

Keysight N4916B Specifications (continued)

| Clock multiplier | |
|----------------------------------|---|
| Input frequency range | 1 to 7.5 GHz, Duty cycle 45-55% |
| Multiplier factors | 1, 2 |
| Input | 50 Ω single ended, AC coupled |
| Input voltage swing | 100 mV to 1 V differential |
| Input termination voltage | \pm 2 V |
| Output | 50 Ω differential, replace by: AC coupled. Terminate unused output |
| Output voltage swing | > 500 mV differential |
| Output transition time | < 30 ps typical (20% – 80%) |
| Jitter added | < 500 fs rms typical |
| Connector | SMA female |
| General characteristics | |
| Operating temperature | 5 °C to 40°C (–23 °F to 104 °F) |
| Storage temperature | –40 °C to +70°C (–65 °F to 158 °F) |
| Operating Humidity | 95% relative humidity, non-condensing |
| Storage humidity | 50 % relative humidity |
| Power requirements | 100 V to 240 V, 47 Hz to 63 Hz, 80 VA, the maximum allowed voltage fluctuation is 10% |
| Physical dimensions WxHxD | Bench top (with bumper) 228 x 59 x 246 mm Rack mount (without bumper) 1/2* 19" width, 1U height: 213 x 44.5 x 245 mm |
| Weight net | 2.05 kg (4.51 lb) |
| Weight shipping | 4.65 kg (10.25 lb) |
| Recommended recalibration period | 1 year recommended |



Figure 10. Rear panel view of N4916B

Keysight N4916B Specifications (continued)

| Regulatory standards | |
|----------------------------|--|
| Safety | IEC61010-1:2001, EN61010-1:2001, CAN/CSA-C22 No. 61010-04, UL 61010-1:2004 |
| EMC | IEC61326-1:1997+A1:1998, EN61326-1:1997+A1:1998 |
| Quality management | ISO 9004, ISO 14000 |
| Remote control interfaces | |
| Connectivity | USB 2.0, rear panel, LAN |
| Programming language | SCPI |
| Via J-BERT | Via USB 2.0 to the controlling J-BERT N4903B, which provides LAN, GPIB, USB as remote control interfaces. The N4903B requires software revision 6.5x or higher to control the N4916B; to control the 14.2 Gb/s version of N4916B (serial numbers MY51300500 and higher), the J-BERT N4903B software revision 7.0 is needed |
| Stand-alone user interface | |
| System requirements | OS: Microsoft Windows (verified on XP, SP2), Keysight I/O Libraries Suite rev.15.5, Microsoft .NET 2.0 |

Specification assumptions

The specifications in this document describe the instruments warranted performance. Preliminary values are shown in *italic*. Non-warranted values are described as typical. All specifications are valid in a range from 5 °C to 40 °C ambient temperature after a warm-up time of 30 minutes and after manual calibration of input clock and data timing. If not otherwise stated, all inputs and outputs need to be terminated with 50 Ω to GND.

Ordering Information

| Accessories included in N4916B | 4 x 50 Ω terminations 3.5 mm, USB cable, test report “UK6”, CD-ROM with software and user documentation |
|--|--|
| 4-tap de-emphasis signal converter | N4916B-STD |
| Clock multiplier | N4916B-001 |
| Recommended accessories | |
| Matched cable pair for connecting data and clock input to J-BERT N4903B | N4915A-010 |
| Adapter 3.5 mm (f) to 2.4 mm (m) (1 each is needed for connecting N4916B with N4915A-010 cable kit to N4903A or ParBERT) | N4911A-002 |
| Rack mount kit | E5810A-100 |
| Calibration services | |
| Calibration services | R1280, R1282 |
| Productivity assistance | R1380-N49xx |


Related Keysight Literature

| Remote control interfaces | |
|---|-------------|
| <i>J-BERT N4903B High-Performance Serial BERT Data Sheet</i> | 5990-3217EN |
| <i>81250A ParBERT Data Sheet</i> | 5968-9188EN |
| <i>De-emphasized signal generation with N4916A Application Note</i> | 5989-7193EN |

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

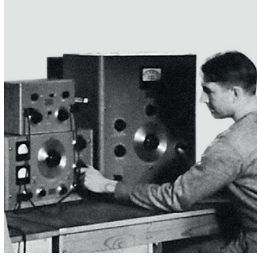

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

PCI-SIG®, PCIe® and the PCI Express® are US registered trademarks and/or service marks of PCI-SIG.

www.keysight.com/find/N4916B

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.
© Keysight Technologies, 2017
Published in USA, December 1, 2017
5990-4630EN
www.keysight.com