

# Agilent Technologies

## E5900B Emulation Probes

### Data Sheet

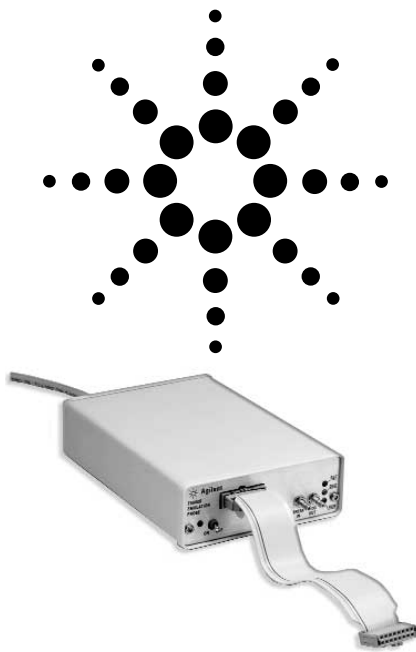


Figure 1. Agilent E5900B emulation probe

The Agilent E5900B series of emulation probes provide an electrical interface to a supported microprocessor's on-chip debug port (BDM or JTAG), enabling access for either debuggers or Agilent 16700 Series logic analyzers and oscilloscopes.

Agilent E5900B emulation probes connect to industry-leading debuggers via 10/100 Base-T LAN. While operating with the debugger, the probes provide code downloading as well as run control and access to on-chip registers and memory.

The emulation probes are self-powered, making them ideally suited for working in battery-powered and other systems that have not budgeted extra power for debug tools.

#### Debugger Interface

Agilent engineering labs have tested the compatibility of the E5900B probes with industry-leading debuggers and development systems from Green Hills, Mentor Graphics, Metrowerks and Wind River for a wide range of processors. Please refer to the Agilent web site for the most current listing of debuggers at [www.agilent.com](http://www.agilent.com)

- Support for ARM7/ARM9/ARM9TDMI, MIPS, Motorola/IBM PowerPC 4xx, 6xx, & 8xx; MPC 82xx; MPC 74xx and M-Core processors
- 10/100T LAN connectivity to industry-standard debuggers
- Download speeds up to 1Mbyte/sec
- Standalone operation with an industry-leading debugger

- Operation coupled with logic analyzers and oscilloscopes in the Agilent 16700 Series logic analysis systems for complete target system analysis
- Support for 1.2 V to 5 V operation
- IEEE 1149.1 (JTAG) or BDM connection to the processor's debug port
- Self powered, no target power required
- Easy upgrade to meet changing processor needs

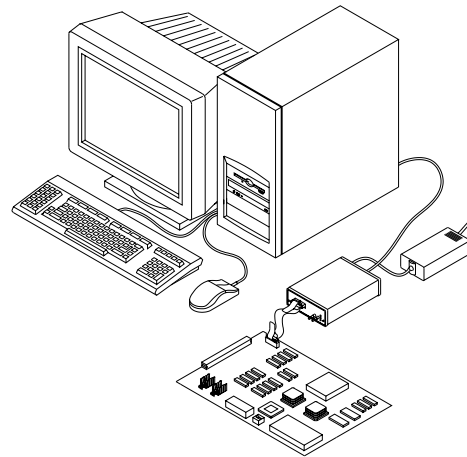



Figure 2. Agilent E5900B operating with a PC hosted debugger via LAN connection

#### A System Troubleshooting Tool

Coupling an oscilloscope and/or logic analyzer to an emulation probe via the probe's trigger output and break input ports lets you view system operation as related to CPU status. For example, in systems where the processor supports an external break input, an oscilloscope's trigger output can command the processor to break if a critical control line ever enters a specified state.



Agilent Technologies

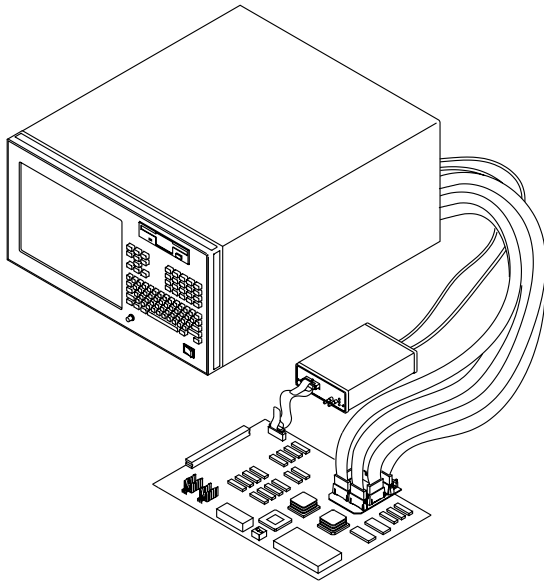

**Figure 3. Agilent E5900B emulation module operating with the 16702 logic analyzer**

### Quickly Isolate System Integration Problems

The Agilent E5900B emulation probes can be tightly coupled to the Agilent 16700 Series logic analysis systems. These systems enable quick determination of your most difficult hardware, software and system integration problems. The E5900B operate under control of the logic analyzer via the LAN or with the addition of the E5901B emulation module. With logic analysis providing timing and state analysis of system operation, the emulation probe can monitor internal microprocessor activity. This combination of logic analysis and emulation gives you a view of your total system, encompassing everything from signals to source code.

### Easy Migration Protects Your Investment

The E5900B emulation probes can continue to be useful development tools when a different processor is selected for new projects. Agilent migration kits provide an easy and economical method to convert existing emulation probes to keep up with your changing processor needs.

### Selection Guide

Select the configuration of the emulation probe for your application from the following table.

| Processor                                                                          | Agilent E5900B Option #                |
|------------------------------------------------------------------------------------|----------------------------------------|
| <b>Arm</b><br>ARM7/9 TDMI<br>ARM7/9                                                | 300                                    |
| <b>IBM</b><br>PPC 4xx<br>PPC 6xx<br>PPC7xx                                         | 060<br>060<br>070                      |
| <b>MIPS</b><br>MIPS 32 4Kc<br>MIPS 32 4Km<br>MIPS 32 4Kp<br>MIPS 64 5Kc            | 200                                    |
| <b>Motorola</b><br>MPC 6xx<br>MPC 7xx<br>MPC 8xx<br>MPC 74xx<br>MPC 82xx<br>M-CORE | 060<br>070<br>080<br>110<br>100<br>090 |

# Performance Characteristics

## Probe Input/Output Characteristics

|                   |                                                                                                                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Target connection | JTAG as per IEEE 1149.1 specification. Pin out is specific to the processor. Details of the JTAG connection pin out can be found on the Agilent web at <a href="http://www.agilent.com">http://www.agilent.com</a> |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## JTAG Input Characteristics

|                                  |                                                                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| TDO, DBGACK, & RTCK              | $R_{in} = 4.7k\ \Omega$ pull-up to $V_{ref}$<br>$C_{in}$ TDO = 75 pF, DBGACK = 95 pF,<br>DTCK = 80 pF                                 |
| TDO sampling with respect to TCK | Selectable: falling or rising TCK<br>Minimum required setup & hold window = 7.0 ns<br>$t_{su} = 7.5$ ns, $t_h = -0.5$ ns              |
| $V_{ref}^1$                      | $R_{in} = 25k\ \Omega$ pull down to ground                                                                                            |
| SRST <sup>2</sup>                | $R_{in}$ (inactive) = 4.7k $\Omega$ pull-up to $V_{ref}$<br>$R_{in}$ (active) = 12 $\Omega$ pull down to ground<br>$C_{out} = 200$ pF |

## JTAG Output Characteristics

|                              |                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------|
| TDI, TCK, TMS, TRST, & DBGRO | $V_{oh}/I_{oh} = 66 \pm 15\ \Omega$ to $V_{ref}$<br>$V_{ol}/I_{ol} = 66 \pm 15\ \Omega$ to 0.2V |
| Delay                        | TDI & TMS delay from<br>TCK falling edge to TDI and TMS valid<br>Min 1 ns max 2.5 ns            |

## Operating Voltage

|                 |                |
|-----------------|----------------|
| Operating range | 1.2 V to 5.0 V |
|-----------------|----------------|

## Communications

|             |                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------|
| LAN         | RJ-45 connector IEEE 802.3 Auto sensing 10/100<br>BASE-T Ethernet maximum download speed<br>1 Mbyte/sec |
| Trigger out | SMB (m) 2 V into 50 ohm load                                                                            |
| Break in    | SMB (m) Input RC = 2k ohms & 20 pF<br>Edge triggered, TTL level<br>Maximum input = 5V above VCC         |

## Power

|               |                                                                                                                |
|---------------|----------------------------------------------------------------------------------------------------------------|
| Power supply  | 12 V dc, maximum current = 1 A<br>External module, 100–240 V input auto sensing<br>50/60 Hz, IEC 320 connector |
| Physical size | 105 mm (4.13 inch) wide x 151 mm (5.94 inch)<br>deep x 40 mm (1.57 inch) high                                  |

## Environmental

|                   |                                                                                             |
|-------------------|---------------------------------------------------------------------------------------------|
| Temperature       | Operating: 0°C to +40°C (+32°F to +104°F)<br>Not operating: -40°C to +60°C (-40° to +140°F) |
| Altitude          | Operating and not operating: 4600 m (15 K feet)                                             |
| Relative humidity | 80% @ 40°C for 24 hours                                                                     |

## Regularity Compliance

|  |                                                                                                                                                                                                                                           |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | EMC CISPR 11:1990/EN 55011:1991<br>Group 1, Class A<br>IEC 801-2:1991/EN50082-1:1992 4kVCD,8kV AD<br>IEC 801-3:1994/EN 50082:1993 3 V/m (1 kHz 80%<br>AM,27-1 kHz)<br>IEC 801-4:1998/EN 50082-1:1992 0.RkV Sig lines,<br>1 kV power lines |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Safety Approval

|  |                                                            |
|--|------------------------------------------------------------|
|  | IEC 1010-1:1990; AMD 1:1992; UL 1244;<br>CSA-C22.2 No. 231 |
|--|------------------------------------------------------------|

1.  $V_{ref}$  is used to determine the target power status and the reference for input threshold and output voltage swings. The Agilent emulation probes do not draw power from the target system.
2. Open collector output. Pulled up to generated voltage equivalent to the  $V_{ref}$  voltage with a 2.61 k  $\Omega$  pull-up resistor.

| <b>E5900B Emulation Probe Options</b>                                                                                                                               |                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|
| Option Number                                                                                                                                                       | Processors Supported                      |
| 060                                                                                                                                                                 | PPC 4xx, PPC 6xx, & MPC 6xx               |
| 070                                                                                                                                                                 | MPC 7xx                                   |
| 080                                                                                                                                                                 | MPC 8xx                                   |
| 090                                                                                                                                                                 | M•Core                                    |
| 100                                                                                                                                                                 | MPC 82xx                                  |
| 110                                                                                                                                                                 | MPC 7400, MPC 7410, MPC 7440 and MPC 7450 |
| 200                                                                                                                                                                 | MIPS 32 MIPS 64                           |
| 300                                                                                                                                                                 | ARM7, ARM 9, & ARM 9 TDMI                 |
| Note: Most current supported processor information can be obtained from the Agilent web at <a href="http://www.cos.agilent.com/probe">www.cos.agilent.com/probe</a> |                                           |

## Ordering Information

### E5900B Emulation Probe

Emulation probe that provides access to the processor via BDM or JTAG interface.

Supplied with power supply, line cord, User's Guide, and processor specific interface cables.

### E5901B Emulation Module

Emulation probe and interface module for Agilent 16700 Series logic analyzer.

Supplied with E5900B emulation probe, emulation interface module, power supply, line cord, logic analyzer application software, and processor specific interface cables.

### E5902B Migration Kit

Personality conversion of an existing E5900B emulation probe or E5901B emulation module to support a different processor.

Supplied with software to reprogram the E5900B, User's Guide, tool kit, and processor specific interface cables.

## Recommended Accessories

### 8120-5048 SMB (f) to BNC (m)

50  $\Omega$  trigger cable 1.22 m (48 inch)

## Related Literature

## Document Number

*Agilent Technologies 16700 Series*

*Logic Analysis System, Product Overview* .....5968-9661E

*Processor and Bus Support for*

*Agilent Technologies Logic Analyzers, Configuration Guide* .....5966-4365E

### **Agilent Technologies' Test and Measurement Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

#### **Our Promise**

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

#### **Your Advantage**

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

**By internet, phone, or fax, get assistance with all your test & measurement needs**

#### **Phone or Fax**

##### **United States:**

(tel) 800 829 4444

##### **Canada:**

(tel) 877 894 4414

(fax) 905 282 6495

##### **China:**

(tel) 800 810 0189

(fax) 800 820 2816

##### **Europe:**

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

##### **Japan:**

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

##### **Korea:**

(tel) (82 2) 2004 5004

(fax) (82 2) 2004 5115

##### **Latin America:**

(tel) (305) 269 7500

(fax) (305) 269 7599

##### **Taiwan:**

(tel) 0800 047 866

(fax) 0800 286 331

##### **Other Asia Pacific Countries:**

(tel) (65) 6375 8100

(fax) (65) 6836 0252

Email: [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

##### **Online Assistance:**

**[www.agilent.com/find/assist](http://www.agilent.com/find/assist)**

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2004

Printed in USA, March 5, 2004

5988-2966EN



### **Agilent Email Updates**

**[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)**

Get the latest information on the products and applications you select.

#### **Agilent T&M Software and Connectivity**

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit **[www.agilent.com/find/connectivity](http://www.agilent.com/find/connectivity)** for more information.



### **Agilent Direct**

**[www.agilent.com/find/agilentdirect](http://www.agilent.com/find/agilentdirect)**

Quickly choose and use your test equipment solutions with confidence.



**Agilent Technologies**