
Keysight Add 4-Port Capability Upgrade Kit For Version 6, Single-Source Synthesizers

To Upgrade PNA N5227/47B
Option 201 to Option 401

Upgrade Kit Order Number:
N5227BU-601 and
N5247BU-601

Kit Number: N5227-60113

This Installation Note is for upgrading the N5227B Microwave Network Analyzers from Option 201 to Option 401.

Notices

© Keysight Technologies, Inc.
2009-2024

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies, Inc. as governed by United States and international copyright laws.

Trademark Acknowledgments

Manual Part Number

N5227-90113

Edition

Edition 1, March 2024

Printed in USA/Malaysia

Published by:
Keysight Technologies
1400 Fountaingrove Parkway
Santa Rosa, CA 95403

Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED “AS IS,” AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS

DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

U.S. Government Rights

The Software is “commercial computer software,” as defined by Federal Acquisition Regulation (“FAR”) 2.101. Pursuant to FAR 12.212 and 27.405-3 and Department of Defense FAR Supplement (“DFARS”) 227.7202, the U.S. government acquires commercial computer software under the same terms by which the software is customarily provided to the public.

Accordingly, Keysight provides the Software to U.S. government customers under its standard commercial license, which is embodied in its End User License Agreement (EULA), a copy of which can be found at

<http://www.keysight.com/find/sweula>

The license set forth in the EULA represents the exclusive authority by which the U.S. government may use, modify, distribute, or disclose the Software. The EULA and the license set forth therein, does not require or permit, among other things, that Keysight: (1) Furnish technical information related to commercial computer software or commercial computer software documentation that is not customarily provided to the public; or (2) Relinquish to, or otherwise provide, the government rights in excess of these rights customarily provided to the public to use, modify, reproduce, release, perform, display, or disclose commercial computer software or commercial computer software documentation. No additional

government requirements beyond those set forth in the EULA shall apply, except to the extent that those terms, rights, or licenses are explicitly required from all providers of commercial computer software pursuant to the FAR and the DFARS and are set forth specifically in writing elsewhere in the EULA. Keysight shall be under no obligation to update, revise or otherwise modify the Software. With respect to any technical data as defined by FAR 2.101, pursuant to FAR 12.211 and 27.404.2 and DFARS 227.7102, the U.S. government acquires no greater than Limited Rights as defined in FAR 27.401 or DFAR 227.7103-5 (c), as applicable in any technical data.

Safety Notices

CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a CAUTION notice until the indicated conditions are fully understood and met.

WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a WARNING notice until the indicated conditions are fully understood and met.

NOTICE: This document contains references to Agilent Technologies. Agilent's former Test and Measurement business has become Keysight Technologies. For more information, go to **www.keysight.com**.



Keysight Add 4-Port Capability Upgrade Kit
Upgrade Kit Number: N5227-60113
Installation Note

Description of the Upgrade

This upgrade converts your N5227B/N5247B Option 201 2-port analyzer to an N5227B/N5247B Option 401 4-port analyzer by adding:

- an additional 26.5 GHz source board
- an additional 13.5 GHz source synthesizer board
- two additional 40 GHz doublers
- two additional 70 GHz doublers
- an additional mixer brick
- two additional receiver couplers and brackets
- two additional test port couplers
- an additional cable guard for front panel jumpers
- a splitter
- a 3 dB pad
- a modified front panel
- many additional new cables

Refer to **“Overview of the Installation Procedure”** on page 15.

CAUTION

This repair must be done at a service center or a self-maintainer service center! Refer to **“Getting Assistance from Keysight”** on page 6.

Getting Assistance from Keysight

Installing this upgrade kit requires special skills and experience. If you think you may not be qualified to do the work, or need advice, contact Keysight.

Contacting Keysight

Assistance with test and measurements needs and information on finding a local Keysight office are available on the Web at:

<http://www.keysight.com/find/assist>

If you do not have access to the Internet, please contact your Keysight field engineer.

NOTE

In any correspondence or telephone conversation, refer to the Keysight product by its model number and full serial number. With this information, the Keysight representative can determine whether your product is still within its warranty period.

If You Have Problems With the Upgrade Kit Contents

Keysight stands behind the quality of the upgrade kit contents. If you have problems with any item in the kit, refer to www.keysight.com and the **Contact**

Keysight () link.

Getting Prepared

CAUTION

The PNA contains extremely sensitive components that can be ruined if mishandled. Follow instructions carefully when making cable connections, especially wire harness connections.

The person performing the work accepts responsibility for the full cost of the repair or replacement of damaged components.

To successfully install this upgrade kit, you will need the following:

- A license key - refer to **“License Key Redemption”** below.
- A PDF copy or a paper copy of the PNA Service Guide - refer to **“Downloading the Online PNA Service Guide”** below.
- An ESD-safe work area - refer to **“Protecting Your Workspace from Electrostatic Discharge”** below.
- Correct tools - refer to **“Tools Required for the Installation” on page 10.**
- Enough time - refer to **“About Installing the Upgrade” on page 10.**
- Test equipment for the post-upgrade adjustments and full instrument calibration. To view the equipment list, click the Chapter 3 bookmark “Tests and Adjustments” in the PDF Service Guide¹.

License Key Redemption

NOTE

Ensure that you are connected to an external server, before attempting to download your email and license key file.

If you are unfamiliar with the licensing process, refer to <https://www.keysight.com/us/en/assets/9018-04534/installation-guides/9018-04534.pdf> (N5242-90024).

NOTE

The enclosed Software Entitlement Certificate is a receipt, verifying that you have purchased a licensed option for the PNA of your choice. You must now use a Keysight Web page to request a license key file for the instrument that will receive the option.

To enable the option product(s), you must request license key(s) file from the Keysight Software Manager:

<http://www.keysight.com/find/softwaremanager>:

To complete the request, you will need to gather the following information:

- From the certificate
 - Order number

1. See **“Downloading the Online PNA Service Guide” on page 9.**

Getting Prepared

- Certificate number
- From your instrument
(Instrument information is available in the network analyzer - on the toolbar, click Help, then click About Network Analyzer.)
 - Model number
 - Serial number
 - Host ID

Part of the OEC procedure to obtain the 12-digit license key online requires you to provide the HostID number of the PNA. This HostID number is NOT the one currently shown on the PNA. To determine your new HostID, Keysight personnel should use the new model number with the utility at go to <http://mktwww.srs.is.keysight.com/field/service/network/pna/upgrades.html>.

Non-Keysight personnel should contact Keysight at <http://www.keysight.com/key/contactus>.

Using the information just gathered, you must request license key(s) from the Keysight Software Manager:
<http://www.keysight.com/find/softwaremanager>.

You will need to provide an email address, to which Keysight will promptly email your license key file. Refer to **“License Key Redemption” on page 7**.

Verify the License Contents

Refer to the license message you received from Keysight:

If the model number, serial number, or option number do not match those on the license message you received from Keysight, you will not be able to install the license key file. If this is the case you received from Keysight, you will not be able to install the license key file. If this is the case, contact Keysight for assistance. Refer to **“Getting Assistance from Keysight” on page 6**.

Downloading the Online PNA Service Guide

To view the online Service Guide for your PNA model number, use the following steps:

1. Go to www.keysight.com.
2. In the Search box, enter the model number of the analyzer (e.g., N5225B) and click **Search**.
3. Click **Support** > **Keysight Product Support**.
4. In the **Search Support** area type your instrument's model number (e.g., N2225B).
5. Press **Enter**.
6. Scroll down to the **PRINT DOCUMENTATION** section and click to select **Service Manual**.

The **Service Manual** for your instrument will be displayed near the top of the right column.

7. Click the hyperlink of the Service Guide title to download the PDF file.
8. When the PDF of the Service Guide is displayed, scroll through the Contents section bookmarks to locate the information needed.

Protecting Your Workspace from Electrostatic Discharge

For information, click on the Chapter 1 bookmark, "Electrostatic Discharge Protection" in the PDF Service Guide¹.

ESD Equipment Required for the Installation

Description	Keysight Part Number
ESD grounding wrist strap	9300-1367
5-ft grounding cord for wrist strap	9300-0980
2 x 4 ft conductive table mat and 15-ft grounding wire	9300-0797
ESD heel strap (for use with conductive floors)	9300-1308

Tools Required for the Installation

Description	Qty	Part Number
T-6 TORX driver - set to 4 in-lbs (0.45 N.m)	1	N/A
T-8 TORX driver - set to 6 in-lbs (0.68 N.m)	1	N/A
T-10 TORX driver - set to 9 in-lbs (1.02 N.m)	1	N/A
T-20 TORX driver - set to 21 in-lbs (2.38 N.m)	1	N/A
5/16-in (8 mm) nutsetter or open end torque wrench- set to 10 in-lbs (1.13 N.m)	1	N/A
3/16-in (5 mm) nutsetter or open end torque wrench - set to 6 in-lbs (0.68 N.m)	1	N/A
5/8-in (16 mm) nutsetter or open end torque wrench - set to 21 in-lbs (2.38 N.m)	1	N/A
9 mm nutsetter or open end torque wrench - set to 21 in-lbs (2.38 N.m)	1	N/A
1-in (25.4 mm) torque wrench - set to 72 in-lbs (8.15 N.m)	1	N/A

CAUTION

Use a 5/16-in torque wrench set to 10 in-lbs on all cable connections except the front and rear panel bulkhead connectors. On these, use a 5/16 inch nutsetter or open end torque wrench set to 21 in-lb.

About Installing the Upgrade

Products affected	N5227B/N5247B Option 201
Installation to be performed by	Keysight service center or personnel qualified by Keysight
Estimated installation time	5 hours
Estimated adjustment time	0.5 hours
Estimated full instrument calibration time	4.5 hours

Items Included in the Upgrade Kit

Check the contents of your kit against the following list. If any part is missing or damaged, contact Keysight Technologies. Refer to **“Getting Assistance from Keysight” on page 6**.

Table 1 **Contents of Upgrade Kit N5227-60113**

Ref Desig.	Description	Qty	Part Number
-	Installation note (this document)	1	N5227-90113
-	Software Entitlement Certificate	1	9030-0000
-	China RoHS Addendum for kits	1	9320-6722
A10	26.5 GHz source (2) board	1	5087-7780
A12	40 GHz doubler assembly port 3	2	5087-7346
A13	40 GHz doubler assembly port 4		
A17	13.5 GHz (source 2) synthesizer board	1	N5240-60074
A26	Splitter	1	5067-4086
A28	Mixer brick (2)	1	5087-7337
A30	Receiver coupler, test port 3	2	5087-7744
A31	Receiver coupler, test port 4		
A34	Coupler, test port 3	2	5087-7778
A35	Coupler, test port 4		
A61	70 GHz doubler assembly, test port 3	2	5087-7336
A62	70 GHz doubler assembly, test port 4		
A69	3-dB attenuator	1	08490-60037
-	Bulkhead connector, 1.85 mm, 50-ohm for test set front plate	12	1250-4747 ^a
-	Washer for bulkhead connectors, front panel	12	1250-3310
-	Nut for bulkhead connectors, front panel	12	1250-3516
-	Machine screw, M2.0 x 6, pan head (to attach 2 receiver couplers to brackets)	8	0515-0658
-	Machine screw, M3 x 10, pan head (to attach cable bracket mount to test set deck)	3	0515-0374
-	Machine screw, M3.0 x 8, pan head (to attach receiver coupler assemblies to deck)	6	0515-0372
-	Machine screw, M3 x 16, pan head (to attach 2 70 GHz doublers to mounts)	8	0515-0375

Items Included in the Upgrade Kit

Table 1 **Contents of Upgrade Kit N5227-60113**

Ref Desig.	Description	Qty	Part Number
-	Machine screw, M4.0 x 10, pan head (to attach the following boards to the analyzer chassis: A17 13.5 GHz synthesizer board, A10 26.5 GHz source board, A12 40 GHz doubler assembly port 3, and A13 40 GHz doubler assembly port 4.)	8	0515-0380
-	Machine screw, M3.0 x 6, pan head	4	0515-0430
-	Machine screw, M3.0 x 25, pan head	2	0515-0667
-	Machine screw, M3.0 x 6, 90-DEG-Flat head (to attach front panel near ports 3 and 4)	2	0515-1946
-	Machine screw, M2.5 x 16, pan head (to attach splitter to mixer brick)	2	0515-2007
-	Machine screw, M3.0 x 35, pan head (to attach A28 mixer brick to block)	3	0515-1038
-	Machine screw, M3.0 x 20, flat head (to attach bracket to A10 26.5 GHz source)	2	0515-2078
-	Machine screw, M3.0 x 18, pan head (to attach bracket to A10 26.5 GHz source)	1	0515-0666
-	Lower front panel overlay, 4-port - (N5227B Option 401)	1	N5227-80027
-	Lower front panel overlay, 4-port - (N5247B Option 401)	1	N5247-80021
-	4-Port Dress Panel	1	N5240-00009
-	Test set front plate, 4-port	1	N5247-00009
-	Protective cap, black plastic	4	1401-0214
-	Pad (secured to each receiver coupler)	2	0403-0179
-	Gap pad (between each test coupler and the test set front plate)	4	E4403-20033
-	Vibration mount (between couplers 1 & 3, and 2 & 4)	2	0460-2725
-	Mounting nuts (for port 3 & 4 test port couplers)	2	5022-1087
-	50 ohm load, attached to A13 40 GHz doubler	3	1250-4261
-	Cable guard, center jumper cables	1	N5242-00049
-	Cable clamp to secure W41 (N5247-20075), W37 (N5247-20077), W45 (N5247-20076), and W33 (N5247-20078).	5	1400-1334
-	Cable tie wrap to secure W18 (N5247-20084), W14 (N5247-20072), and W54 (N5247-20062).	5	1400-0249
-	Bracket, rear, bottom side - for semi rigid cables	1	N5247-00006
-	Bracket for receiver coupler, port 3	1	N5247-00012
-	Bracket for receiver coupler, port 4	1	N5247-00011
-	Bracket for A10 26.5 GHz source (2) board	1	N5247-20136
W2	RF cable, A10 source (2) P1 to A17 13.5 GHz source (2) synthesizer J1207	1	N5245-20100

Items Included in the Upgrade Kit

Table 1 **Contents of Upgrade Kit N5227-60113**

Ref Desig.	Description	Qty	Part Number
W7	RF cable, A10 source (2) P5 to A12 port 3 40 GHz doubler P1	1	N5245-20034
W8	RF cable, A10 source (2) P3 to A13 port 4 40 GHz doubler P1	1	N5247-20125
W9	RF cable, A10 source (2) P4 to A12 port 3 40 GHz doubler P4	1	N5245-20032
W10	RF cable, A12 port 3 40 GHz doubler P3 to A13 port 4 40 GHz doubler P4	1	N5245-20033
W15	RF cable, A12 port 3 40 GHz doubler P6 to W16	1	N5247-20114
W16	RF cable, A61 port 3 70 GHz doubler to W15	1	N5247-20060
W17	RF cable, A12 port 3 40 GHz doubler P2 to W18	1	N5247-20086
W18	RF cable, A61 port 3 70 GHz doubler to W17	1	N5247-20084
W19	RF cable, A13 port 4 40 GHz doubler P6 to W20	1	N5247-20114
W20	RF cable, A62 port 4 70 GHz doubler to W19	1	N5247-20015
W21	RF cable, A13 port 4 40 GHz doubler P2 to W22	1	N5247-20086
W22	RF cable, A62 port 4 70 GHz doubler to W21	1	N5247-20068
W28	RF cable, A61 port 3 70 GHz doubler to A30 port 3 receiver coupler	1	N5247-20052
W29	RF cable, A62 port 4 70 GHz doubler to A31 port 4 receiver coupler	1	N5247-20074
W32	RF cable, Port 1 CPLR THRU to A33 port 1 coupler	1	N5247-20016
W33	RF cable, A29 port 1 receiver coupler to A37 reference mixer switch	1	N5247-20078
W34	RF cable, A33 port 1 coupler to front-panel Port 1 CPLR ARM	1	N5247-20082
W35	RF cable, A30 port 3 receiver coupler to front-panel port 3 SOURCE OUT	1	N5247-20023
W36	RF cable, Port 3 CPLR THRU to A34 port 3 coupler	1	N5247-20006
W37	RF cable, A30 port 3 receiver coupler to front-panel REF 3 SOURCE OUT	1	N5247-20077
W38	RF cable, A34 port 3 coupler to front-panel Port 3 CPLR ARM	1	N5247-20007
W39	RF cable, A31 port 4 receiver coupler to front-panel port 4 SOURCE OUT	1	N5247-20035
W40	RF cable, Port 4 CPLR THRU to A35 port 4 coupler	1	N5247-20017
W41	RF cable, A31 port 4 receiver coupler to front-panel REF 4 SOURCE OUT	1	N5247-20075
W42	RF cable, A35 port 4 coupler to front-panel Port 4 CPLR ARM	1	N5247-20026
W44	RF cable, Port 2 CPLR THRU to A36 port 2 coupler	1	N5247-20018
W45	RF cable, A32 port 2 receiver coupler to front-panel REF 2 SOURCE OUT	1	N5247-20076
W46	RF cable, A36 port 2 coupler to front-panel port 2 CPLR ARM	1	N5247-20019
W48	RF cable, Port 3 RCVR C IN to A28 mixer brick (C)	1	N5247-20063

Items Included in the Upgrade Kit

Table 1 **Contents of Upgrade Kit N5227-60113**

Ref Desig.	Description	Qty	Part Number
W49	RF cable, Port 4 RCVR D IN to A28 mixer brick (D)	1	N5247-20073
W54	RF cable, REF 3 RCVR R3 IN to A28 mixer brick (R3)	1	N5247-20062
W55	RF cable, REF 4 RCVR R4 IN to A69 3 dB pad on A28 mixer brick (R4)	1	N5247-20067
W58	RF cable, 2.4 mm cap for A28 mixer brick	1	N5247-20138
W60	RF cable, front panel jumper	6	N5247-20107
W62	RF cable, A25 HMA26.5 to A26 splitter	1	N5247-20111
W63	RF cable, A26 splitter to A27 mixer brick	1	N5245-20023
W64	RF cable, A26 splitter to A28 mixer brick	1	N5245-20022
W67	RF cable, A12 port 3 40 GHz doubler P5 to W68	1	N5247-20096
W68	RF cable, rear-panel port RF2 OUT (J12) to W67	1	N5247-20088
W72	RF cable, A27 mixer brick (R1) to A24 IF multiplexer (P411)	1	N5242-60021
W73	RF cable, A27 mixer brick (R2) to A24 IF multiplexer (P412)	1	N5242-60022
W75	RF cable, A28 mixer brick (D) to A24 IF multiplexer (P801)	1	N5242-60024
W76	RF cable, A28 mixer brick (R4) to A24 IF multiplexer (P414)	1	N5242-60019
W77	RF cable, A28 mixer brick (R3) to A24 IF multiplexer (P413)	1	N5242-60020
W78	RF cable, A28 mixer brick (C) to A24 IF multiplexer (P601)	1	N5242-60023
W80	RF cable, A24 IF multiplexer board P203 to A16 SPAM board J2	1	N5242-60013
W82	RF cable, A24 IF multiplexer board P603 to A16 SPAM board J5	1	N5242-60015
W87	RF cable, A14 frequency ref (J7) to A17 13.5 GHz (source 2) synth (J5)	1	N5242-60030
W93	RF cable, A61 port 3 70 GHz dblr J2 to A12 40 GHz dblr J401	1	N5247-60010
W94	RF cable, A61 port 3 70 GHz dblr J4 to A12 40 GHz dblr J500	1	N5247-60011
W95	RF cable, A62 port 4 70 GHz doubler (J2) to A13 40 GHz doubler (J401)	1	N5247-60012
W96	RF cable, A62 port 4 70 GHz dblr J4 to A13 40 GHz dblr J500	1	N5247-60013
-	Ribbon cable, A23 test set motherboard J5 to A61 port 3 70 GHz doubler J1	2	N5247-60018
-	Ribbon cable, A23 test set motherboard J3 to A62 port 4 70 GHz doubler J1		
-	Ribbon cable, A23 test set motherboard J552 to A28 mixer brick (2) J52	1	N5247-60015

a. This upgrade kit may contain either a bulkhead adapter part number 5065-4673 or 1250-4747.

NOTE

Extra quantities of items such as protective plastic caps, screws, cable ties, and cable clamps may be included in this upgrade kit. It is normal for some of these items to remain unused after the upgrade is completed.

Installation Procedure for the Upgrade

The network analyzer must be in proper working condition prior to installing this option. Any necessary repairs must be made before proceeding with this installation.

WARNING

This installation requires the removal of the analyzer's protective outer covers. The analyzer must be powered down and disconnected from the mains supply before performing this procedure.

Overview of the Installation Procedure

- "Step 1. Obtain a Keyword and Verify the Information."
- "Step 2. Remove the Outer Cover."
- "Step 3. Remove the Inner Cover."
- "Step 4. Remove the Front Panel Jumper Cables and Cable Guards."
- "Step 5. Remove the Front Panel Assembly."
- "Step 6. Remove the A23 Test Set Motherboard."
- "Step 7. Remove the Testset Stabilizer Bracket from the A24 IF Multiplexer Board."
- "Step 8. Remove Some Bottom-Side (Test Set) Cables."
- "Step 9. Remove the A60 70 GHz Doubler Assembly From the Test Set Deck."
- "Step 10. Assemble the A61 70 GHz Doubler on the Doubler Mount."
- "Step 11. Reinstall the A60/A61 70 GHz Doubler Assembly."
- "Step 12. Remove the A63 70 GHz Doubler Assembly From the Test Set Deck."
- "Step 13. Assemble the A62 70 GHz Doubler on the Doubler Mount."
- "Step 14. Reinstall the A62/A63 70 GHz Doubler Assembly."
- "Step 15. Install Bracket to A10 Source Assembly."
- "Step 16. Assemble the A10 26.5 GHz Source 2 Assembly."
- "Step 17. Assemble and Install the A12 40 GHz Doubler Assembly."
- "Step 18. Install the A12 40 GHz Doubler Cables."

- “Step 19. Assemble and Install the A13 40 GHz Doubler Assembly.”
- “Step 20. Install the A13 40 GHz Doubler Cables.”
- “Step 15. Install Bracket to A10 Source Assembly.”
- “Step 22. Install the A17 13.5 GHz (Source 2) Synthesizer Board and Cables.”
- “Step 23. Install the Cable Bracket Mount.”
- “Step 24. Remove the A27 Mixer Brick Assembly.”
- “Step 25. Assemble the A28 Mixer Brick Assembly.”
- “Step 26. Install the A27/A28 Mixer Brick Assemblies.”
- “Step 27. Assemble the A30 and A31 Receiver Coupler Assemblies.”
- “Step 28. Install the A30 and A31 Receiver Coupler Assemblies.”
- “Step 29. Assemble the A33 - A36 Test Port Coupler Assemblies.”
- “Step 30. Remove and Disassemble the 2-Port Test Set Front Plate.”
- “Step 31. Install the LED Boards and Test Port Coupler Assemblies to the 4-Port Test Set Front Plate.”
- “Step 32. Install the Bulkhead Connectors in the Test Set Front Plate.”
- “Step 33. Install the 4-Port Coupler Plate Assembly to the Deck.”
- “Step 34. Install Some Bottom-Side (Test Set) Cables.”
- “Step 35. Install Cables on IF Multiplexer Board.”
- “Step 36. Reinstall the Testset Stabilizer Bracket on the A24 IF Multiplexer Board.”
- “Step 37. Reinstall the A23 Test Set Motherboard.”
- “Step 38. Install Cables on the A23 Test Set Motherboard.”
- “Step 39. Replace the Front Panel’s Lower Dress Panel.”
- “Step 40. Reinstall Front Panel Assembly.”
- “Step 41. Install the Overlay.”
- “Step 42. Install the Jumper Cables.”
- “Step 43. Position the Cables and Wires to Prevent Pinching.”
- “Step 44. Reinstall the Inner Cover.”
- “Step 45. Reinstall the Outer Cover.”
- “Step 46. Remove Option 201 License.”
- “Step 47. Enable Option 401.”
- “Step 48. Perform Post-Upgrade Adjustments and Calibration.”
- “Step 49. Prepare the PNA for the User.”

Step 1. Obtain a Keyword and Verify the Information

Follow the instructions on the Software Entitlement Certificate supplied to obtain a license key for installation of this upgrade. Refer to **“License Key Redemption” on page 7**.

Verify that the model number, serial number, and option number information on the license key match those of the instrument on which this upgrade will be installed.

Once the license key file has been received and the information verified, you can proceed with the installation at step 2.

NOTE

If the model number, serial number, or option number do not match those on your license key file, you will not be able to install the option. If this is the case, contact Keysight for assistance before beginning the installation of this upgrade. Refer to **“Contacting Keysight” on page 6**.

Step 2. Remove the Outer Cover

For instructions, click the Chapter 7 bookmark “Removing the Covers” in the PDF Service Guide.

Step 3. Remove the Inner Cover

For instructions, click the Chapter 7 bookmark “Removing the Covers” in the PDF Service Guide¹.

Step 4. Remove the Front Panel Jumper Cables and Cable Guards

1. Pull the two cable guards off of the front panel jumper cables. Save them for re-installation later.
2. Remove all front panel jumper cables. Keep for re-installation later.

Step 5. Remove the Front Panel Assembly

For instructions, click the Chapter 7 bookmark “Removing and Replacing the Front Panel Assembly” in the PDF Service Guide¹.

Step 6. Remove the A23 Test Set Motherboard


For instructions, click the Chapter 7 bookmark “Removing and Replacing the A23 Test Set Motherboard” in the PDF Service Guide¹.

1. See **“Downloading the Online PNA Service Guide” on page 9**.

Step 7. Remove the Testset Stabilizer Bracket from the A24 IF Multiplexer Board

Remove the stabilizer bracket as shown in **Figure 1**.

Figure 1 Testset Stabilizer Bracket on A24 IF MUX Board

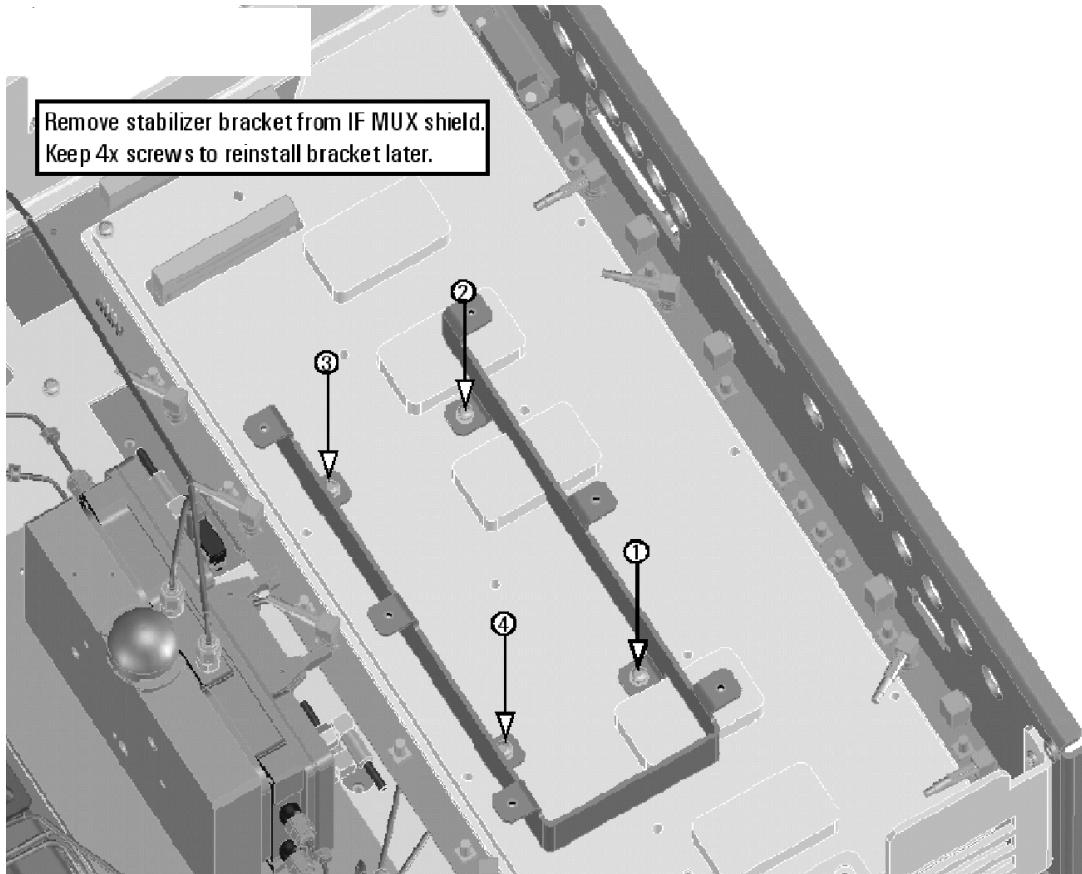

Step 8. Remove Some Bottom-Side (Test Set) Cables

CAUTION

Be careful not to damage the center pins of the semirigid cables. Some flexing of the cables may be necessary but do not over-bend them.

NOTE

When removing a cable, also remove the plastic cable clamp, if present. It is normal for some of the cable clamp's adhesive to remain.

1. Place the analyzer bottom-side up on a flat surface.
2. Remove all bottom-side gray flexible cables and silver semi-rigid cables except those that connect to the rear panel or to the top-side of the PNA. Do not discard the cables (exception: see steps 3 and 4 below) that are removed because some will be reused later in the procedure. To see an image showing the location of cables, click the Chapter 6 bookmark "Bottom RF Cables, 2-Port, Option 201 (S/N Prefixes <6021)" in the PDF Service Guide¹.
3. Remove and discard the following semi-rigid cables:
 - W34 (N5247-20039) A33 port 1 coupler to front panel port 1 CPLR ARM
 - W46 (N5247-20041) A36 port 2 coupler to front panel port 2 CPLR ARM
 - W32 (N5247-20049) Port 1 CPLR THRU to A33 port 1 coupler
 - W44 (N5247-20050) Port 2 CPLR THRU to A36 port 2 coupler
 - W70 (N5247-20100) A25 HMA26.5 to A27 mixer brick
 - W33 (N5247-20056) A29 port 1 reference coupler to A37 reference mixer switch
 - W45 (N5247-20057) A32 port 2 reference coupler to front panel REF 2 SOURCE OUT
4. Remove and discard the following gray flexible cables:
 - W147 (N5242-60025) A27 mixer brick (R1) to A24 IF multiplexer (P601)
 - W148 (N5242-60026) A27 mixer brick (R2) to A24 IF multiplexer (P801)
 - W149 (N5247-60023) A16 SPAM board (J2) to A24 IF multiplexer (P603)
 - W150 (N5247-60024) A16 SPAM board (J5) to A24 IF multiplexer (P203)
5. Leave any remaining gray flexible cables, the wire harnesses, and the ribbon cables connected where possible. Any that are removed should be labeled for reconnection later.


Step 9. Remove the A60 70 GHz Doubler Assembly From the Test Set Deck

Remove the 70 GHz doubler 1 assembly from the test set deck. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A60-A63 70 GHz Doublers” in the PDF Service Guide¹. Keep all parts for re-installation later.

Step 10. Assemble the A61 70 GHz Doubler on the Doubler Mount

1. Follow the instruction in **Figure 2** to install the A61 70 GHz doubler 3 on the doubler mount. New parts are listed in **Table 1 on page 11** of this document.

Figure 2 Installing A61 Doubler 3 on the Doubler Mount (0515-0375, 5087-7336)

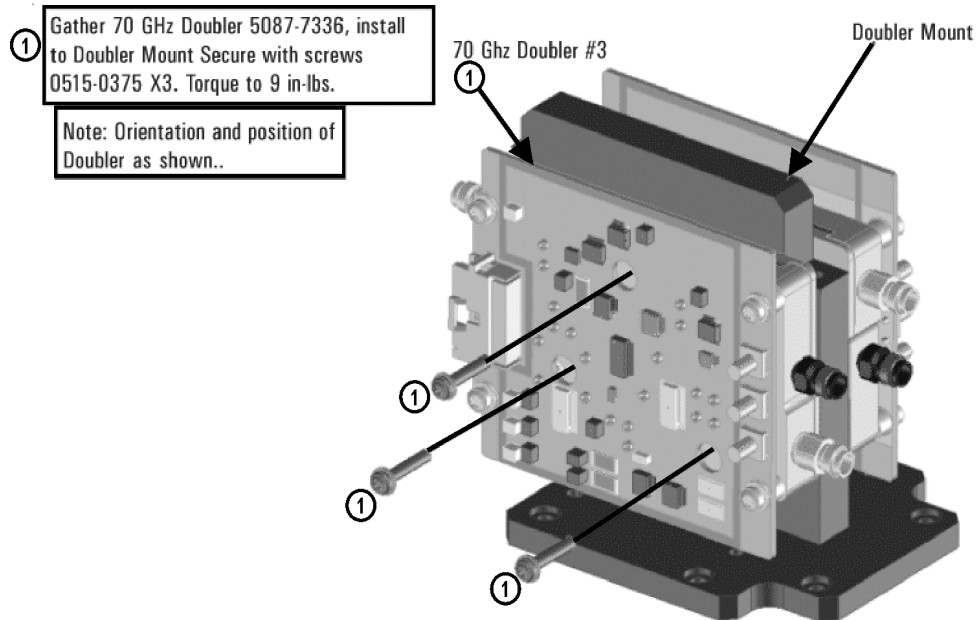

N5247_106_35

2. Connect the cables to the A61 70 GHz doubler 3 in the order shown in **Figure 3**. The other ends of the cables will be connected later.

Figure 3 A61 70 GHz Doubler Assembly (1400-0249, N5247-60010, N5247-60011, N5247-60018)


Note: Orientation of the coax cables.

① Install Coax Cable N5247-60010 to J2 on doubler #3.

② Install Coax Cable N5247-60011 to J4 on doubler #3.

③ Install Ribbon Cable N5247-60018 to doubler #3 as shown.

④ Add tie wrap, 1400-0249 to keep cable ends together.

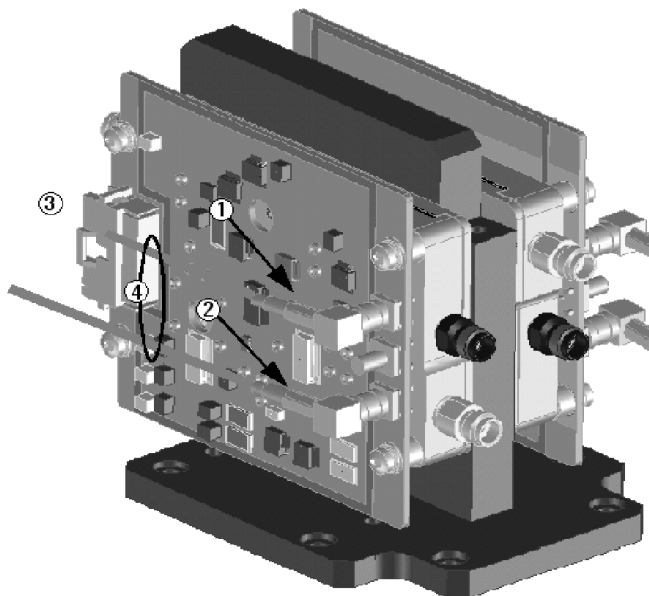

Step 11. Reinstall the A60/A61 70 GHz Doubler Assembly

Reinstall the A60 70 GHz doubler 1 cables, and then reinstall the A60/A61 70 GHz doubler assembly on the test set deck, reusing the existing screws. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A60-A63 70 GHz Doublers” in the PDF Service Guide¹.

Step 12. Remove the A63 70 GHz Doubler Assembly From the Test Set Deck


Remove the A63 70 GHz doubler 2 assembly from the test set deck. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A60-A63 70 GHz Doublers” in the PDF Service Guide¹. Keep all parts for re-installation later.

1. See [“Downloading the Online PNA Service Guide” on page 9](#).

Step 13. Assemble the A62 70 GHz Doubler on the Doubler Mount

1. Follow the instruction in **Figure 4** to install the A62 70 GHz doubler 4 on the doubler mount. New parts are listed in **Table 1 on page 11** of this document.

Figure 4 Installing A62 Doubler 4 on the Doubler Mount (0515-0375, 5087-7336)

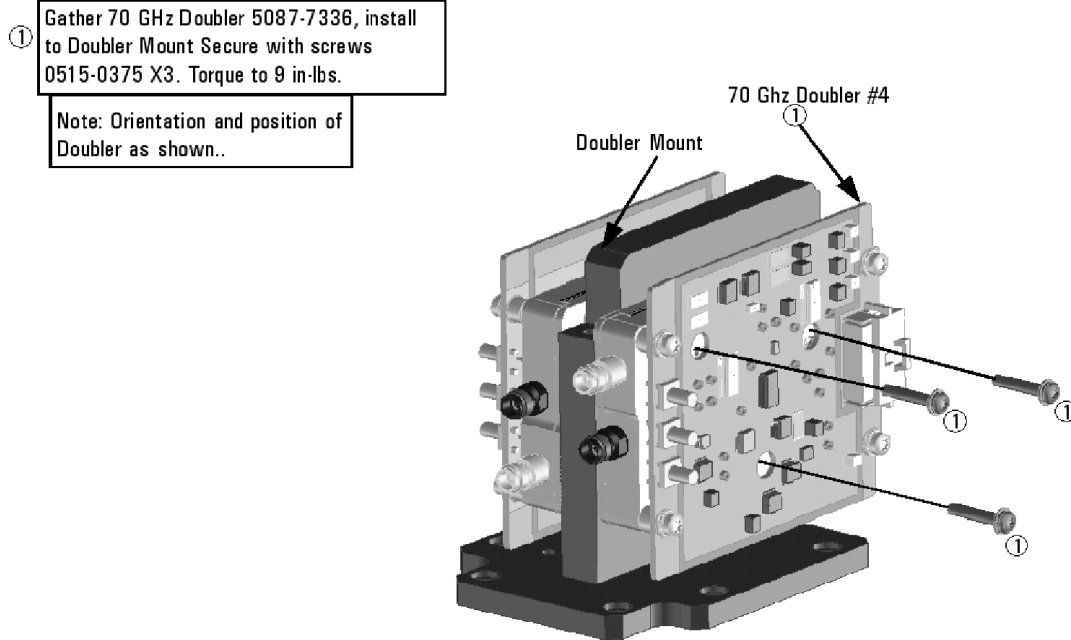


2. Connect the cables to the A62 70 GHz doubler in the order shown in **Figure 5**. The other ends of the cables will be connected later.

Figure 5 A62 70 GHz Doubler Assembly (1400-0249, N5247-60012, N5247-60013, N5247-60018)

Note: Orientation of the coax cables.

- ① Install Coax Cable N5247-60012 to J2 on doubler #4.
- ② Install Coax Cable N5247-60013 to J4 on doubler #4.
- ③ Install Ribbon Cable N5247-60018 to doubler #4 as shown.
- ④ Add tie wrap, 1400-0249 to keep cable ends together.

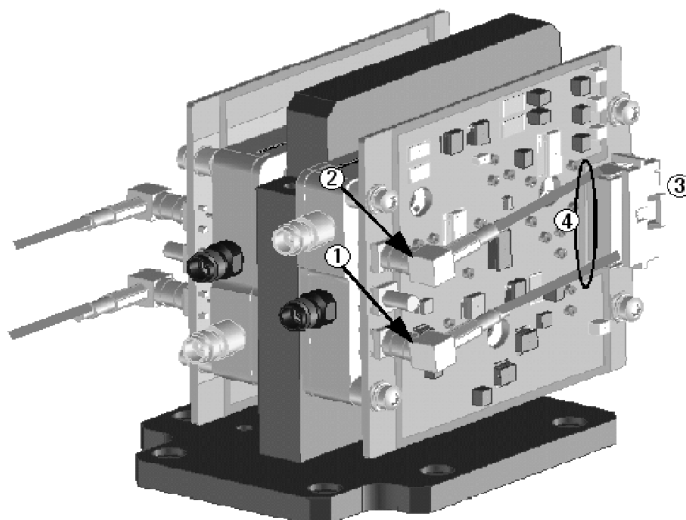

Step 14. Reinstall the A62/A63 70 GHz Doubler Assembly


Reinstall the A63 70 GHz doubler 2 cables, and then reinstall the A62/A63 70 GHz doubler assembly on the test set deck, reusing the existing screws. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A60-A63 70 GHz Doublers” in the PDF Service Guide¹.

1. See [“Downloading the Online PNA Service Guide” on page 9](#).

Step 15. Install Bracket to A10 Source Assembly

Follow the two instructions shown in **Figure 6**.


Figure 6 A10 Source 2 Assembly Bracket Installation (0515-0375, 0515-0666, 0515-2078, 5087-7780, N5247-20136)

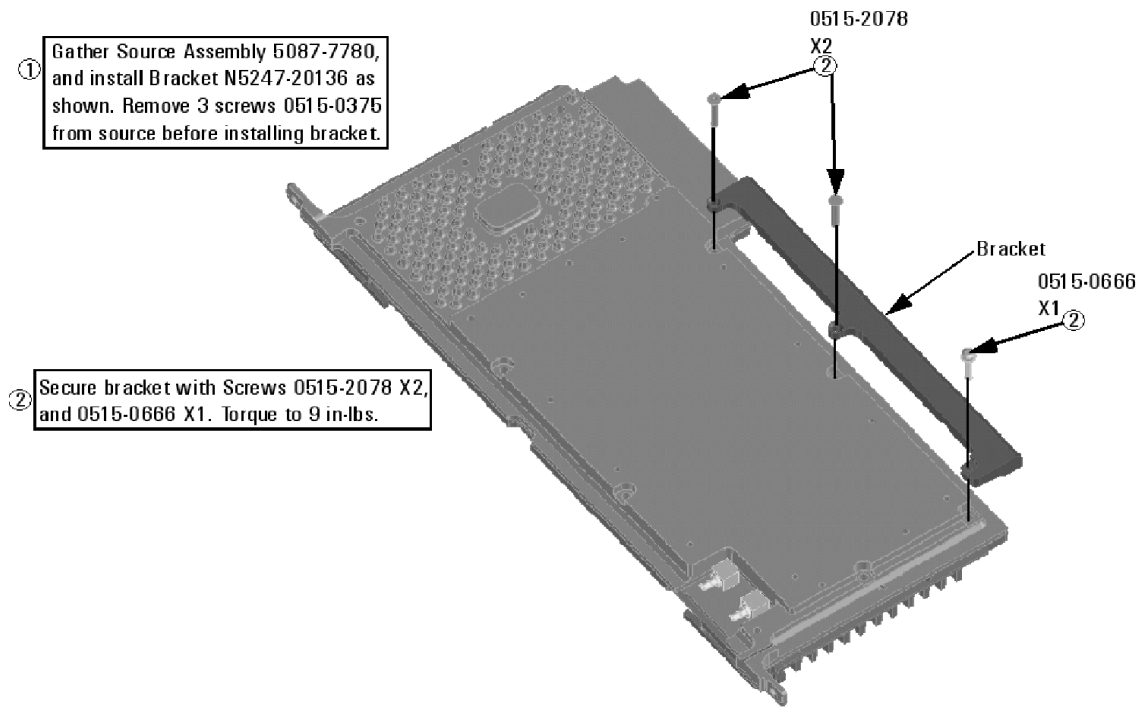

Step 16. Assemble the A10 26.5 GHz Source 2 Assembly

Follow the four instructions shown in **Figure 7**.


Figure 7 A10 Source 2 Assembly (5087-7780, N5245-20032, N5245-20034, N5247-20125)

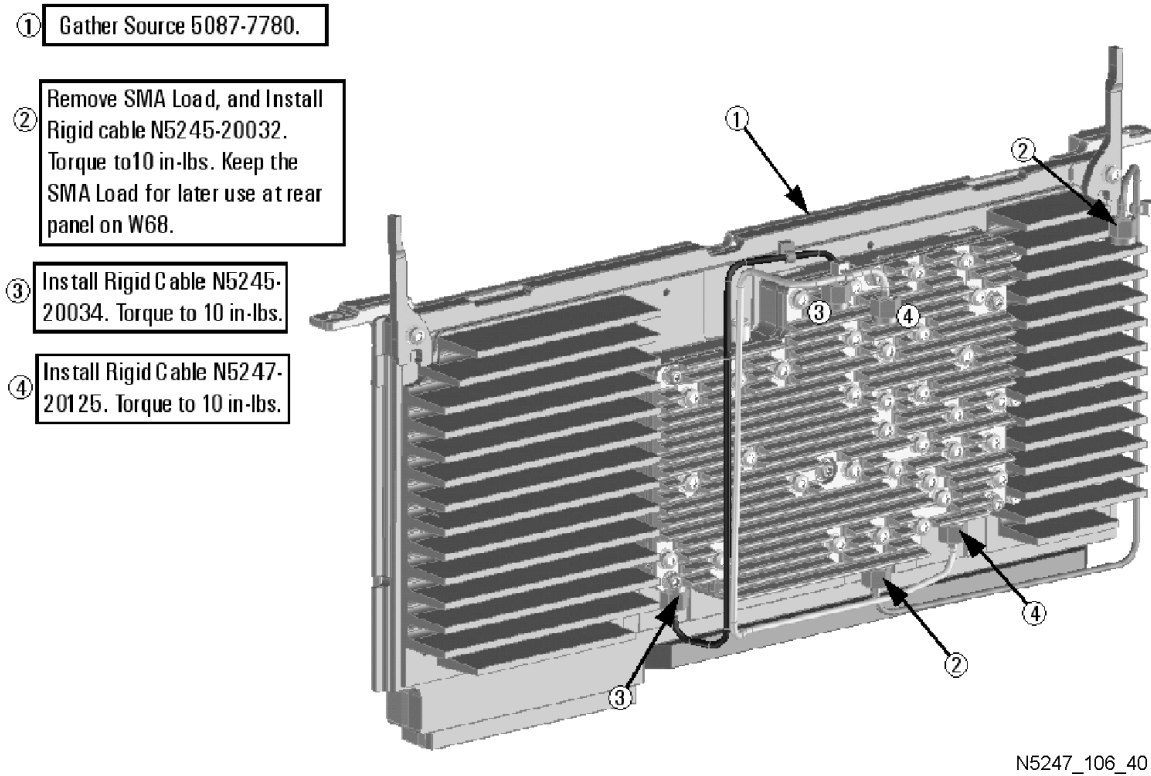

Step 17. Assemble and Install the A12 40 GHz Doubler Assembly

Follow the five instructions shown in **Figure 8**.

Figure 8 A12 40 GHz Doubler 3 Assembly Installation (1250-4261, 5087-7346, N5247-20086, N5247-20096, N5247-20114)

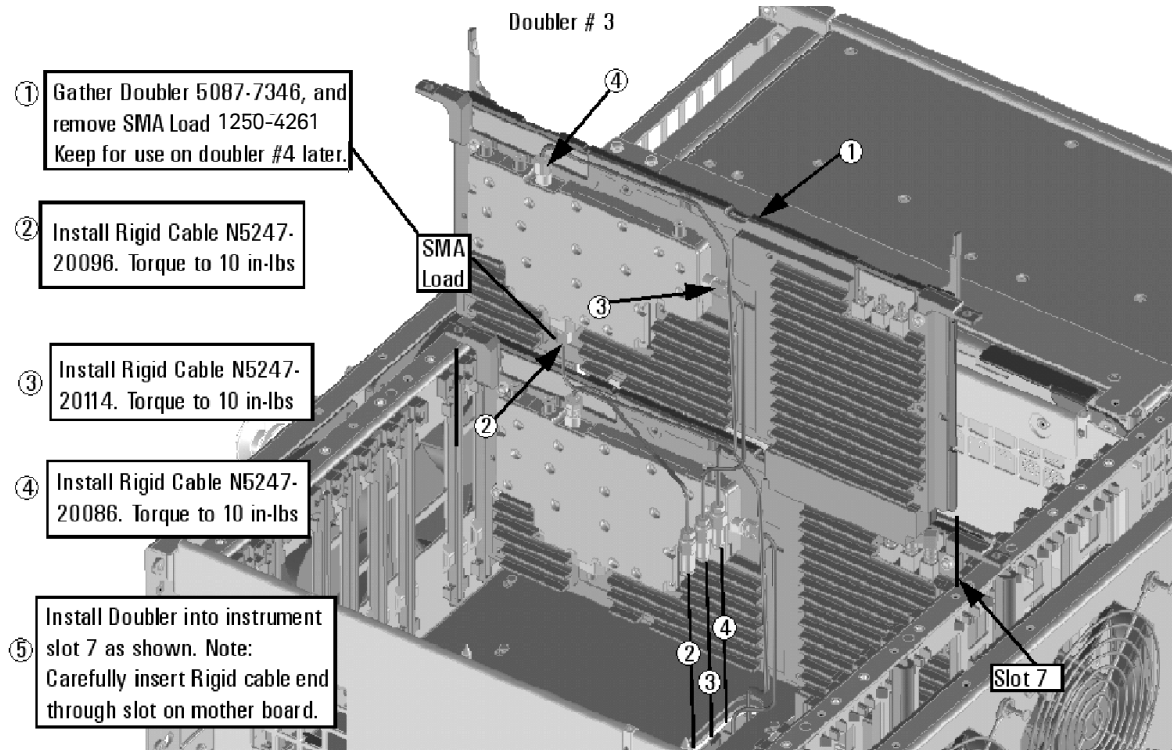


N5247_106_41

Step 18. Install the A12 40 GHz Doubler Cables

Follow the three instructions shown in **Figure 9**.


Figure 9 A12 40 GHz Doubler 3 Assembly Cable Installation (N5247-60010, N5247-60011)

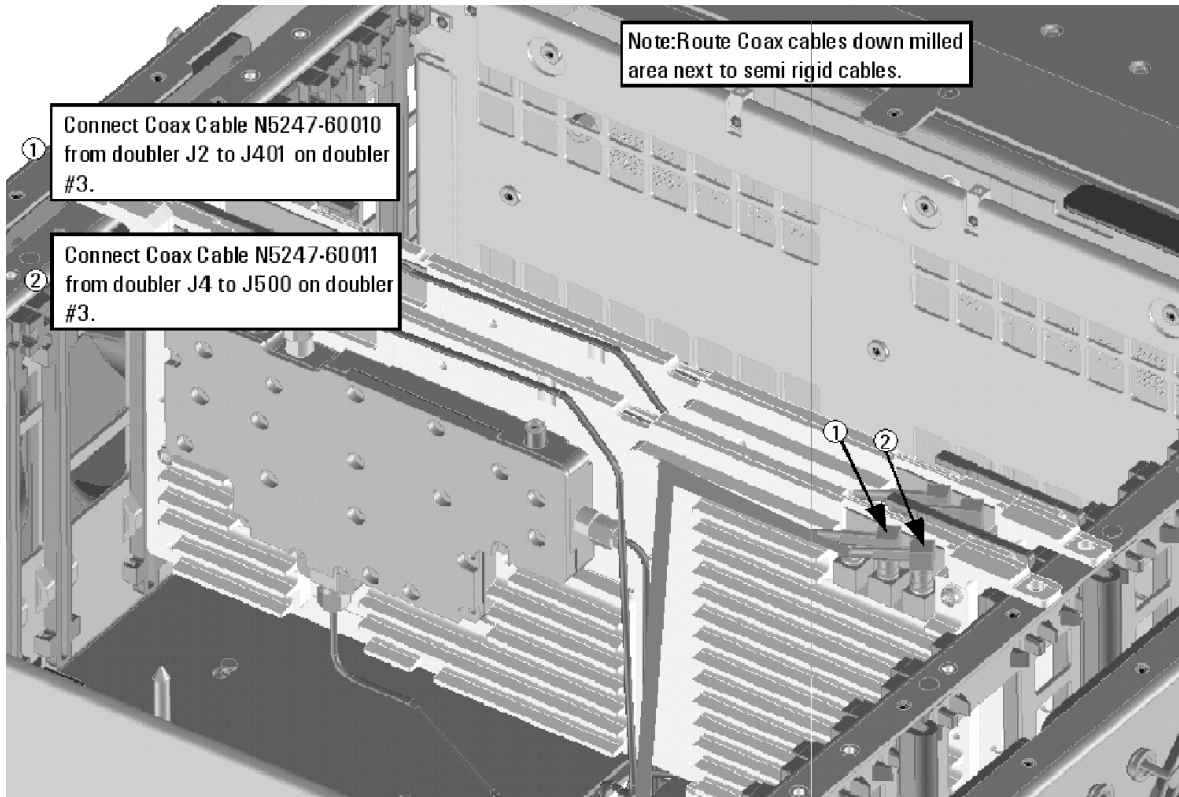

Step 19. Assemble and Install the A13 40 GHz Doubler Assembly

Follow the five instructions shown in **Figure 10**.


Figure 10 A13 40 GHz Doubler 4 Installation (5087-7346, N5247-20086, N5247-20114)

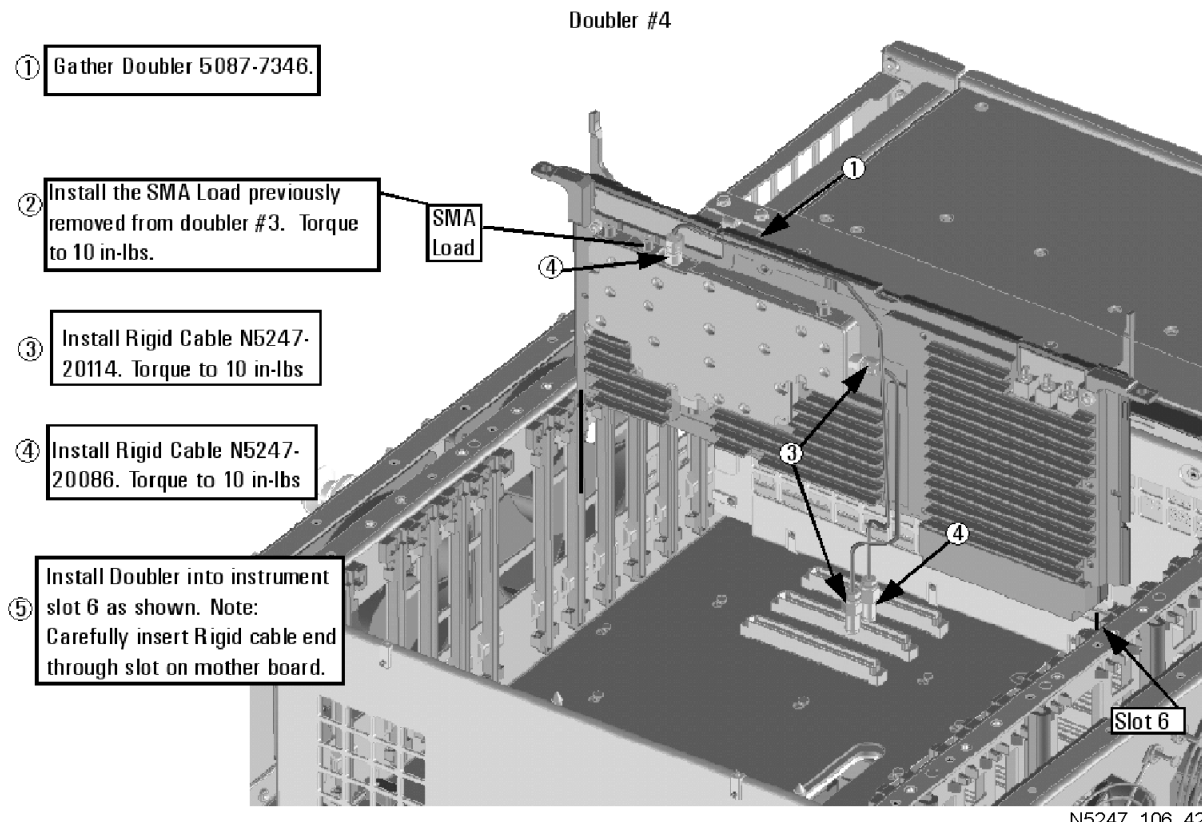

Step 20. Install the A13 40 GHz Doubler Cables

Follow the three instructions shown in **Figure 11**.

Figure 11 A13 40 GHz Doubler 4 Cable Installation (N5247-60012, N5247-60013)

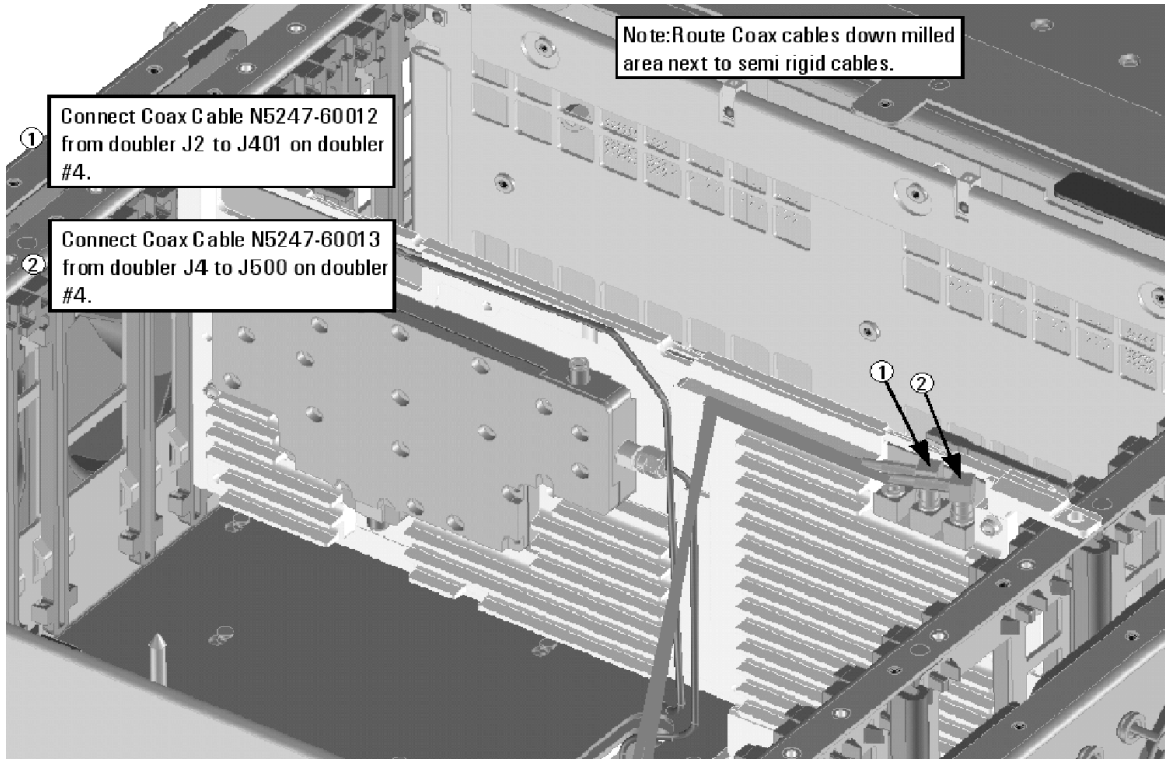


N5247_106_43

Step 21. Install the A10 26.5 GHz Source 2 Assembly and Cables

Follow the four instructions shown in **Figure 12**.

Figure 12 A10 Source 2 Assembly Installation (0515-0380, N5245-20033)

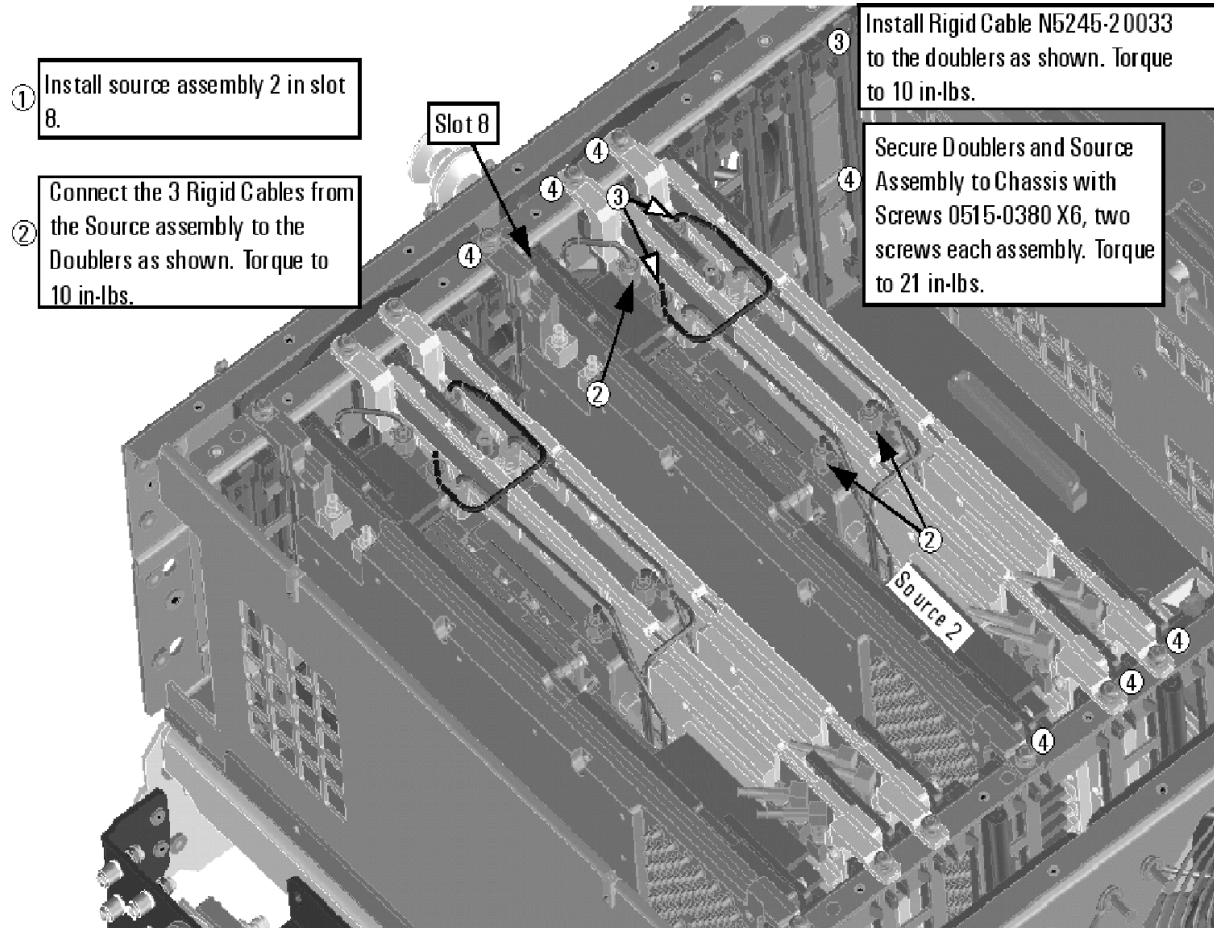


Step 22. Install the A17 13.5 GHz (Source 2) Synthesizer Board and Cables

1. Install new gray cable W87 (N5242-60030) to connector J5 of the new A17 (source 2) synthesizer board (N5240-60074). The loose end of the cable will be connected on the A14 frequency reference board (J7) after the A17 board has been installed in the analyzer.
2. Install the A17 board into slot 2 in the motherboard. Secure the board into the chassis using two screws (0515-0380). To see an image showing the location of the A17 board in the motherboard, click the Chapter 6 bookmark “Top Assemblies, All Options” in the PDF Service Guide¹.
3. Connect cable W2 (N5245-20100) between the A10 source 2 board and the A17 (source 2) synthesizer board, positioning the cable in the wire looms. Tighten the cable connectors to 10 in-lbs using a 5/16-in torque wrench.
4. Connect the loose end of new gray flex cable W87 (N5242-60030) on the A14 frequency reference board (J7). (The other end of this cable was previously connected to J5 of the source 2 synthesizer board.)

Step 23. Install the Cable Bracket Mount

1. Follow the two instructions shown in **Figure 13**. New parts are listed in **Table 1 on page 11** of this document.

Figure 13 Cable Bracket Mount Installation (0515-0374, N5247-00006)

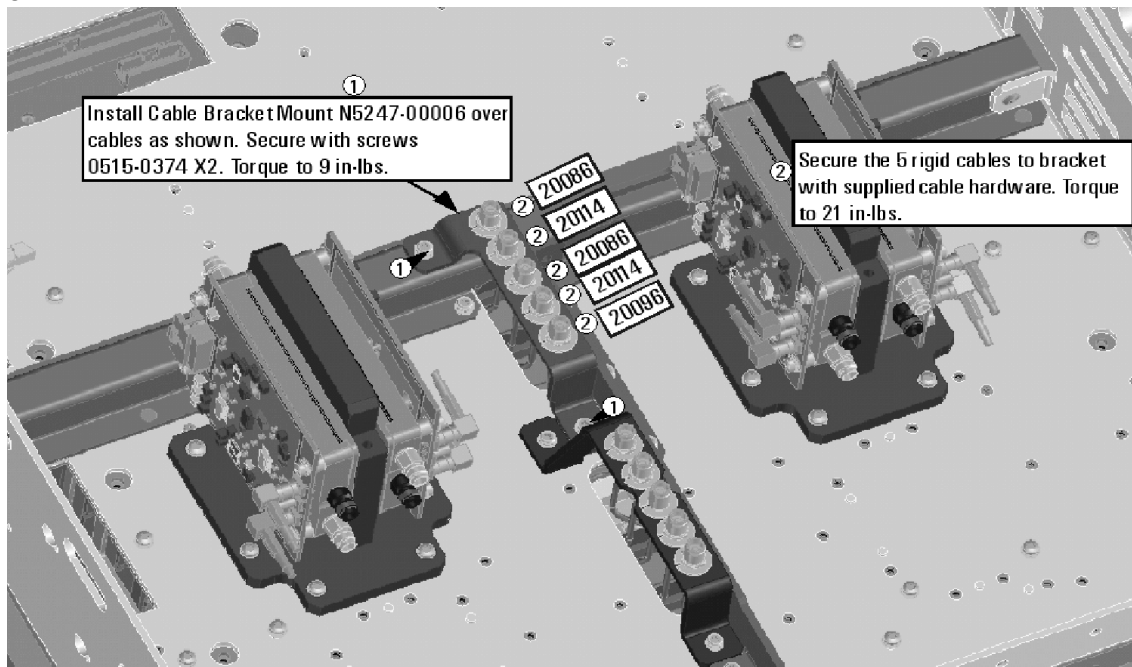

1. See [“Downloading the Online PNA Service Guide” on page 9](#).

Step 24. Remove the A27 Mixer Brick Assembly


Remove the A27 mixer brick assembly from the PNA. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A27 and A28 Mixer Bricks” in the PDF Service Guide¹.

Step 25. Assemble the A28 Mixer Brick Assembly

1. Follow the instruction shown in **Figure 14**. New parts are listed in **Table 1 on page 11** of this document.

Figure 14 A28 Mixer Brick Assembly (0515-1038, 5087-7337)

- 1** Install A28 mixer brick 5087-7337 to mounting block using screws 0515-1038. Torque to 9 in-lbs.

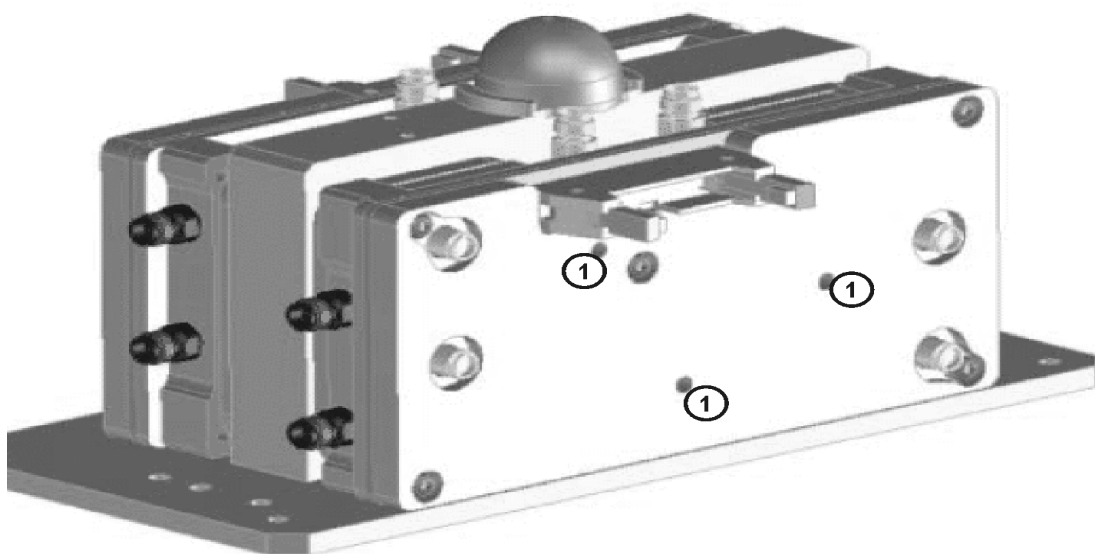

N5247_106_17

1. See “[Downloading the Online PNA Service Guide](#)” on page 9.


2. Follow the instructions shown in **Figure 14-1**.

Figure 14-1 A26 Splitter, A69 3 dB Pad, and Dust Cap Installation (0515-2007, 5067-4086, 08490-60037, N5247-20138)

① Install splitter 5067-4086 (label facing up), secure with screws 0515-2007 X2. Leave loose for now.

② Install 3dB pad 08490-60037 X1 only on R4 connector of A28 mixer brick. Torque to 10 in-lbs.


③ Add dust cap N5247-20138 X1 (not shown) to L-Brick.

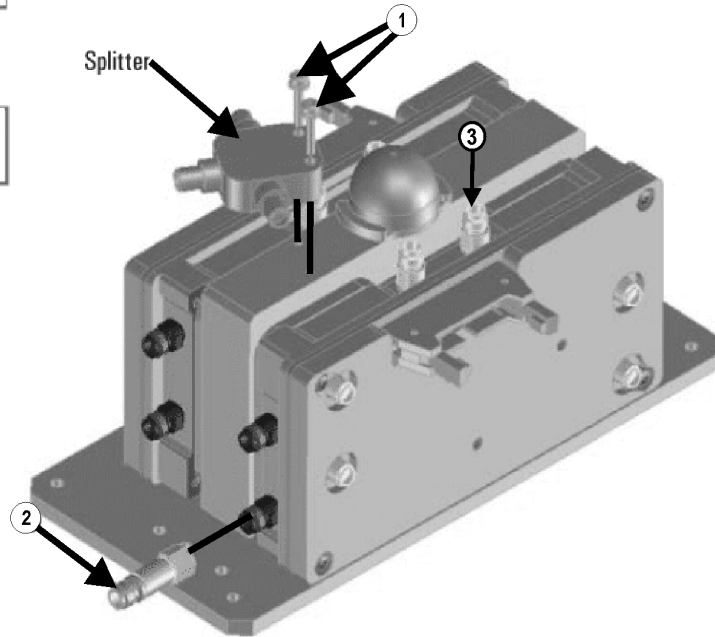

N5247_106_18

3. Connect the gray flexible cables to the A28 mixer in the order shown in **Figure 14-2**. The other ends of the cables will be connected when the IF board is reinstalled later.

Figure 14-2 A28 Mixer Brick Cable Installation (N5242-60019, N5242-60020, N5242-60023, N5242-60024)

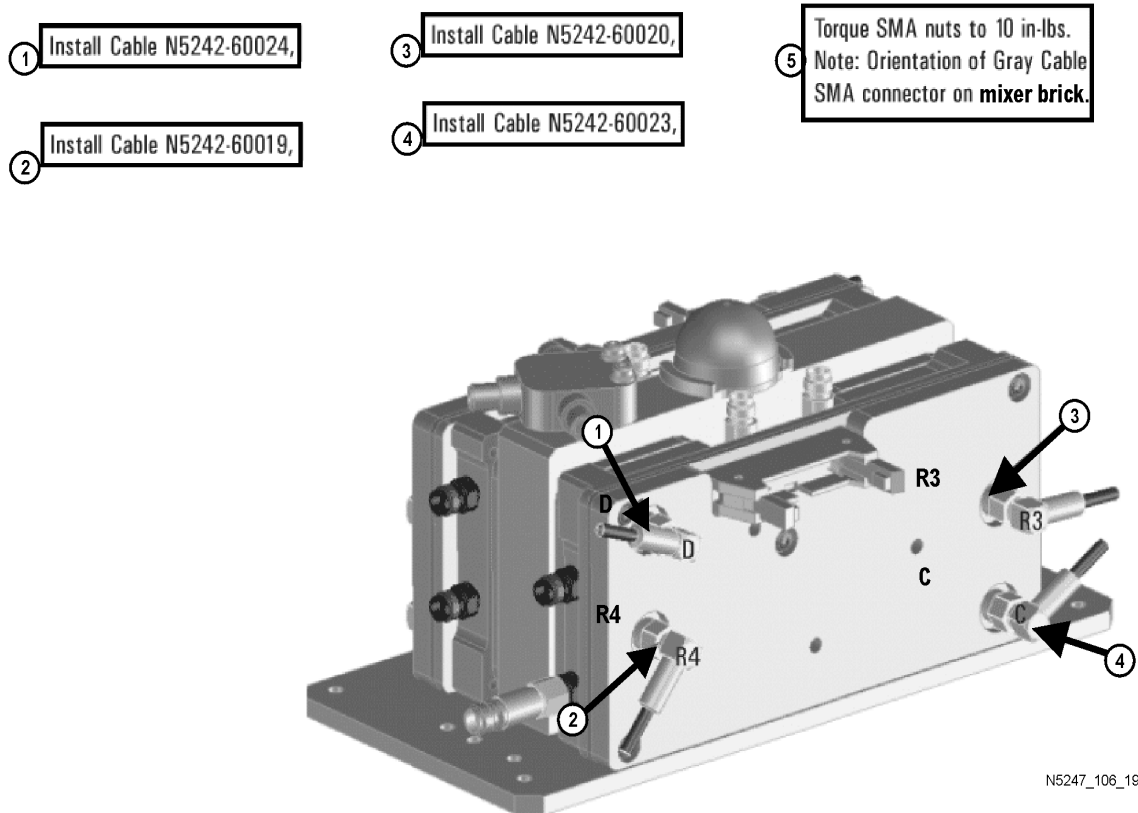

Step 26. Install the A27/A28 Mixer Brick Assemblies

Reinstall the A27 mixer brick cables, and then install the A27/A28 mixer brick assembly, reusing the 10 existing screws. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A27 and A28 Mixer Bricks” in the PDF Service Guide¹. New parts are listed in **Table 1 on page 11** of this document.

1. See “[Downloading the Online PNA Service Guide](#)” on page 9.

Step 27. Assemble the A30 and A31 Receiver Coupler Assemblies

Follow the instructions shown in **Figure 15** and **Figure 16**. New parts are listed in **Table 1 on page 11** of this document.

Figure 15 A30 Receiver Coupler Assembly (0403-0179, 0515-0658, 5087-7744, N5247-00011)


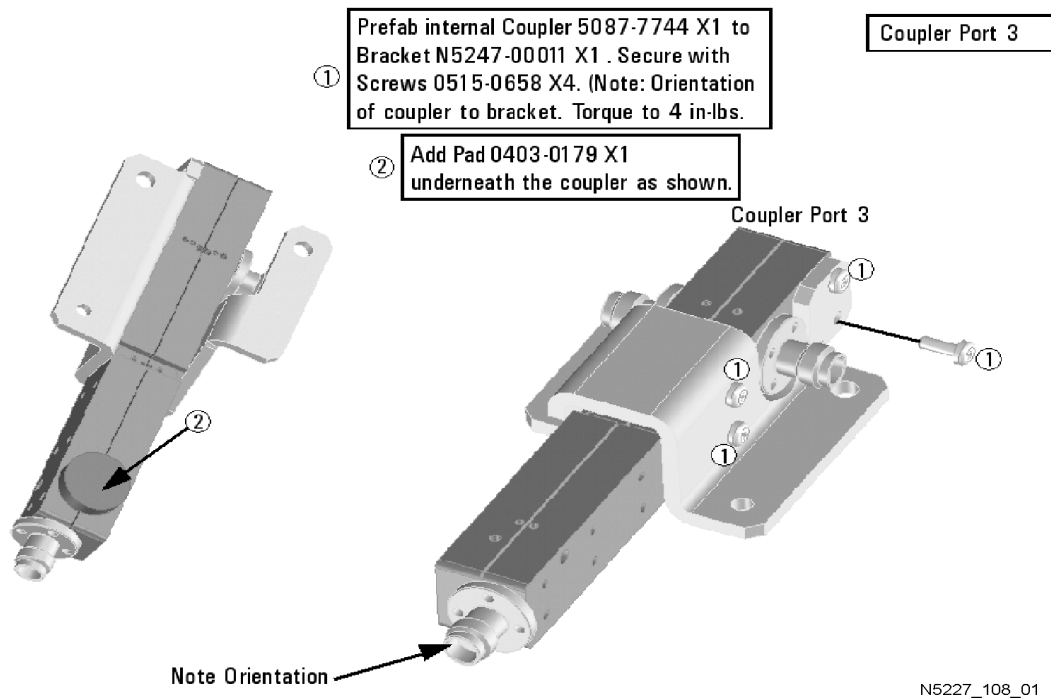


Figure 16 A31 Receiver Coupler Assembly (0403-0179, 0515-0658, 5087-7744, N5247-00012)

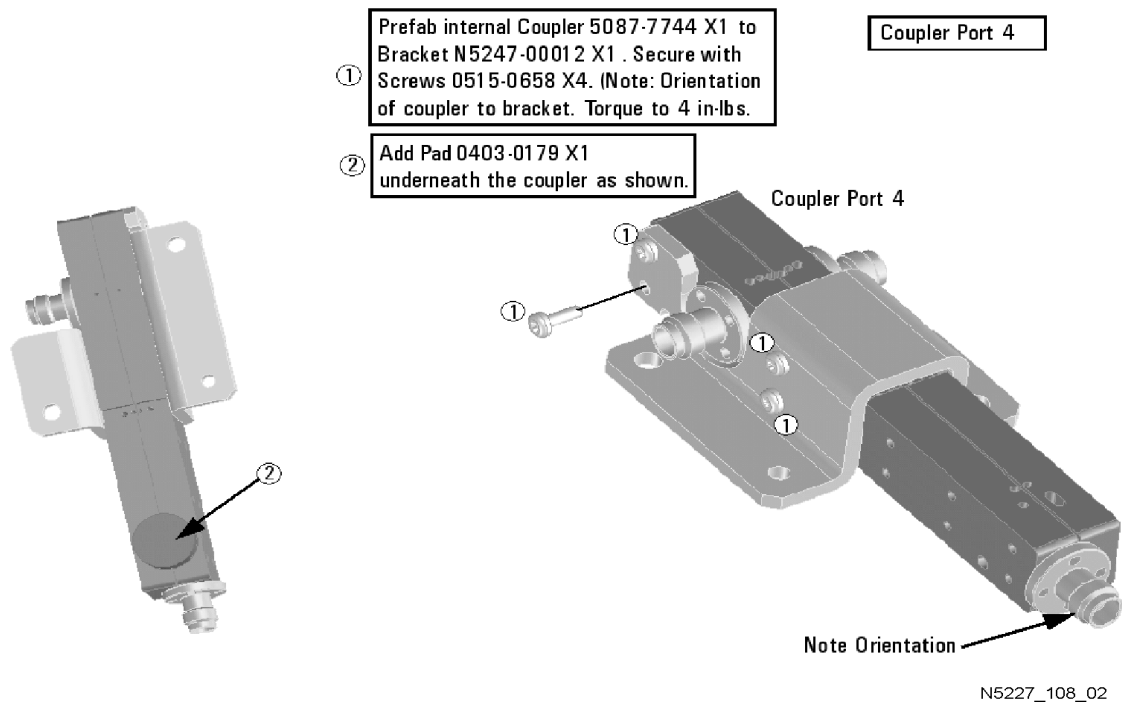


Step 28. Install the A30 and A31 Receiver Coupler Assemblies

Install the A30 and A31 receiver coupler assemblies using three 0515-0372 screws to secure each bracket. For instructions, click the Chapter 7 bookmark, “Removing and Replacing the A29-A32 receiver couplers and receiver coupler Mounting Brackets” in the PDF Service Guide¹. New parts are listed in **Table 1 on page 11** of this document.

Refer to **Figure 17** below for the location of the receiver coupler assemblies.

Figure 17 Location of Attenuator Assemblies and Receiver Coupler Assemblies

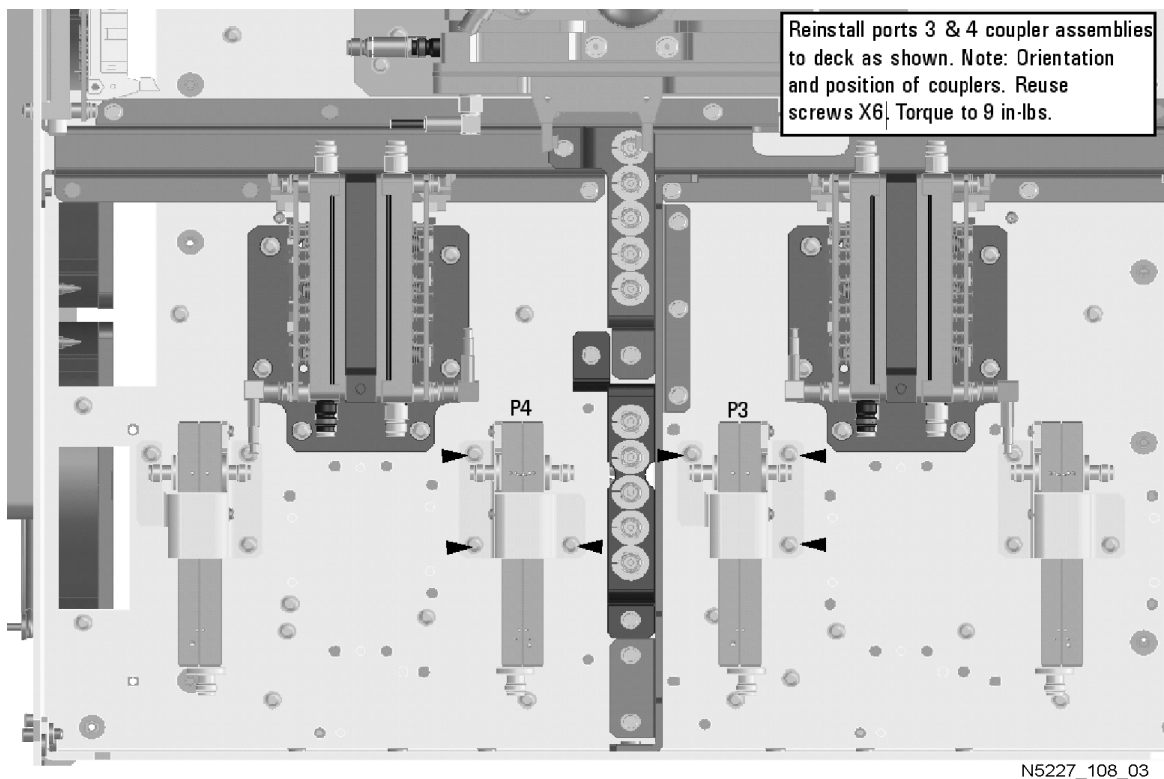

N5227_108_03


1. See **“Downloading the Online PNA Service Guide” on page 9.**

Step 29. Assemble the A33 - A36 Test Port Coupler Assemblies

1. Remove the A33 test port 1 coupler and A36 test port 2 coupler from the PNA. For instructions, click the Chapter 7 bookmark, "Removing and Replacing the A33 - A36 Test Port Couplers" in the PDF Service Guide¹.
2. Using pliers, remove the adhesive bumper on the A33 test port 1 coupler and on the A36 test port 2 coupler.
3. Follow the two instructions shown in **Figure 18**. New parts are listed in **Table 1 on page 11** of this document.

Figure 18

A33 - A36 Test Port Coupler Assembly (0460-2725, 5087-7778, E4403-20033)

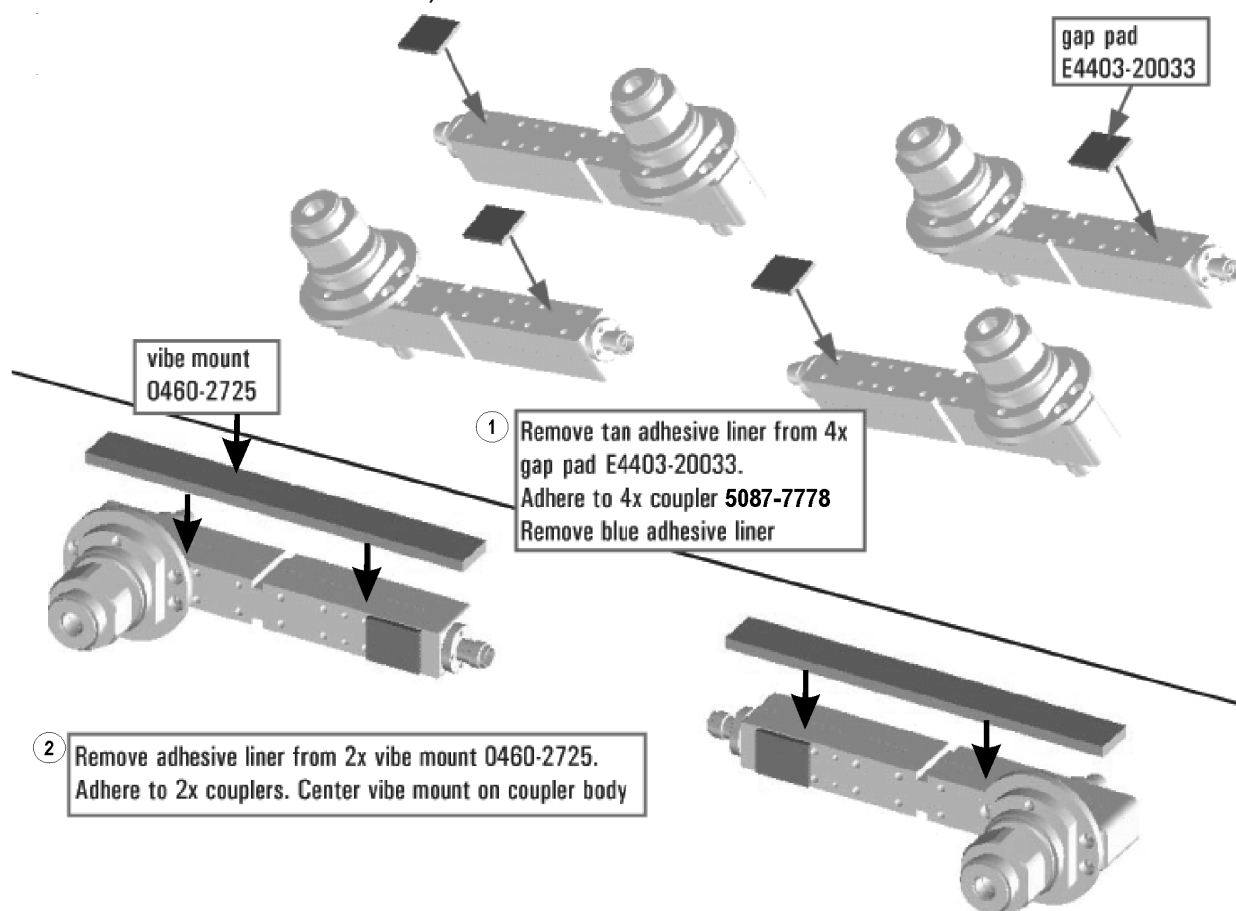

N5247_106_11

1. See ["Downloading the Online PNA Service Guide" on page 9](#).


Step 30. Remove and Disassemble the 2-Port Test Set Front Plate

1. Remove two screws from each LED board and remove the boards from the 2-port test set front plate of the PNA. Keep the screws for re-installation later.
2. Remove the 2-port test set front plate from the test set deck. Keep the screws to reuse later.
3. Remove the 12 bulkhead connectors, nuts and washers from the 2-port front plate to reuse later.

Step 31. Install the LED Boards and Test Port Coupler Assemblies to the 4-Port Test Set Front Plate

1. Follow the three instructions shown in **Figure 19**.

Figure 19 LED Board Assemblies and Test Port Coupler Assemblies Installation (0515-1521, 5022-1087, 5087-7778, N5240-60058, N5247-60016)

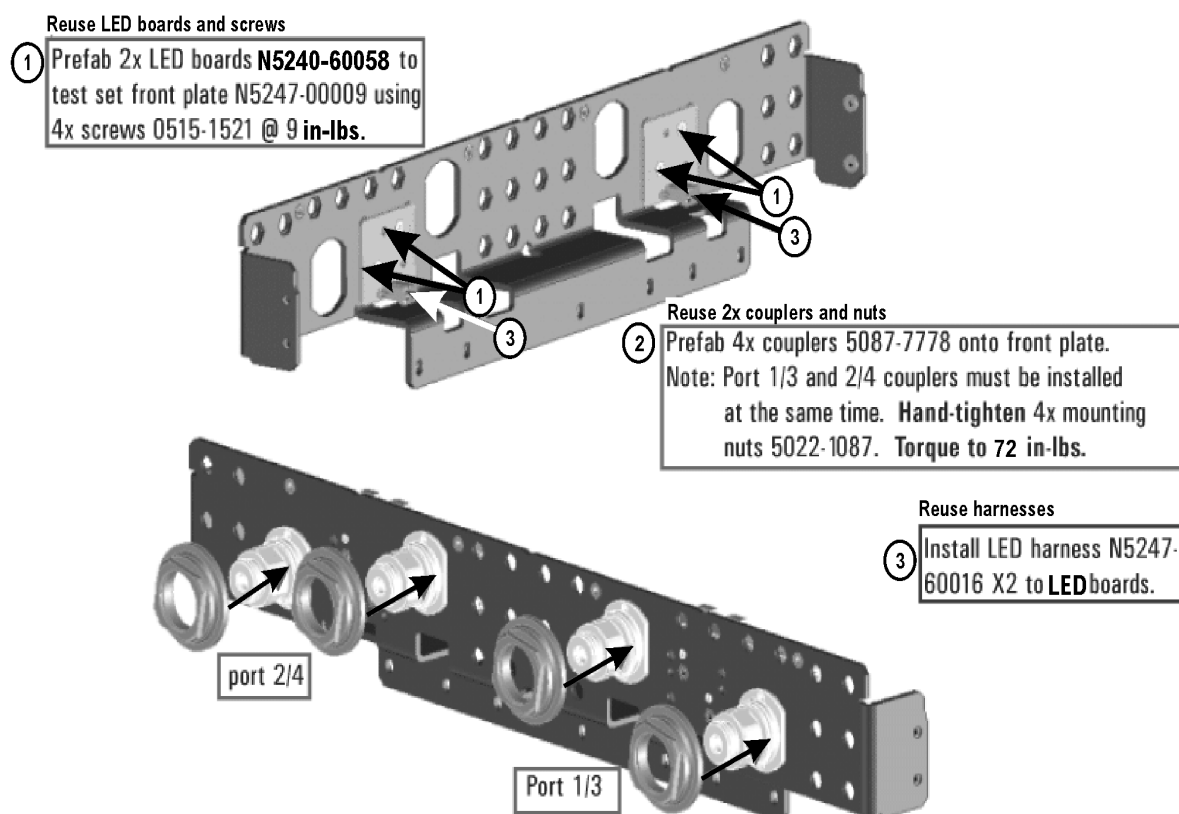


N5247_106_12

Step 32. Install the Bulkhead Connectors in the Test Set Front Plate

Refer to **Figure 20** for this procedure. New parts are listed in **Table 1 on page 11**.

1. Locate the bulkhead connectors you removed earlier from the 2-port test set front plate of the PNA. Use these and the new bulkhead connectors included in the kit for the remainder of this step.
2. From the back side of the test set front plate, insert a bulkhead connector into a hole in the plate.
3. Install 1x washer and 1x nut. Hand tighten nut and ensure bulkhead connector hexagon nut, on the back side of test set front plate, is aligned to the test set subpanel hexagon indent.
4. Repeat previous two steps for the remaining bulkhead connectors.
5. Torque nuts, on the front side of test set front plate, to 21 in-lbs.

Figure 20 Bulkhead Connectors Installation

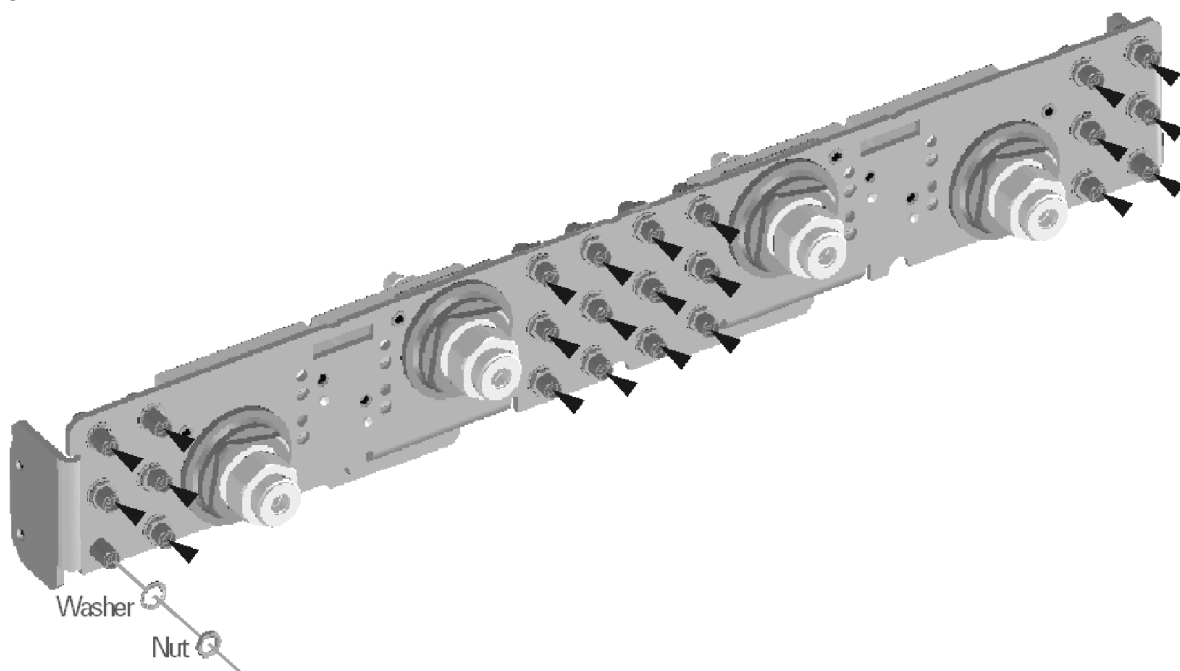

N5242_004_09

Step 33. Install the 4-Port Coupler Plate Assembly to the Deck

Follow the three instructions shown in **Figure 21**.

Figure 21 Coupler Plate Assembly Installation (0515-0372, 0515-0664, 0515-1227)


Reuse screws

① Install coupler plate assy to deck. Install 6x screws 0515-0372 and 1X 0515-0664. Do not torque.

② Install 4x screws 0515-1227 at 9 in-lbs. Alternate sides in torque sequence as shown in alphabetic circles.

Reuse screws

③ Torque the 7x screws in step 1 to 9 in-lbs.

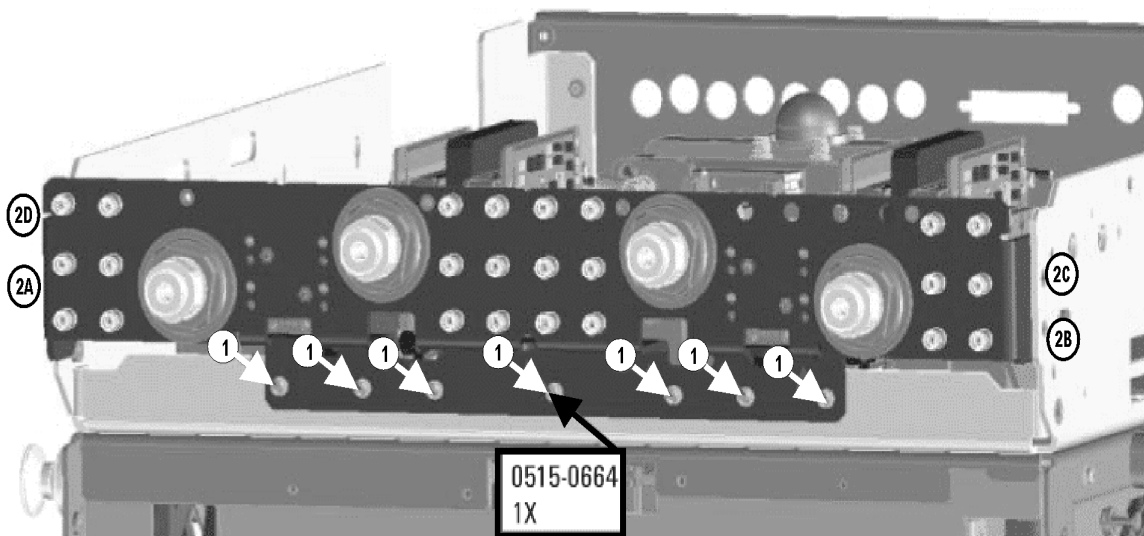

N5247_106_13

Step 34. Install Some Bottom-Side (Test Set) Cables

CAUTION

Use a 5/16-in torque wrench set to 10 in-lbs on all cable connections except the front and rear panel bulkhead connectors. On these, use a 9 mm nutsetter or open end torque wrench set to 21 in-lb.

CAUTION

Be careful not to damage the center pins of the semirigid cables. Some flexing of the cables may be necessary but do not over-bend them.

CAUTION

Follow instructions carefully when making cable connections, especially wire harness connections. Incorrect connections can destroy components, resulting in additional customer costs.

Flexible Cables Required for Upgrading to an Option 401 PNA

Install the following gray flexible cables in the order listed. 70 GHz cables were connected to the 70 GHz doublers earlier in this procedure, but the other end of these cables still requires a connection. To see images showing the location of these cables, click either of the Chapter 6 bookmarks “Bottom RF Cables, 4-Port, Option 401” in the PDF Service Guide¹. New parts are listed in **Table 1 on page 11**.

- W91 (reuse) (N5247-60006) A60 port 1 70 GHz doubler (J2) to A7 40 GHz doubler (J401)
- W92 (reuse) (N5247-60007) A60 port 1 70 GHz doubler (J4) to A7 40 GHz doubler (J500)
- W97 (reuse) (N5247-60008) A63 port 2 70 GHz doubler (J2) to A8 40 GHz doubler (J401)
- W98 (reuse) (N5247-60009) A63 port 2 70 GHz doubler (J4) to A8 40 GHz doubler (J500)

Semirigid Cables Required for Upgrading to an Option 401 PNA

To see images showing the location of these cables, click the Chapter 6 bookmark “Bottom RF Cables, 4-Port, Option 401, S/N Prefixes <6021” in the PDF Service Guide¹. New parts are listed in **Table 1 on page 11**.

- W69 (reuse) (N5247-20112) A27 mixer brick to rear-panel EXT TSET DRIVE LO OUT (J5)
- W68 (N5247-20088) rear panel port RF2 OUT (J12) to W67
* Install SMA load previously removed from A10 26.5 GHz source board onto rear panel port RF2 OUT (J12).
- W50 (reuse) (N5247-20054) Port 2 RCVR B IN to A27 mixer brick (B)
- W44 (N5247-20018) Port 2 CPLR THRU to A36 port 2 coupler


1. See **“Downloading the Online PNA Service Guide” on page 9**.

Installation Procedure for the Upgrade

- W46 (N5247-20019) A36 port 2 coupler to port 2 CPLR ARM
- W43 (reuse) (N5247-20036) A32 port 2 receiver coupler to front-panel port 2 SOURCE OUT
- W40 (N5247-20017) Port 4 CPLR THRU to A35 port 4 coupler
- W45 (N5247-20076) A32 port 2 receiver coupler to front-panel REF 2 SOURCE OUT

* As shown in **Figure 22**, install two clamps, part number 1400-1334, to secure W45.

Figure 22 Location of Cable Clamps to Secure W45 (0403-1334, N5247-20076)

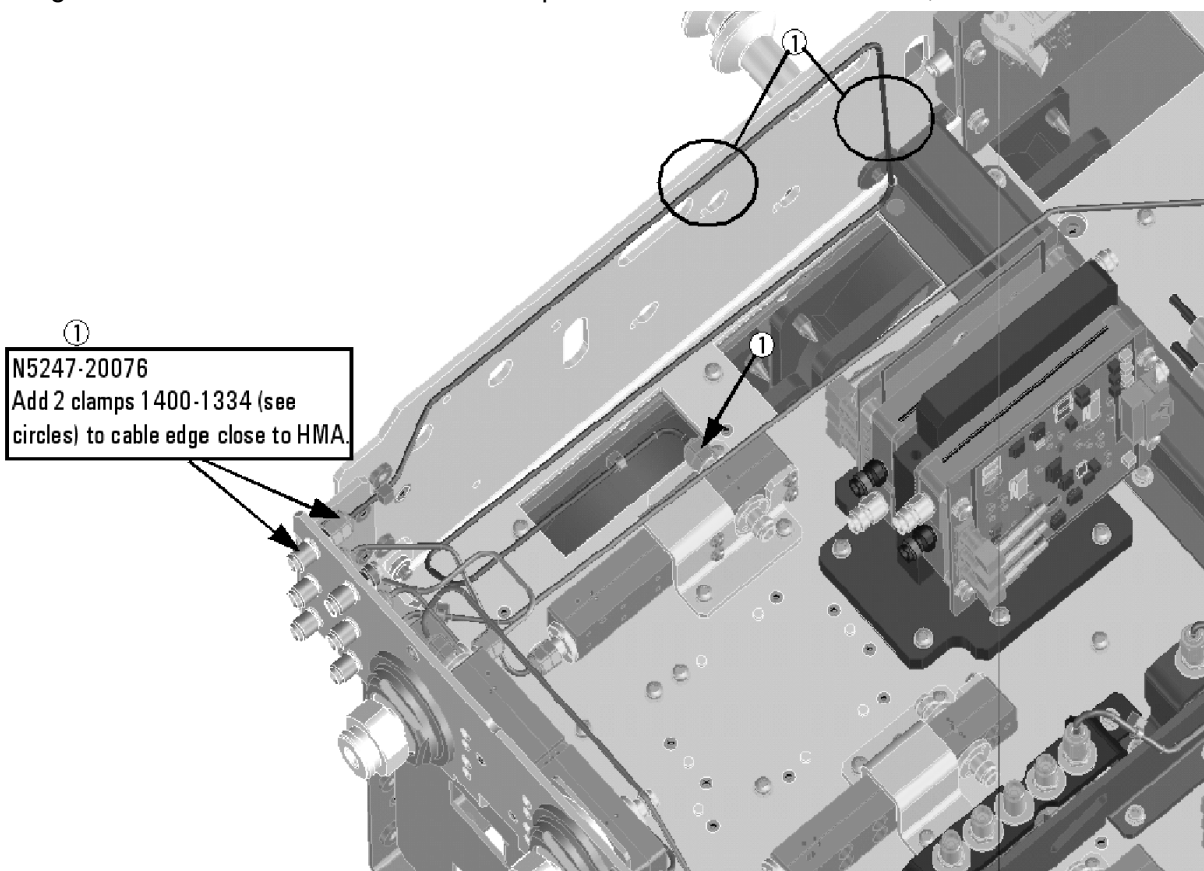

N5227_108_04


- W56 (reuse) (N5247-20055) REF 2 RCVR R2 IN to A27 mixer brick (R2)
- W55 (N5247-20067) A28 mixer brick (R4) to REF 4 RCVR R4 IN
- W49 (N5247-20073) Port 4 RCVR D IN to A28 mixer brick (D)
- W42 (N5247-20026) A35 port 4 coupler to port 4 CPLR ARM
- W39 (N5247-20035) A31 port 4 receiver coupler to front-panel port 4 SOURCE OUT

Installation Procedure for the Upgrade

- W41 (N5247-20075) A31 port 4 receiver coupler to front-panel REF 4 SOURCE OUT

* As shown in **Figure 23**, install clamp, part number 1400-1334, to secure W41.

Figure 23 Location of Cable Clamp to Secure W41 (1400-1334, N5247-20075)

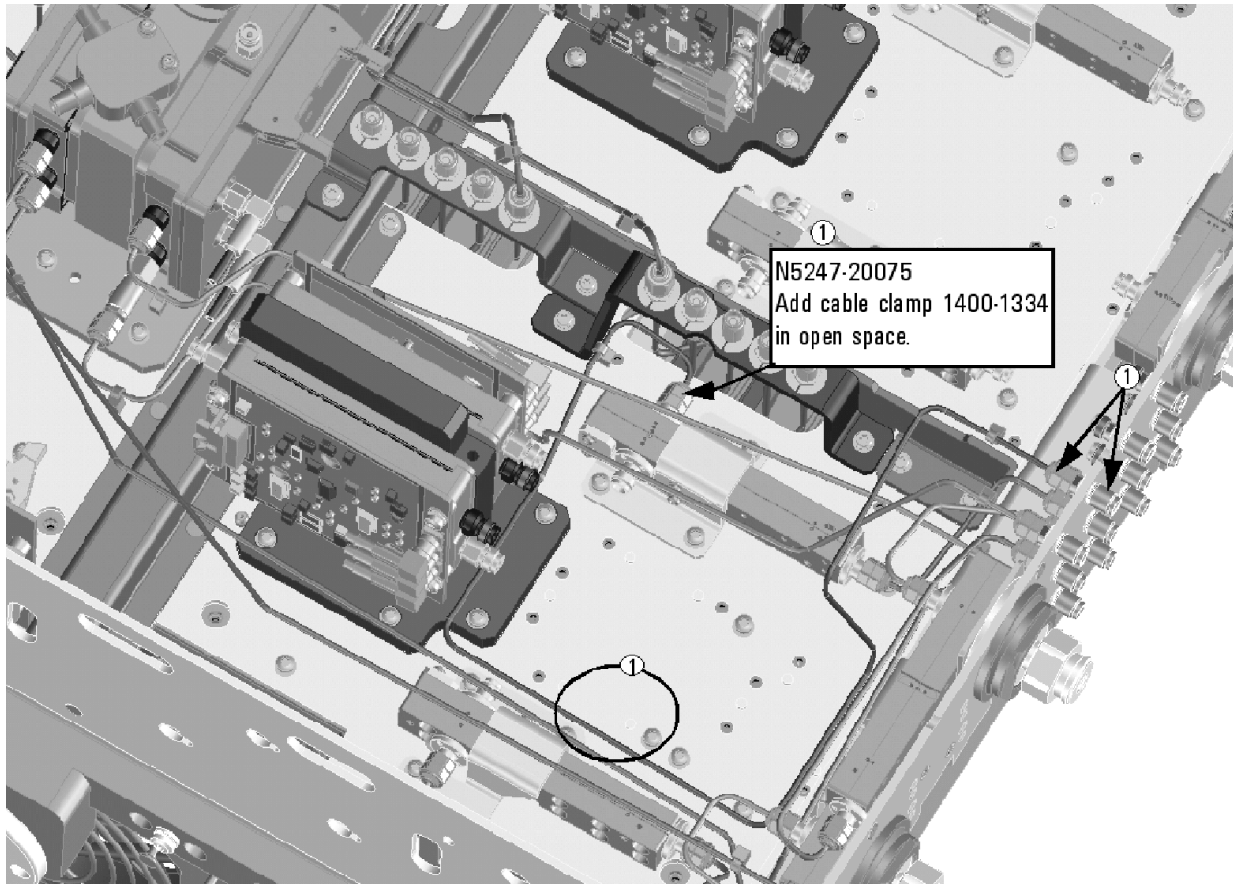


N5227_108_05

- W37 (N5247-20077) A30 port 3 receiver coupler to front-panel REF 3 SOURCE OUT

* As shown in **Figure 24**, install clamp, part number 1400-1334, to secure W37.

Figure 24 Location of Cable Clamp to Secure W37 (1400-1334, N5247-20077)

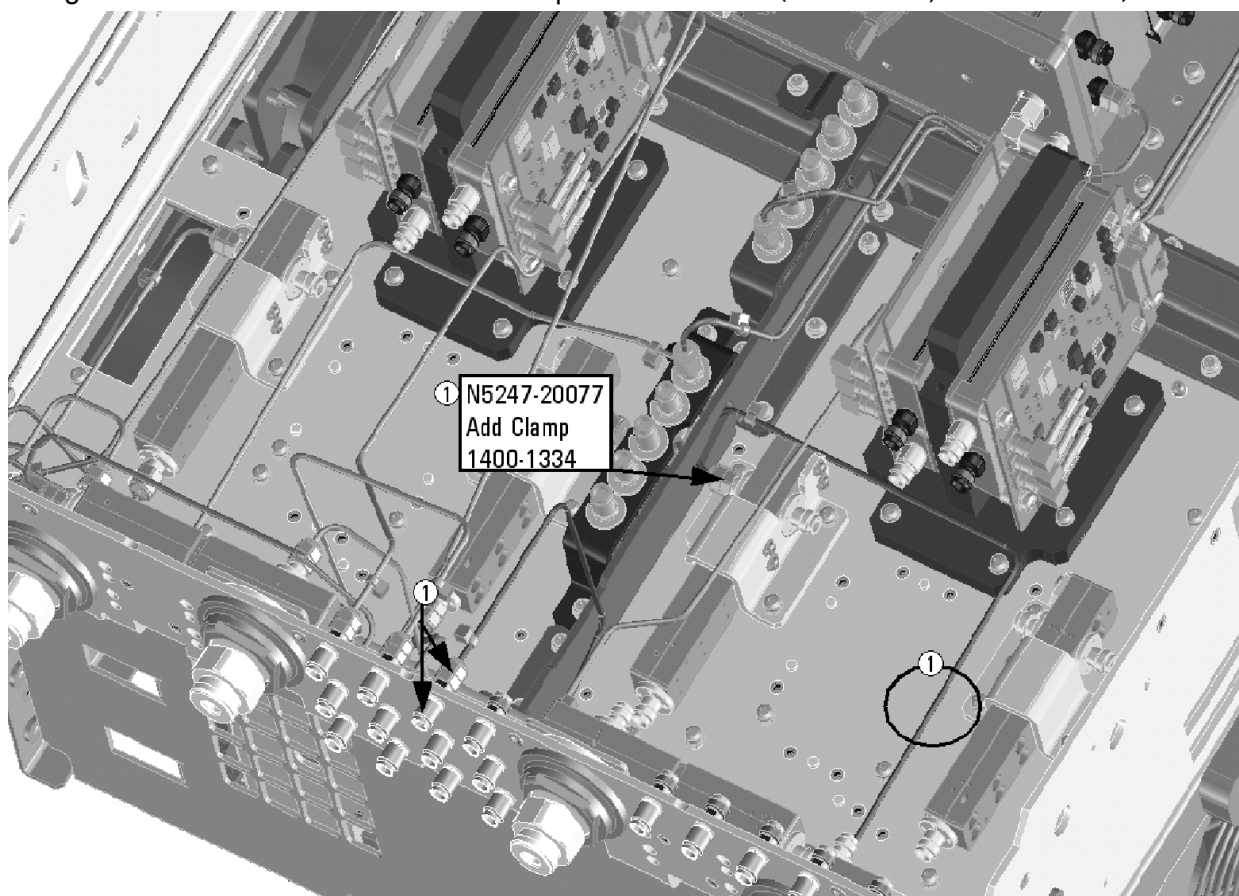


N5227_108_06

- W48 (N5247-20063) Port 3 RCVR C IN to A28 mixer brick (C)
- W38 (N5247-20007) A34 port 3 coupler to front-panel Port 3 CPLR ARM
- W35 (N5247-20023) A30 port 3 receiver coupler to front-panel port 3 SOURCE OUT
- W32 (N5247-20016) Port 1 CPLR THRU to A33 port 1 coupler
- W36 (N5247-20006) Port 3 CPLR THRU to A34 port 3 coupler
- W51 (reuse) (N5247-20011) A37 reference mixer switch to REF 1 SOURCE OUT
- W33 (N5247-20078) A29 port 1 receiver coupler to A37 reference mixer switch

* As shown in **Figure 25**, install clamp, part number 1400-1334, to secure W33.

Figure 25 Location of Cable Clamp to Secure W33 (1400-1334, N5247-20078)

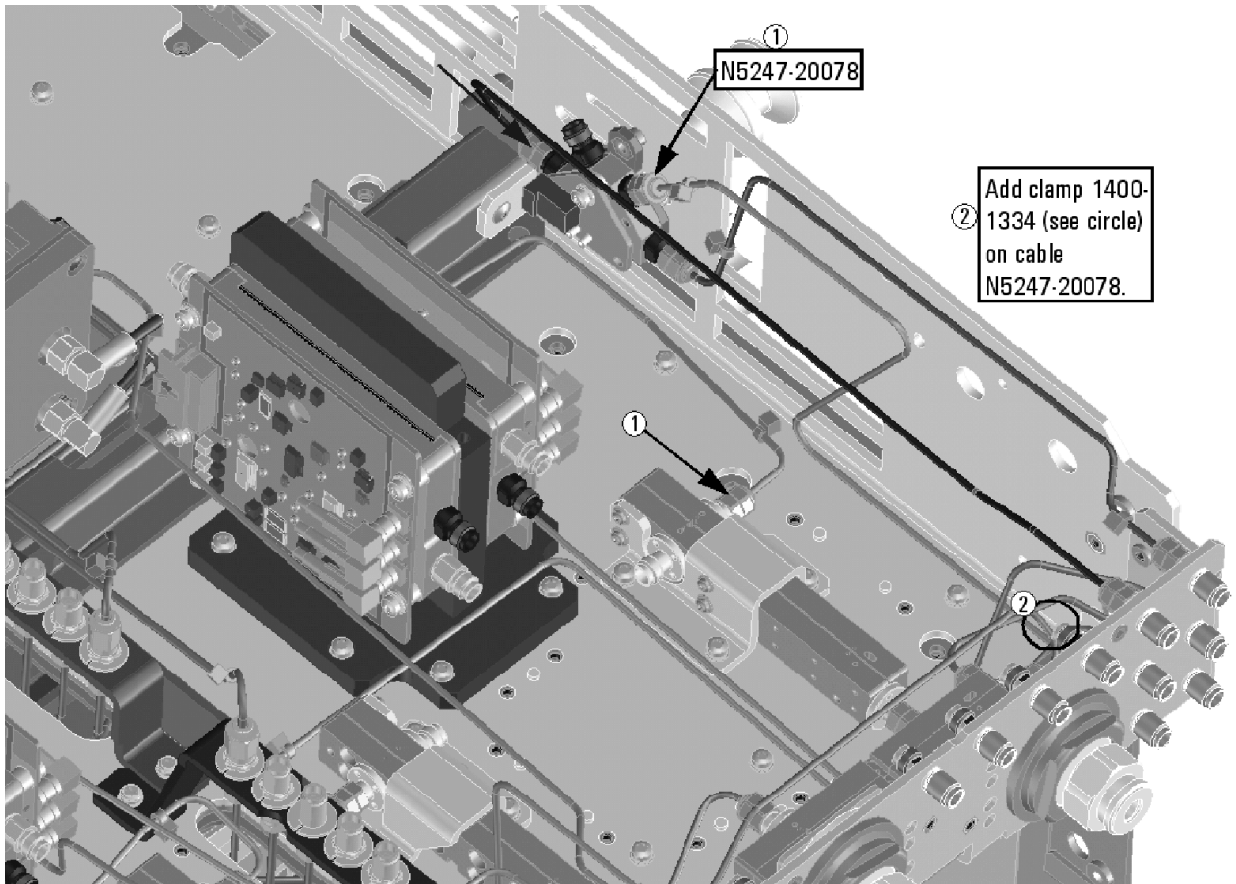


N5227_108_07

- W52 (reuse) (N5247-20012) A37 reference mixer switch to REF 1 RCVR R1 IN
- W47 (reuse) (N5247-20053) Port 1 RCVR A IN to A27 mixer brick (A)
- W34 (N5247-20082) A33 port 1 coupler to port 1 CPLR ARM
- W31 (reuse) (N5247-20037) A29 port 1 receiver coupler to front-panel port 1 SOURCE OUT
- W53 (reuse) (N5247-20048) A37 reference mixer switch to A27 mixer brick (R1)
- W18 (N5247-20084) A61 port 3 70 GHz doubler to W17
- W14 (reuse) (N5247-20072) A60 port 1 70 GHz doubler to W13
- W54 (N5247-20062) REF 3 RECEIVER R3 IN to A28 mixer brick (R3)

* As shown in **Figure 26**, install cable tie, part number 1400-0249, to secure W18, W14, and W54.

Figure 26 Location of Cable Tie to Secure W18, W14, and W54 (1400-0249, N5247-20062, N5247-20072, N5247-20084)

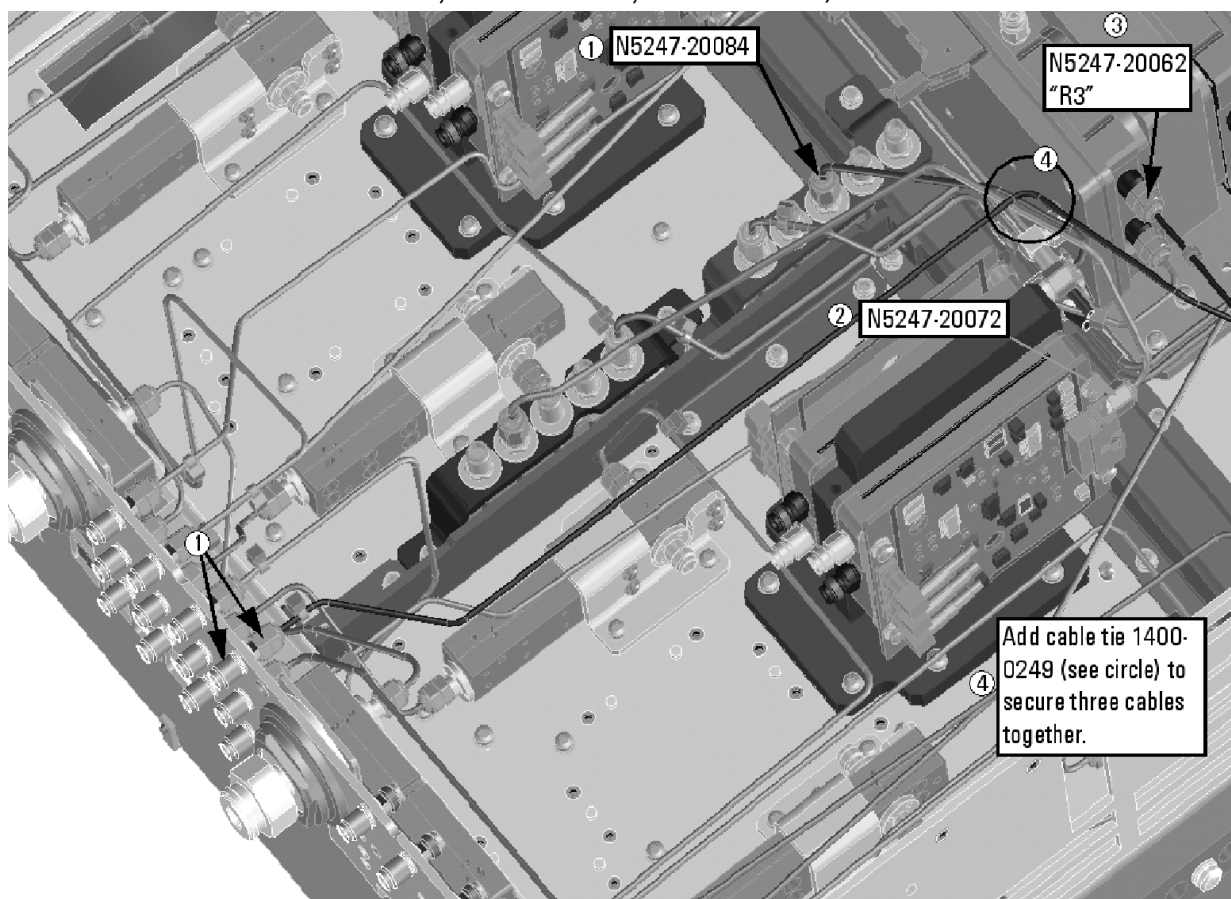

N5227_108_09

- W27 (reuse) (N5247-20074) A60 port 1 70 GHz doubler to A29 port 1 receiver coupler
- W28 (N5247-20052) A61 port 3 70 GHz doubler to A30 port 3 receiver coupler
- W16 (N5247-20060) A61 port 3 70 GHz doubler to W15
- W12 (reuse) (N5247-20059) A60 port 1 70 GHz doubler to W11
- W29 (N5247-20074) A62 port 4 70 GHz doubler to A31 port 4 receiver coupler
- W20 (N5247-20015) A62 port 4 70 GHz doubler to W19
- W24 (reuse) (N5247-20061) A63 port 2 70 GHz doubler to W23
- W30 (reuse) (N5247-20052) A63 port 2 70 GHz doubler to A32 port 2 receiver coupler
- W22 (N5247-20068) A62 port 4 70 GHz doubler to W21
- W26 (reuse) (N5247-20051) A63 port 2 70 GHz doubler to W25

- W63 (N5245-20023) A26 splitter to A27 mixer brick
 - W64 (N5245-20022) A26 splitter to A28 mixer brick
 - W62 (N5247-20111) A26 splitter to A25 HMA26.5
- * Tighten the screws that secure the A26 splitter to the mixer mounting block to 9 in-lbs.

Step 35. Install Cables on IF Multiplexer Board

Install the following gray flexible cables in the order listed. Mixer brick cables were connected to the mixer bricks earlier in this procedure, but the other ends of these cables still require a connection. To see images showing the location of these cables, click either of the Chapter 6 bookmarks “Bottom RF Cables, 4-Port, Option 401 (S/N Prefixes <6021)” in the PDF Service Guide¹. New parts are listed in **Table 1 on page 11**.

- W80 (N5242-60013) A24 IF multiplexer board P203 to A16 SPAM board J2
- W82 (N5242-60015) A24 IF multiplexer board P603 to A16 SPAM board J5
- W71 (reuse) (N5242-60017) A27 mixer brick (A) to A24 IF multiplexer (P1)
- W72 (N5242-60021) A27 mixer brick (R1) to A24 IF multiplexer (P411)
- W73 (N5242-60022) A27 mixer brick (R2) to A24 IF multiplexer (P412)
- W74 (reuse) (N5242-60018) A27 mixer brick (B) to A24 IF multiplexer (P201)
- W75 (N5242-60024) A28 mixer brick (D) to A24 IF multiplexer (P801)
- W76 (N5242-60019) A28 mixer brick (R4) to A24 IF multiplexer (P414)
- W77 (N5242-60020) A28 mixer brick (R3) to A24 IF multiplexer (P413)
- W78 (N5242-60023) A28 mixer brick (C) to A24 IF multiplexer (P601)
- W79 (reuse) (N5242-60012) A24 IF multiplexer board P3 to A16 SPAM board J1
- W81 (reuse) (N5242-60014) A24 IF multiplexer board P403 to A16 SPAM board J4
- W83 (reuse) (N5242-60016) A24 IF multiplexer board P803 to A16 SPAM board J6

Step 36. Reinstall the Testset Stabilizer Bracket on the A24 IF Multiplexer Board

Reinstall the stabilizer bracket – see **Figure 1**.

Step 37. Reinstall the A23 Test Set Motherboard

For instructions on reinstalling the board, click the Chapter 7 bookmark “Removing and Replacing the A23 test set motherboard” in the PDF Service Guide¹.

Step 38. Install Cables on the A23 Test Set Motherboard

CAUTION

Follow instructions carefully when making cable connections, especially wire harness connections. Incorrect connections can destroy components, resulting in additional customer costs.

If not already done in a previous step, install the following new ribbon cables and wire harness in the order listed. To see an image showing their locations, click the Chapter 6 bookmark “Bottom Ribbon Cables and Wire Harnesses, 4-Port, Option 401 (S/N Prefixes <6021)” in the PDF Service Guide¹. New parts are listed in **Table 1 on page 11**.

- Ribbon cable (N5247-60015) from A28 mixer brick (2) J52 to A23 test set motherboard J552
- Ribbon cable (N5247-60018), A61 port 3 70 GHz doubler J1 to A23 test set motherboard J5
- Ribbon cable (N5247-60018), A62 port 4 70 GHz doubler J1 to A23 test set motherboard J3

Step 39. Replace the Front Panel’s Lower Dress Panel

Before the front panel’s lower dress panel can be replaced, the 2-port lower dress panel and the lower front panel label must be removed from the front panel assembly. Refer to **Figure 27 on page 50**. New parts are listed in **Table 1 on page 11**.

1. Remove the 2-Port lower front panel label (item ①).
2. Remove the 10 screws (save the screws for reuse) from the 2-port dress panel and remove the dress panel (item ② and ③ respectively).
3. Reassemble the front panel’s lower dress panel assembly with the new 4-port dress panel (N5240-00009) by reversing the order of step 2 in the instructions previously followed.


NOTE

IMPORTANT! To avoid possible damage to the lower front panel overlay (label), do not attempt to attach the lower front panel label until **“Step 41. Install the Overlay” on page 51**.

1. See **“Downloading the Online PNA Service Guide” on page 9**.

Figure 27

Replacing the Front Panel's Lower Dress Panel and label

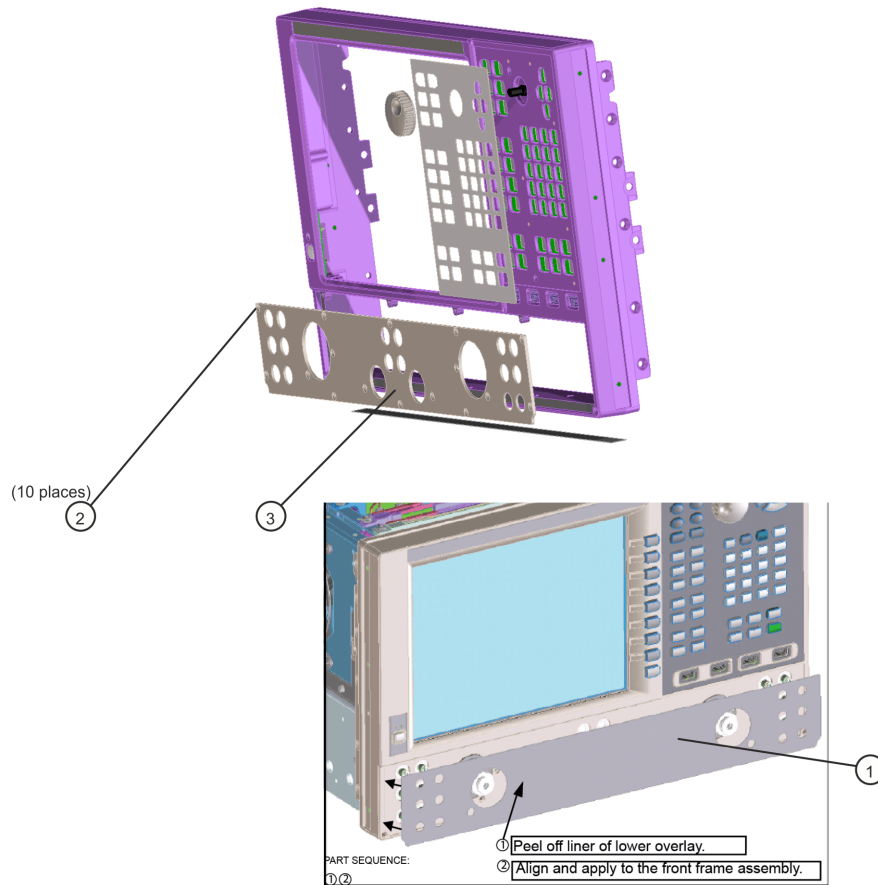

Step 40. Reinstall Front Panel Assembly

For instructions on reinstalling the front panel assembly, click the Chapter 7 bookmark “Removing and Replacing the Front Panel Assembly” in the PDF Service Guide¹.

- Be sure to install the two new screws (0515-1946) in the front panel, next to test ports 3 and 4. Torque these screws to 9 in-lbs.

1. See [“Downloading the Online PNA Service Guide” on page 9](#).

Step 41. Install the Overlay

To see an image of the front panel overlay (N5227-80027 or N5247-80021), refer to [Figure 27 on page 50](#). New parts are listed in [Table 1 on page 11](#).

1. Remove the protective backing from the new front panel overlay (N5227-80027 or N5247-80021).
2. Loosely place the overlay in the recess on the lower front panel.
3. Placing two fingers at the middle, press the overlay firmly onto the frame while sliding your fingers in opposite directions towards the ends of the overlay. Repeat on all areas of the overlay.

Step 42. Install the Jumper Cables

Install twelve W60 front panel jumper cables (N5247-20107) - use 6 new jumpers and reuse 6 old jumpers. To see an image of the front panel jumper cables, click the Chapter 7 bookmark "Removing and Replacing the Front Panel Assembly" in the PDF Service Guide¹.

Step 43. Position the Cables and Wires to Prevent Pinching

On the top side of the PNA, carefully position the gray flex cables so they can't be pinched between the covers and the rails.

On the bottom side of the PNA, carefully fold or push down the ribbon cables and wires so they can't be pinched between the hardware and the outer cover. Ribbon cables and wires must never be positioned on top of hardware.

Step 44. Reinstall the Inner Cover

For instructions, click the Chapter 7 bookmark "Removing the Covers" in the PDF Service Guide¹.

Step 45. Reinstall the Outer Cover

For instructions, click the Chapter 7 bookmark "Removing the Covers" in the PDF Service Guide¹.

Step 46. Remove Option 201 License

Procedure Requirements

- The analyzer must be powered up and operating to perform this procedure.
- The Network Analyzer program must **not** be running.
- A keyboard and mouse must be connected to the network analyzer.

1. See ["Downloading the Online PNA Service Guide" on page 9](#).

Option 201 License Removal Procedure

1. To start the Keysight License Manager, press **Start > Keysight License Manager > Keysight License Manager**. A Keysight License Manager dialog box will appear.
2. Right click the on the desired option and click **Delete**.
3. In the Keysight License Manager dialog box that appears, press or click **Yes** to confirm delete.
4. A message displays stating that the option removal was successful.
5. Restart the PNA Analyzer application: Press **File > Exit**.
6. In the Exit NA Application dialog box that opens, press **OK**.

Step 47. Enable Option 401

Procedure Requirements

NOTE

For this step, you will need a USB flash drive.

-
- The analyzer must be powered up and operating to perform this procedure.
 - The Network Analyzer program must **not** be running.
 - Refer to the license message you received from Keysight: Verify that the analyzer's model and serial numbers match those on the license message you received from Keysight.
 - A keyboard and mouse must be connected to the network analyzer.

Option Enable Procedure

1. Locate the email(s) from Keysight which contain license file attachments. These emails are a result of "**Step 1. Obtain a Keyword and Verify the Information**" on page 17.
2. Copy the license file(s) from the email(s) to the **root directory** of the USB flash drive.
More than one license file may be copied to the USB flash drive.

NOTE

A single license file may contain more than one feature.

-
3. Insert the USB flash drive to the PNA's USB drive slot. Within 5 seconds, the PNA should display a small "New licenses installed" message.

Else, load the license key file(s), manually move your license file(s) to C:\Program Files\Agilent\licensing. It may take Keysight License Manager an extra ~5 seconds to enable the licenses.

NOTE

Attempting to re-install a license file that is already installed may generate a “Corrupt Media” error message. Ignore this message.

4. Disconnect the USB flash drive from the PNA.
5. On the analyzer, click or press to open the KLM software from your PNA's Windows taskbar by pressing **Start > More Programs > Keysight License Manager folder > Keysight License Manager** and verify the options are correct.

Option Verification Procedure

Once the analyzer has restarted and the Network Analyzer program is again running:

1. Start the Network Analyzer program.
2. Once the Network Analyzer program is running:
 - Press **Help > About NA** and verify that Option 401 is listed in the PNA application.

NOTE

If the options have not been enabled, perform the “Option Enable Procedure” again. If the options are still not enabled, contact Keysight Technologies. Refer to [“Getting Assistance from Keysight” on page 6](#).

3. After successful installation of all upgrades, some features require some adjustments to ensure the instrument meets its specified performance. Refer to the Adjustments (i.e., Diagnostic Tools, Utilities, and Adjustments) topic in the PNA Online Help:
<https://rfmw.em.keysight.com/wireless/helpfiles/N52xxB/help.htm>.

Step 48. Perform Post-Upgrade Adjustments and Calibration

Adjustments

NOTE

IMPORTANT!

The 10 MHz reference crystal oscillator is the most accurate after running for three hours. The 10 MHz Frequency Reference Adjustment can be run after the PNA has warmed up for 90 minutes, and the other adjustments can be completed in the order presented, but then the 10 MHz Frequency Reference Adjustment should be repeated after the PNA has been able to warm up for three hours.

The following adjustments must be made due to the hardware changes of the analyzer.

- 10 MHz frequency reference adjustment
- EE default adjustment: Src 2 Synth Only
- synthesizer bandwidth adj. (only run when EE default adjust is not sufficient)
- source adjustment
- IF gain adjustment
- receiver adjustment
- receiver characterization
- IF Response Adjustment (Option S93090xA/B, S93092A/B, S93093A/B, or S93094A/B Only)

These adjustments are described in the PNA Service Guide and in the PNA on-line HELP. A list of equipment required to perform these adjustments is also found in the service guide.

To view this service guide information, click the Chapter 3 bookmark “Tests and Adjustments” in the PDF Service Guide¹.

After the specified adjustments have been performed, the analyzer should operate and phase lock over its entire frequency range.

EEPROM Backup

The analyzer uses arrays of correction constants to enable the analyzer to produce accurate, leveled source signals and receive clean test signals. These constants are stored in non-volatile EEPROM memory and in flash memory files.


1. See [“Downloading the Online PNA Service Guide” on page 9](#).

The adjustments listed here generate new correction constants. The analyzer must have a backup of this new data in case any of the data becomes corrupted.

To store the backup data, perform these steps:

- Navigate to the EEPROM Backup Utility, located at:
 - Windows 7 -- C:\Program Files (x86)\Keysight\Network Analyzer\Service\eebackup.exe
 - Windows 10 -- C:\Program Files\Keysight\Network Analyzer\Service\eebackup.exe
- Run the program.
- Click Backup EEPROM.
- Click Backup TSMB Mem.
- Click Backup Synth Mem. (Applies to Version 7 Synthesizers Only)
- Click Exit when the program has finished.

Figure 28 EEPROM Backup Menu

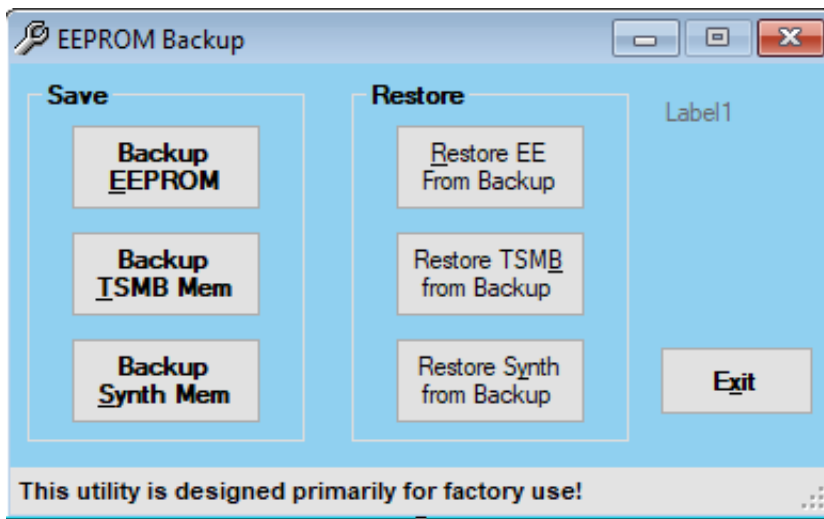

Operator's Check

Perform the Operator's Check to check the basic functionality of the analyzer. For instructions, click the Chapter 3 bookmark "Tests and Adjustments" in the PDF Service Guide¹.

If you experience difficulty with the basic functioning of the analyzer, contact Keysight. Refer to **"Contacting Keysight" on page 6.**

Calibration

Although the analyzer functions, its performance relative to its specifications has not been verified. It is recommended that a full instrument calibration be performed using the analyzer's internal performance test software. To view information on the performance test software, click the Chapter 3 bookmark "Tests and Adjustments" in the PDF Service Guide¹.

Step 49. Prepare the PNA for the User

- 1. If necessary, reinstall front jumper cables.**
- 2. Install the cable guards, pushing them over the front jumper cables until the cushioning material touches the front panel of the PNA.**
- 3. Install the dust caps on the test ports.**
- 4. Clean the analyzer, as needed, using a damp cloth.**

