
N5531X Measuring Receiver

This document contains specifications for the N5531X measuring receiver.

Notices

Copyright Notice

© Keysight Technologies 2019-2024

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies, Inc. as governed by United States and international copyright laws.

Manual Part Number

N5531-90006

Edition

Edition 1, April 2024

Published in USA

Published by:

Keysight Technologies, Inc.
1400 Fountaingrove Parkway
Santa Rosa, CA 95403

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

U.S. Government Rights

The Software is “commercial computer software,” as defined by Federal Acquisition Regulation (“FAR”) 2.101. Pursuant to FAR 12.212 and 27.405-3 and Department of Defense FAR Supplement (“DFARS”) 227.7202, the US government acquires commercial computer software under the same terms by which the software is customarily provided to the public. Accordingly, Keysight provides the Software to US government customers under its standard commercial license, which is embodied in its End User License Agreement (EULA), a copy of which can be found at <http://www.keysight.com/find/sweula>. The license set forth in the EULA represents the exclusive authority by which the US government may use, modify, distribute, or disclose the Software. The EULA and the license set forth therein, does not require or permit, among other things, that Keysight: (1) Furnish technical information related to commercial computer software or commercial computer software documentation that is not customarily provided to the public; or (2) Relinquish to, or otherwise provide, the government rights in excess of these rights customarily provided to the public to use, modify, reproduce, release, perform, display, or disclose commercial computer software or commercial computer software documentation. No additional government requirements beyond those set forth in the EULA shall apply, except to the extent that those terms, rights, or licenses are explicitly required from all providers of commercial computer software pursuant to the FAR and the DFARS and are set forth specifically in writing elsewhere in the EULA. Keysight shall be under no obligation to update, revise or otherwise modify the Software. With respect to any technical data as defined by FAR 2.101, pursuant to FAR 12.211 and 27.404.2 and DFARS 227.7102, the US government acquires no greater than Limited Rights as defined in FAR 27.401 or DFAR 227.7103-5 (c), as applicable in any technical data.

Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED “AS IS,” AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED, WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR OF ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT SHALL CONTROL.

Safety Information

CAUTION

A CAUTION notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a CAUTION notice until the indicated conditions are fully understood and met.

WARNING

A WARNING notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a WARNING notice until the indicated conditions are fully understood and met.

28 Measuring Receiver

This chapter contains specifications for the N5531X measuring receiver system comprised of:

- N9030B PXA signal analyzer (NOT the N9030A model);
- N9091EM0E Measuring Receiver application software and;
- U5532C USB sensor module (any option); or alternatively,
- Power meter (models N1913A/B, N1914A/B, N1911A or N1912A recommended, or E4416A, E4417A, E4418B, E4419B), and the N5532B/A Sensor Module. When used with the N1911A or N1912A power meter, an adapter (N5532B-019) is required.

Additional Definitions and Requirements

This chapter contains specifications and supplemental information for the N5531X measuring receiver "one-box" configuration (comprised of an N9030B PXA signal analyzer with the N9091EMOE and a U5532C USB sensor module), or alternatively, the N5531X measuring receiver system (comprised of a N9030B PXA signal analyzer with the N9091EMOE, a P-Series (N1911A, N1912A), an EPM-Series (N1913A/B, N1914A/B), or a legacy EPM/EPM-P Series (E4416A, E4417A, E4418B, E4419B)¹ power meter, and an N5532B/A sensor module).

Available for the N9030B PXA with all frequency options.

In addition to the required general conditions stated on page 16, the following conditions must be met for the analyzer to meet the specifications included in this chapter.

N9030B PXA Conditions Required to Meet Specifications

- Accuracy Mode set to "High" when performing Tuned RF Level (TRFL)
- Fast Mode set to "Off" when performing modulation measurements.
- At least 2 hours of storage or operation at the operating temperature of 20 to 30 °C.
- The N9030B PXA has been turned on at least 30 minutes with **Auto Align On** selected or if **Auto Align Off** is selected, **Align All Now** must be run:
 - Within the last 24 hours, or
 - Any time the ambient temperature changes more than 3 °C, or
 - After the analyzer has been at operating temperature at least 2 hours.
- For analog modulation measurements, a direct connection between the N9030B PXA and the device under test (DUT) is required to achieve the best performance and meet the specifications for all test frequencies.
- Warranted analog modulation analysis specifications apply to mixer level –24 to –18 dBm (mixer level = Input power level – Attenuation).
- Additional conditions are listed at the beginning of the FM, AM, and PM sections, in specification tables, or in footnotes.

1. For the discontinued legacy EPM/EPM-P Series (E4416A, E4417A, E4418B, E4419B) power meters to work with the N5531X measuring receiver system, a USB-to-GPIB converter, or a LAN/GPIB gateway is required.

Measuring Receiver
Additional Definitions and Requirements

PXA options that are NOT supported or conditionally supported by the N5531X:

Option Number	Description	Note
N9030B-B5X	Analysis bandwidth, 510 MHz	Only supported in the PXA without Option N9030B-107 (Audio input and digitizer) as it competes slot with Option N9030B-107
N9030B-BBA	I/Q Baseband Inputs, Analog	Competes slot with Option N9030B-107 (Audio input and digitizer); yet to be qualified in the production line

Definitions of terms used in this chapter

Let P_{signal} (S) = Power of the signal; P_{noise} (N) = Power of the noise; $P_{\text{distortion}}$ (D) = Power of the harmonic distortion ($P_{H2} + P_{H3} + \dots + P_{Hi}$ where Hi is the i^{th} harmonic up to $i=10$);

P_{total} = Total power of the signal, noise and distortion components.

Term	Short Hand	Definition
Information bandwidth (Info BW)	IF BW	Also called demodulation bandwidth or channel bandwidth. It is one of the determinants of the capacity of a given communication channel. The wider the Info BW, the greater amount of information carried by the modulated signal can be analyzed. Info BW is typically 1.25 times sample rate. Noise passes through only this bandwidth in demodulation if no post-process filter is applied. The maximum Info BW depends on the analysis BW option equipped with the analyzer. However, the demodulation specifications only apply to the Channel BW indicated in the following sections.
Distortion	$\frac{N + D}{S + N + D}$	$(P_{\text{total}} - P_{\text{signal}})^{1/2} / (P_{\text{total}})^{1/2} \times 100\%$
THD	$\frac{D}{S}$	$(P_{\text{distortion}})^{1/2} / (P_{\text{signal}})^{1/2} \times 100\%$ where THD is the total harmonic distortion
SINAD	$\frac{S + N + D}{N + D}$	$20 \times \log_{10} [1 / (P_{\text{distortion}})]^{1/2} = 20 \times \log_{10} [(P_{\text{total}})^{1/2} / (P_{\text{total}} - P_{\text{signal}})^{1/2}]$ where SINAD is Signal-to-Noise-And-Distortion ratio
SNR	$\frac{S + N + D}{N}$	$P_{\text{signal}} / P_{\text{noise}} \sim (P_{\text{signal}} + P_{\text{noise}} + P_{\text{distortion}}) / P_{\text{noise}}$ where SNR is the Signal-to-Noise Ratio. The approximation is per the implementations defined with the Keysight 8903A.

NOTE

P_{noise} must be limited to the bandwidth of the applied filters.
 The harmonic sequence is limited to the 10th harmonic unless otherwise indicated.
 P_{noise} includes all spectral energy that is not near harmonic frequencies, such as spurious signals, power line interference, etc.

RF Carrier Frequency and Bandwidth

Description	Specifications	Supplemental Information
Carrier Frequency		
Maximum Frequency		
<i>Option 503</i>	3.6 GHz	RF/ μ W frequency option
<i>Option 508</i>	8.4 GHz	RF/ μ W frequency option
<i>Option 513</i>	13.6 GHz	RF/ μ W frequency option
<i>Option 526</i>	26.5 GHz	RF/ μ W frequency option
<i>Option 544</i>	44 GHz	mmW frequency option
<i>Option 550</i>	50 GHz	mmW frequency option
Minimum Frequency		
AC Coupled ^a	10 MHz	In practice, limited by the need to keep modulation sidebands from folding, and by the interference from LO feedthrough.
DC Coupled	2 Hz	
Maximum Information Bandwidth (Info BW)^b		
Standard <i>B25</i>	25 MHz	
<i>Option B40</i>	40 MHz	
<i>Option B85</i>	85 MHz	
<i>Option B1X</i>	160 MHz	
<i>Option B2X</i>	160 MHz ^c	
<i>Option B5X</i>	160 MHz ^c	Not compatible with <i>Option 107</i>

- AC Coupled is only applicable to frequency *Options 503, 508, 513, and 526*.
- The maximum Info BW indicates the maximum operational BW, which depends on the analysis BW option equipped with the analyzer. However, the demodulation specifications only apply to the IF BW indicated in the AM, FM, and PM sections.
- While *Option B2X* and *B5X* offer 255 MHz and 510 MHz analysis BW in the I/Q Analysis mode, the maximum Info BW is limited by the N9063EM0E Analog Demod Application to 160 MHz.

Frequency Modulation (FM)

Additional conditions required to meet specifications:

- Peak FM Deviation ≥ 10 Hz
- β (modulation index) = (FM Deviation)/(FM Rate). The maximum β is 20,000; and it is 50 for rate > 100 kHz, 20 for rate > 200 kHz, and 5 for rate > 500 kHz. The minimum β is 0.001; and it is 1 for rate < 50 Hz, and 5 for rate < 20 Hz
- Info Bandwidth (BW): ≤ 40 MHz for center frequency (f_c) up to 50 GHz
- SINAD BW: (IF BW/2)
- Single tone: sinusoid modulation

Description	Specification	Supplemental Information
Input Power Range	-24 to +30 dBm	
FM Rate Range^a		
100 kHz $\leq f_c \leq 50$ GHz	10 Hz to 1 MHz	
Peak FM Deviations^a		
100 kHz $< f_c < 50$ GHz	16 MHz maximum	
FM Deviation Accuracy ^b		
RF Frequency Range		
100 kHz to 3.6 GHz	$\pm(1.0 \times 10^{-7} \times \text{Dev}^{0.75} + 0.002) \times (\text{Dev} + \text{Rate})$	
3.6 to 8.4 GHz 2 kHz \leq Rate, $0.01 \leq \beta$ Rate ≤ 20 Hz, $100 \leq \text{Dev} + \text{Rate}$	$\pm(2.0 \times 10^{-7} \times \text{Dev}^{0.75} + 0.002) \times (\text{Dev} + \text{Rate})$	
8.4 to 13.6 GHz 1 MHz = Rate, $0.005 \leq \beta$ Rate ≤ 50 Hz, $200 \leq \text{Dev} + \text{Rate}$	$\pm(1.5 \times 10^{-7} \times \text{Dev}^{0.75} + 0.002) \times (\text{Dev} + \text{Rate})$	
13.6 to 17.1 GHz 500 kHz \leq Rate, $0.01 \leq \beta$ Rate ≤ 50 Hz, $150 \leq \text{Dev} + \text{Rate}$	$\pm(2.5 \times 10^{-7} \times \text{Dev}^{0.75} + 0.002) \times (\text{Dev} + \text{Rate})$	
17.1 to 26.5 GHz 100 kHz \leq Rate, $0.02 \leq \beta$ Rate ≤ 100 Hz, $150 \leq \text{Dev} + \text{Rate}$	$\pm(4.0 \times 10^{-7} \times \text{Dev}^{0.75} + 0.003) \times (\text{Dev} + \text{Rate})$	
26.5 to 34.5 GHz 100 kHz \leq Rate, $0.02 \leq \beta$, Rate ≤ 100 Hz, $150 \leq \text{Dev} + \text{Rate}$	$\pm(5.0 \times 10^{-7} \times \text{Dev}^{0.75} + 0.003) \times (\text{Dev} + \text{Rate})$	
34.5 to 50 GHz 20 kHz \leq Rate, $0.05 \leq \beta$ Rate ≤ 100 Hz, $150 \leq \text{Dev} + \text{Rate}$	$\pm(1.5 \times 10^{-6} \times \text{Dev}^{0.75} + 0.003) \times (\text{Dev} + \text{Rate})$	

Measuring Receiver
Frequency Modulation (FM)

- a. The modulation rates and the peak deviations that the system is capable of measuring are governed by the instrument's Information Bandwidth (IF BW) setting which depends on the PXA's analysis bandwidth hardware). Their relationship is described by the equation: Peak deviation (in Hz) = (IF BW)/2 – modulation rate.
- b. When the carrier frequency f_c is less than 10 MHz, to avoid the image signal that appears in the IF corresponding to the negative of the signal frequency, the f_c and IF BW must be chosen to satisfy $IF\ BW < 2 \times (f_c - 100\text{ kHz})$. In the FM deviation accuracy specifications, the FM deviation (Dev) and the FM rate (Rate) are both in Hz.

Description	Specification	Supplemental Information
Modulation Distortion Floor		See “Modulation Distortion” on page 400.
AM Rejection (50 Hz to 3 kHz BW)^a		
Frequency Range	Max peak deviation	
100 kHz to 3.6 GHz	0.6 Hz	
3.6 GHz to 8.4 GHz	1.0 Hz	
8.4 to 13.6 GHz	1.4 Hz	
13.6 to 17.1 GHz	1.7 Hz	
17.1 to 26.5 GHz	2.6 Hz	
26.5 to 34.5 GHz	3.3 Hz	
34.5 to 50 GHz	5.3 Hz	

- a. AM rejection (also known as "incidental FM" due to AM) describes the instrument's FM reading for an input that is strongly AMed (with no FM); this specification includes contributions from residual FM. AM signal (Rate = 1 kHz, Depth = 50%), HPF=50 Hz, LPF = 3 kHz, Channel BW = 15 kHz. Conditions that would constrain FM deviation or beta near zero, or constrain the rate of modulation, do not apply to Incidental FM.

Measuring Receiver
Frequency Modulation (FM)

Description	Specification	Supplemental Information
<p>Residual FM (50 Hz to 3 kHz BW)^{ab} RF Frequency</p> <p>100 kHz to 3.6 GHz</p> <p>3.6 to 8.4 GHz</p> <p>8.4 to 13.6 GHz</p> <p>13.6 to 17.1 GHz</p> <p>17.1 to 26.5 GHz</p> <p>26.5 to 34.5 GHz</p> <p>34.5 to 50 GHz</p> <p>Detectors</p> <p>Auto Carrier Frequency Triggering</p>	<p>< 0.4 Hz (rms)</p> <p>< 0.6 Hz (rms)</p> <p>< 0.9 Hz (rms)</p> <p>< 1.1 Hz (rms)</p> <p>< 1.7 Hz (rms)</p> <p>< 2.2 Hz (rms)</p> <p>< 3.3 Hz (rms)</p> <p>Free run, Video, RF Burst, External</p>	<p>Available: +peak, -peak, \pmpeak/2, peak hold, rms</p>

- a. The Residual FM specification is a warranted traceable worst-case figure for the entire band. For most instruments, at most frequencies, the actual residual FM performance is usually much better (lower). When testing the Residual FM of a DUT, the measurement result is the combined noise of the DUT and the measuring receiver. If the FM noise of the DUT and the measuring receiver are uncorrelated (normally the case), then these two contributors can only add to each other in a RSS (Root-Sum-Squared) manner. Therefore, we can say with high confidence that the FM noise of the DUT is no greater than the Residual FM indicated by the measuring receiver.
- b. Residual FM describes the instrument's FM reading for an input that has no FM and no AM; this specification includes contributions from FM deviation accuracy. HPF = 50 Hz, LPF = 3 kHz, Channel BW = 15 kHz. Conditions that would constrain FM deviation or beta near zero, or constrain the rate of modulation, do not apply to residual FM.

Amplitude Modulation (AM)

Additional conditions required to meet specifications:

- Info BW (IF BW) \leq 40 MHz for center frequency (f_c) up to 50 GHz
- IF BW: 5 times of AM rate
- SINAD BW: (IF BW)/2
- Single tone: sinusoid modulation

Description	Specification	Supplemental Information
Input Power Range	-24 to +30 dBm	
AM Rate Range^a 100 kHz \leq f_c < 50 GHz	10 Hz to 1 MHz	

- a. When the carrier frequency f_c is less than 10 MHz, to avoid the image signal that appears in the intermediate frequency corresponding to the negative of the signal frequency, the f_c and IF BW must be chosen to satisfy $\text{IF BW} < 2 \times (f_c - 100 \text{ kHz})$.

Measuring Receiver
Amplitude Modulation (AM)

Description	Specification	Supplemental Information
AM Depth Range	1 to 99% (Depth + Power ratio of Distortion + Power ratio of Noise < 100%)	Capable of measuring AM depth range of 0 to 100%.
AM Depth Accuracy^{ab}		
RF Frequency Range		
100 kHz to 3.6 GHz Depth 2 to 99%		
Rate ≤ 10 kHz 10 kHz < Rate	±0.001 × reading ±0.00001 × (Rate/1 Hz) ^{0.5} × reading	
3.6 to 13.6 GHz Depth 5 to 99%		
Rate ≤ 10 kHz 10 kHz < Rate	±0.001 × reading ±0.00001 × (Rate/1 Hz) ^{0.5} × reading	
13.6 to 17.1 GHz Depth 5 to 99%		
Rate ≤ 5 kHz 5 kHz < Rate	±0.001 × reading ±0.00001 × (2 × Rate/1 Hz) ^{0.5} × reading	
17.1 to 26.5 GHz Depth 5 to 99%		
Rate ≤ 5 kHz 5 kHz < Rate	±0.001 × reading ±(0.00001 × (3 × Rate/1 Hz) ^{0.5} - 2.2 × 10 ⁻⁴) × reading	
26.5 to 34.5 GHz Depth 5 to 99%		
Rate ≤ 5 kHz 5 kHz < Rate	±0.0012 × reading ±(0.000012 × (3 × Rate/1 Hz) ^{0.5} - 2.7 × 10 ⁻⁴) × reading	
34.5 to 50 GHz Depth 5 to 99%		
Rate ≤ 5 kHz 5 kHz < Rate	±0.0025 × reading ±(1.2 × 10 ⁻⁷ × (Rate/1 Hz) + 2.5 × 10 ⁻³) × reading	

- a. For peak measurement only: AM accuracy may be affected by distortion generated by the measuring receiver. In the worst case this distortion can decrease accuracy by 0.1% of reading for each 0.1% of distortion.
- b. Reading is a measured AM depth in %.

Measuring Receiver
Amplitude Modulation (AM)

Description	Specification	Supplemental Information
Flatness^{ab}		
5% ≤ Depth		
Frequency Range		
100 kHz to 3.6 GHz	$\pm (0.00004 \times \sqrt{\frac{\text{Rate[Hz]}}{1\text{Hz}}} \times \text{reading})$	
3.6 to 8.4 GHz	$\pm (0.00008 \times \sqrt{\frac{\text{Rate[Hz]}}{1\text{Hz}}} \times \text{reading})$	
8.4 to 13.6 GHz		
Rate ≤ 500 Hz	$\pm 0.01 \times \text{reading}$	
500 Hz < Rate	$\pm (0.00025 \times (\frac{\text{Rate[Hz]}}{1\text{Hz}})^{0.6} \times \text{reading})$	
13.6 to 17.1 GHz		
Rate ≤ 500 Hz	$\pm 0.015 \times \text{reading}$	
500 Hz < Rate	$\pm (0.0002 \times (\frac{\text{Rate[Hz]}}{1\text{Hz}})^{0.64} \times \text{reading})$	
17.1 to 26.5 GHz		
Rate ≤ 500 Hz	$\pm 0.035 \times \text{reading}$	
500 Hz < Rate	$\pm (0.0015 \times \sqrt{\frac{\text{Rate[Hz]}}{1\text{Hz}}} \times \text{reading})$	
26.5 to 34.5 GHz		
Rate ≤ 1 kHz	$\pm 0.05 \times \text{reading}$	
1 kHz < Rate	$\pm (0.0015 \times \sqrt{\frac{\text{Rate[Hz]}}{1\text{Hz}}} \times \text{reading})$	
34.5 to 50 GHz		
Rate ≤ 1 kHz	$\pm 0.12 \times \text{reading}$	
1 kHz < Rate	$\pm (0.004 \times \sqrt{\frac{\text{Rate[Hz]}}{1\text{Hz}}} \times \text{reading})$	
Modulation Distortion Floor		See “Modulation Distortion” on page 400.

- a. Flatness is the relative variation in indicated AM depth versus rate for a constant carrier frequency and depth.
b. Reading is a measured AM depth in %.

Measuring Receiver
Amplitude Modulation (AM)

Description	Specification	Supplemental Information
FM Rejection (50 Hz to 3 kHz BW)^a		
Frequency Range		
100 kHz to 3.6 GHz	0.05% (peak)	
3.6 to 17.1 GHz	0.1% (peak)	
17.1 to 34.5 GHz	0.11% (peak)	
FM Rejection (rms)^b		
<i>Option EPO</i>		
100 kHz to 8.4 GHz	0.025% (rms)	
Residual AM (50 Hz to 3 kHz BW)^c		
Frequency Range		
100 kHz to 3.6 GHz	0.005% (rms)	
3.6 to 17.1 GHz	0.01% (rms)	
17.1 to 34.5 GHz	0.02% (rms)	
34.5 to 50.0 GHz	0.05% (rms)	
Residual AM (30 Hz to 23 kHz BW)^d		
Frequency Range		
100 kHz to 34.5 GHz	0.01% (rms)	
34.5 to 50.0 GHz	0.02% (rms)	
Detectors		Available: +peak, -peak, ±peak/2, peak hold, rms
Auto Carrier Frequency Triggering	Free run, Video, RF Burst, External	

- FM rejection (also known as "incidental AM" due to FM/PM) describes the instrument's AM reading for an input that is strongly FMed (with no AM); this specification includes contributions from residual AM. FM signal (Rate = 1 kHz, Deviation = 50 kHz, HPF= 50 Hz, LPF = 3 kHz, Channel BW = 420 kHz. Conditions that would constrain AM depth, or constrain the rate of modulation, do not apply to incidental AM.
- FM rejection (also known as "incidental AM" due to FM/PM) describes the instrument's AM reading for an input that is strongly FMed (with no AM); this specification includes contributions from residual AM. FM signal (Rate = 1 kHz, Deviation = 50 kHz, HPF= 50 Hz, LPF = 3 kHz, Channel BW = 12 MHz. Conditions that would constrain AM depth, or constrain the rate of modulation, do not apply to incidental AM.
- Residual AM describes instruments AM reading for an input that has no AM and no FM; this specification includes contribution from AM depth accuracy. HPF = 50 Hz, LPF = 3 kHz, channel BW = 6 kHz.
- Residual AM describes instruments AM reading for an input that has no AM and no FM; this specification includes contribution from AM depth accuracy. HPF = 30 Hz, LPF = 23 kHz, channel BW = 46 kHz. Option FBP is required except Band 0.

Phase Modulation (PM)

Additional conditions required to meet specifications:

- Info BW (IF BW) \leq 40 MHz for center frequency (f_c) up to 50 GHz
- HPF = 20 Hz is always On (unless otherwise stated)
- SINAD BW = (IF BW)/2 - Single

tone: sinusoid modulation

Description	Specification	Supplemental Information
Input Power Range	-24 to +30 dBm	
PM Rate Range^a 100 kHz \leq f_c < 50 GHz	50 Hz to 1 MHz	
Peak Phase Deviation^b 100 kHz \leq f_c < 50 GHz	0.01 to 25,000 radians ^c	

- a. Below 500 Hz PM rate, set the HPF to "None" to meet the PM deviation accuracy specifications.
- b. The f_c and IF BW must be chosen to satisfy IF BW < 2x(f_c - 100 kHz).
- c. The maximum peak deviation that the instrument is capable of measuring depends on the IF BW setting and the modulation rate of the signal-under-test. The relationship is described by the equation:
Max peak deviation (in radians) = [IF BW/(2 x modulation rate in Hz)] - 1.

Measuring Receiver
Phase Modulation (PM)

Description	Specification	Supplemental Information
PM Deviation Accuracy^a		
RF Frequency range		
<i>Option EP1</i>		
100 kHz to 3.6 GHz		
0.01 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	±Max {0.001 x reading ^{0.25} + 0.001, 1.0 x 10 ⁵ x Rate ⁻⁴ x reading}	
100 kHz < Rate	±8.0 x 10 ⁻⁶ x Rate ^{0.5} x reading ^{0.25}	
3.6 to 13.6 GHz		
0.01 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	±Max {0.002 x reading ^{0.25} + 0.001, 1.0 x 10 ⁵ x Rate ⁻⁴ x reading}	
100 kHz < Rate	±1.0 x 10 ⁻⁵ x Rate ^{0.5} x reading ^{0.25}	
13.6 to 17.1GHz		
0.02 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	±Max {0.002 x reading ^{0.25} + 0.001, 1.0 x 10 ⁵ x Rate ⁻⁴ x reading}	
100 kHz < Rate	±1.0 x 10 ⁻⁵ x Rate ^{0.5} x reading ^{0.25}	
17.1 to 26.5 GHz		
0.02 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	±Max {0.0025 x reading ^{0.25} + 0.001, 1.0 x 10 ⁵ x Rate ⁻⁴ x reading}	
100 kHz < Rate	±1.0 x 10 ⁻⁵ x Rate ^{0.5} x reading ^{0.25}	
26.5 to 34.5 GHz		
0.05 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	±Max {0.0025 x reading ^{0.25} + 0.0025, 1.0 x 10 ⁵ x Rate ⁻⁴ x reading}	
100 kHz < Rate,	±1.0 x 10 ⁻⁵ x Rate ^{0.5} x reading ^{0.25}	
34.5 to 50 GHz		
0.05 ≤ Dev		

Measuring Receiver
Phase Modulation (PM)

Description	Specification	Supplemental Information
100 Hz ≤ Rate ≤ 100 kHz	$\pm \text{Max} \{0.006 \times \text{reading}^{0.25} + 0.004, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$	
100 kHz < Rate	$\pm 1.5 \times 10^{-5} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	
PM Deviation Accuracy^a		
RF Frequency range		
<i>Option EPO</i>		
100 kHz to 3.6 GHz		
100 Hz ≤ Rate ≤ 100 kHz	$\pm \text{Max} \{0.001 \times \text{reading}^{0.25} + 0.001, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$	
100 kHz < Rate	$\pm 6.0 \times 10^{-6} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	
3.6 to 13.6 GHz		
100 Hz ≤ Rate ≤ 100 kHz	$\pm \text{Max} \{0.002 \times \text{reading}^{0.25} + 0.001, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$	
100 kHz < Rate	$\pm 1.0 \times 10^{-5} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	
13.6 to 17.1GHz		
0.02 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	$\pm \text{Max} \{0.002 \times \text{reading}^{0.25} + 0.001, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$	
100 kHz < Rate	$\pm 1.0 \times 10^{-5} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	
17.1 to 26.5 GHz		
0.02 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	$\pm \text{Max} \{0.0025 \times \text{reading}^{0.25} + 0.001, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$	
100 kHz < Rate	$\pm 1.0 \times 10^{-5} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	
26.5 to 34.5 GHz		
0.05 ≤ Dev		
100 Hz ≤ Rate ≤ 100 kHz	$\pm \text{Max} \{0.0025 \times \text{reading}^{0.25} + 0.001, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$	
100 kHz < Rate	$\pm 1.0 \times 10^{-5} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	

Measuring Receiver
Phase Modulation (PM)

Description	Specification	Supplemental Information
34.5 to 50 GHz $0.05 \leq \text{Dev}$ $100 \text{ Hz} \leq \text{Rate} \leq 100 \text{ kHz}$ $100 \text{ kHz} < \text{Rate}$	$\pm \text{Max} \{0.006 \times \text{reading}^{0.25} + 0.001, 1.0 \times 10^5 \times \text{Rate}^{-4} \times \text{reading}\}$ $\pm 1.5 \times 10^{-5} \times \text{Rate}^{0.5} \times \text{reading}^{0.25}$	
Modulation Distortion Floor		See “Modulation Distortion” on page 400.

- a. The function of $\text{Max} \{x, y\}$ means whichever is greater between x and y. The deviation reading is in radian, and rate is in Hz.

Measuring Receiver
Phase Modulation (PM)

Description	Specification	Supplemental Information
AM Rejection (50 Hz to 3 kHz BW)^a		
<i>Option EP1</i>		
100 kHz to 3.6 GHz	2.4 mrad (peak)	
3.6 to 8.4 GHz	4.0 mrad (peak)	
8.4 to 13.6 GHz	6.4 mrad (peak)	
13.6 to 17.1 GHz	8.0 mrad (peak)	
17.1 to 26.5 GHz	12.4 mrad (peak)	
26.5 to 34.5 GHz	16.2 mrad (peak)	
34.5 to 50 GHz	23.4 mrad (peak)	
<i>Option EPO</i>		
100 kHz to 3.6 GHz	0.4 mrad (peak)	
3.6 to 8.4 GHz	1.0 mrad (peak)	
8.4 to 13.6 GHz	1.6 mrad (peak)	
13.6 to 17.1 GHz	2.0 mrad (peak)	
17.1 to 26.5 GHz	3.1 mrad (peak)	
26.5 to 34.5 GHz	4.0 mrad (peak)	
34.5 to 50 GHz	5.6 mrad (peak)	
Residual PM (50 Hz to 3 kHz BW)^{bc}		
<i>Option EP1</i>		
100 kHz to 3.6 GHz	1.4 mrad (rms)	
3.6 to 8.4 GHz	2.5 mrad (rms)	
8.4 to 13.6 GHz	3.9 mrad (rms)	
13.6 to 17.1GHz	4.9 mrad (rms)	
17.1 to 26.5 GHz	7.5 mrad (rms)	
26.5 to 34.5 GHz	9.8 mrad (rms)	
34.5 to 50 GHz	14.1 mrad (rms)	
<i>Option EPO</i>		
100 kHz to 3.6 GHz	0.3 mrad (rms)	
3.6 to 8.4 GHz	0.7 mrad (rms)	
8.4 to 13.6 GHz	1.1 mrad (rms)	

Measuring Receiver
Phase Modulation (PM)

Description	Specification	Supplemental Information
13.6 to 17.1GHz	1.3 mrad (rms)	
17.1 to 26.5 GHz	2.0 mrad (rms)	
26.5 to 34.5 GHz	2.6 mrad (rms)	
34.5 to 50 GHz	3.7 mrad (rms)	
Detectors		Available: +peak, -peak, \pm peak/2, peak hold, rms
Auto Carrier Frequency Triggering	Free run, Video, RF Burst, External	

- a. AM rejection (also known as "incidental PM" due to AM) describes the instrument's PM reading for an input that is strongly AMed (with no PM); this specification includes contributions from residual PM. AM signal (Rate = 1 kHz, Depth = 50%), HPF=50 Hz, LPF = 3 kHz, Channel BW = 15 kHz. Conditions that would constrain PM deviation or beta near zero, or constrain the rate of modulation, do not apply to incidental PM.
- b. The Residual PM specification is a warranted traceable worst-case figure for the entire band. For most instruments, at most frequencies, the actual residual PM performance is usually much better (lower). When testing the Residual PM of a DUT, the measurement result is the combined noise of the DUT and the measuring receiver. If the phase noise of the DUT and measuring receiver are uncorrelated (normally the case), then these two contributors can only add to each other in a RSS (Root-Sum-Squared) manner. Therefore, we can say with high confidence that the phase noise of the DUT is no greater than the Residual PM indicated by the measuring receiver.
- c. Residual PM describes the instrument's PM reading for an input that has no PM and no AM; this specification includes contributions from PM deviation accuracy. HPF = 50 Hz, LPF = 3 kHz, IF BW = 15 kHz. Conditions that would constrain PM deviation or beta near zero, or constrain the rate of modulation, do not apply to residual PM.

Modulation Rate

FM Rate: 10 Hz to 1 MHz

AM Rate: 10 Hz to 1 MHz

PM Rate: 50 Hz to 1 MHz

Description	Specification	Supplemental Information
FM Rate Accuracy^a [Hz]		
<i>Option EP1</i>		
100 kHz to 3.6 GHz Rate ≤ 2 kHz	±(0.005 / Deviation) x Rate + rfa or ±0.00001 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.01 ≤ β	$\pm \left(\frac{4.0 \times 10^{-8}}{\beta} + 1.0 \times 10^{-7} \right) \times Rate^{1.5} + rfa$	
3.6 to 8.4 GHz Rate ≤ 2 kHz	±(0.01 / Deviation) x Rate + rfa or ±0.00001 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.02 ≤ β	$\pm \left(\frac{6.0 \times 10^{-8}}{\beta} + 8.0 \times 10^{-8} \right) \times Rate^{1.5} + rfa$ $\pm \left(3.5 \times 10^{-8} \times \beta^{1/4} \right) \times Rate^{1.5} + rfa$	β ≤ 20 20 < β
8.4 to 13.6 GHz Rate ≤ 2 kHz	±(0.015 / Deviation) x Rate + rfa or ±0.00001 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.02 ≤ β	$\pm \left(\frac{5.0 \times 10^{-8}}{\beta} + 1.2 \times 10^{-7} \right) \times Rate^{1.5} + rfa$	
13.6 to 17.1GHz Rate ≤ 2 kHz	±(0.018 / Deviation) x Rate + rfa or ±0.00001 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.02 ≤ β	$\pm \left(\frac{8.0 \times 10^{-8}}{\beta} + 8.0 \times 10^{-8} \right) \times Rate^{1.5} + rfa$ $\pm \left(3.5 \times 10^{-8} \times \beta^{1/4} \right) \times Rate^{1.5} + rfa$	β ≤ 20 20 < β
17.1 to 26.5 GHz Rate ≤ 2 kHz, 20 Hz ≤ Deviation	±(0.025 / Deviation) x Rate + rfa or ±0.00002 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.05 ≤ β	$\pm \left(\frac{1.0 \times 10^{-7}}{\beta} + 1.5 \times 10^{-7} \right) \times Rate^{1.5} + rfa$ $\pm \left(6.0 \times 10^{-8} \times \beta^{1/4} \right) \times Rate^{1.5} + rfa$	β ≤ 20 20 < β
26.5 to 34.5 GHz Rate ≤ 2 kHz, 20 Hz ≤ Deviation	±(0.035 / Deviation) x Rate + rfa or ±0.00002 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.05 ≤ β	$\pm \left(\frac{1.0 \times 10^{-7}}{\beta} + 1.5 \times 10^{-7} \right) \times Rate^{1.5} + rfa$ $\pm \left(6.0 \times 10^{-8} \times \beta^{1/4} \right) \times Rate^{1.5} + rfa$	β ≤ 20 20 < β

Measuring Receiver
Modulation Rate

Description	Specification	Supplemental Information
34.5 to 50 GHz Rate ≤ 2 kHz, 20 Hz ≤ Deviation	±(0.045 / Deviation) x Rate + rfa or ±0.000055 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.2 ≤ β	$\pm \left(\frac{2.0 \times 10^{-7}}{\beta} + 4.0 \times 10^{-7} \right) \times Rate^{1.5} + rfa \quad \beta \leq 20$ $\pm (1.6 \times 10^{-7} \times \beta^{1/4}) \times Rate^{1.5} + rfa \quad 20 < \beta$	

a. rfa = Modulation Rate × Frequency reference accuracy. Deviation is a frequency peak deviation in Hz, and Rate is a modulation rate in Hz.

Description	Specification	Supplemental Information
FM Rate Accuracy^a[Hz]		
<i>Option EPO</i>		
100 kHz to 3.6 GHz Rate ≤ 2 kHz	±(0.002 / Deviation) x Rate + rfa or ±0.000005 x Rate + rfa, whichever is larger	
2 kHz < Rate, 0.01 ≤ β	$\pm \left(\frac{2.0 \times 10^{-8}}{\beta} + 3.0 \times 10^{-8} \right) \times Rate^{1.5} + rfa \quad \beta \leq 20$ $\pm (1.5 \times 10^{-8} \times \beta^{1/4}) \times Rate^{1.5} + rfa \quad 20 < \beta$	
3.6 to 8.4 GHz Rate < 2 kHz	±(0.003 / Deviation) x Rate + rfa or ±0.00001 x Rate + rfa, whichever is larger	
2 kHz ≤ Rate, 0.02 ≤ β	$\pm \left(\frac{5.0 \times 10^{-8}}{\beta} + 8.0 \times 10^{-8} \right) \times Rate^{1.5} + rfa \quad \beta \leq 20$ $\pm (3.5 \times 10^{-8} \times \beta^{1/4}) \times Rate^{1.5} + rfa \quad 20 < \beta$	
8.4 to 13.6 GHz Rate < 2 kHz	±(0.007 / Deviation) x Rate + rfa or ±0.000008 x Rate + rfa, whichever is larger	
2 kHz ≤ Rate, 0.02 ≤ β	$\pm \left(\frac{6.0 \times 10^{-8}}{\beta} + 8.0 \times 10^{-8} \right) \times Rate^{1.5} + rfa \quad \beta \leq 100$ $\pm (2.5 \times 10^{-8} \times \beta^{1/4}) \times Rate^{1.5} + rfa \quad 100 < \beta$	
13.6 to 17.1GHz Rate < 2 kHz	±(0.007 / Deviation) x Rate + rfa or ±0.00001 x Rate + rfa, whichever is larger	
2 kHz ≤ Rate, 0.02 ≤ β	$\pm \left(\frac{8.0 \times 10^{-8}}{\beta} + 1.0 \times 10^{-7} \right) \times Rate^{1.5} + rfa \quad \beta \leq 100$ $\pm (3.0 \times 10^{-8} \times \beta^{1/4}) \times Rate^{1.5} + rfa \quad 100 < \beta$	
17.1 to 26.5 GHz Rate < 2 kHz	±(0.01 / Deviation) x Rate + rfa or ±0.000015 x Rate + rfa, whichever is larger	
2 kHz ≤ Rate, 0.05 ≤ β	$\pm \left(\frac{1.5 \times 10^{-7}}{\beta} + 1.5 \times 10^{-7} \right) \times Rate^{1.5} + rfa \quad \beta \leq 100$ $\pm (5.0 \times 10^{-8} \times \beta^{1/4}) \times Rate^{1.5} + rfa \quad 100 < \beta$	

Measuring Receiver
Modulation Rate

Description	Specification	Supplemental Information
26.5 to 34.5 GHz Rate < 2 kHz,	$\pm(0.015 / \text{Deviation}) \times \text{Rate} + \text{rfa}$ or $\pm 0.00002 \times \text{Rate} + \text{rfa}$, whichever is larger	
2 kHz \leq Rate, $0.05 \leq \beta$	$\pm \left(\frac{1.7 \times 10^{-7}}{\beta} + 1.7 \times 10^{-7} \right) \times \text{Rate}^{1.5} + \text{rfa}$ $\beta \leq 100$ $\pm (5.5 \times 10^{-8} \times \beta^{1/4}) \times \text{Rate}^{1.5} + \text{rfa}$ $100 < \beta$	
34.5 to 50 GHz Rate < 2 kHz 20 \leq Deviation @ 1kHz \leq Rate	$\pm(0.02 / \text{Deviation}) \times \text{Rate} + \text{rfa}$ or $\pm 0.00006 \times \text{Rate} + \text{rfa}$, whichever is larger	
2 kHz \leq Rate, $0.1 \leq \beta$	$\pm \left(\frac{3 \times 10^{-7}}{\beta} + 3.2 \times 10^{-7} \right) \times \text{Rate}^{1.5} + \text{rfa}$ $\beta \leq 20$ $\pm (1.7 \times 10^{-7} \times \beta^{1/4}) \times \text{Rate}^{1.5} + \text{rfa}$ $20 < \beta$	

a. rfa = Modulation Rate \times Frequency reference accuracy. Deviation is a frequency peak deviation in Hz, and Rate is a modulation rate in Hz.

Description	Specifications	Supplemental Information
AM Rate Accuracy^a[Hz]		
100 kHz to 3.6 GHz		
Rate < 100Hz	$\pm (4.0 \times 10^{-8} \times \frac{100\%}{\text{Depth}\%} \times \text{Rate}^{1.5}) + \text{rfa}$	
100Hz \leq Rate < 1kHz	$\pm (4.0 \times 10^{-8} \times \frac{100\%}{\text{Depth}\%} \times \text{Rate}) + \text{rfa}$	
1kHz \leq Rate	$\pm (5.0 \times 10^{-9} \times \frac{100\%}{\text{Depth}\%} \times \text{Rate}^{1.5}) + \text{rfa}$	
3.6 GHz to 8.4 GHz 5% \leq Depth		
Rate < 100Hz	$\pm (7.0 \times 10^{-8} \times \frac{100\%}{\text{Depth}\%} \times \text{Rate}^{1.5}) + \text{rfa}$	
100Hz \leq Rate < 1kHz	$\pm (7.0 \times 10^{-7} \times \frac{100\%}{\text{Depth}\%} \times \text{Rate}) + \text{rfa}$	
1kHz \leq Rate	$\pm (1.0 \times 10^{-8} \times \frac{100\%}{\text{Depth}\%} \times \text{Rate}^{1.5}) + \text{rfa}$	

Measuring Receiver
Modulation Rate

Description	Specifications	Supplemental Information
8.4 GHz to 13.6 GHz 5% ≤ Depth Rate < 100Hz 100Hz ≤ Rate < 1kHz 1kHz ≤ Rate	$\pm (1.2 \times 10^{-7} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$ $\pm (6 \times 10^{-6} \times \frac{100\%}{Depth\%} \times \sqrt{Rate}) + rfa$ $\pm (6.0 \times 10^{-9} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$	
13.6 GHz to 17.1 GHz 5% ≤ Depth Rate < 50Hz 50Hz ≤ Rate < 1kHz 1kHz ≤ Rate	$\pm (2.0 \times 10^{-7} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$ $\pm (1.0 \times 10^{-5} \times \frac{100\%}{Depth\%} \times \sqrt{Rate}) + rfa$ $\pm (1.0 \times 10^{-8} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$	
17.1 GHz to 26.5 GHz 5% ≤ Depth Rate < 50Hz 50Hz ≤ Rate ≤ 1kHz 1kHz < Rate	$\pm (4.0 \times 10^{-7} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$ $\pm (2.0 \times 10^{-5} \times \frac{100\%}{Depth\%} \times \sqrt{Rate}) + rfa$ $\pm (1.5 \times 10^{-8} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$	
26.5 GHz ≤ to 34.5 GHz 5% ≤ Depth Rate < 50Hz 50Hz ≤ Rate < 1kHz 1kHz < Rate	$\pm (8.0 \times 10^{-7} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$ $\pm (4.0 \times 10^{-5} \times \frac{100\%}{Depth\%} \times \sqrt{Rate}) + rfa$ $\pm (1.6 \times 10^{-8} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$	

Measuring Receiver
Modulation Rate

Description	Specifications	Supplemental Information
34.5 GHz to 50.0 GHz 20% ≤ Depth Rate < 50Hz 50Hz ≤ Rate < 1kHz 1kHz ≤ Rate	$\pm (1.4 \times 10^{-6} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$ $\pm (7.0 \times 10^{-5} \times \frac{100\%}{Depth\%} \times \sqrt{Rate}) + rfa$ $\pm (5.0 \times 10^{-8} \times \frac{100\%}{Depth\%} \times Rate^{1.5}) + rfa$	

a. rfa = Modulation Rate × Frequency reference accuracy.

Measuring Receiver
Modulation Rate

Description	Specifications	Supplemental Information
<p>PM Rate Accuracy^a[Hz]</p> <p><i>Option EP1</i></p> <p>100 kHz to 3.6 GHz 0.02 rad ≤ Deviation</p> <p>3.6 GHz to 8.4 GHz 0.05 rad ≤ Deviation</p> <p>8.4 GHz to 13.6 GHz 0.05 rad ≤ Deviation</p> <p>13.6 GHz to 17.1 GHz 0.05 rad ≤ Deviation</p> <p>17.1 GHz to 26.5 GHz 0.1 rad ≤ Deviation</p> <p>26.5 GHz to 34.5 GHz 0.2 rad ≤ Deviation</p> <p>34.6 GHz to 50 GHz 0.2 rad ≤ Deviation</p>	<p>$\pm (0.001 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p> <p>$\pm (0.0018 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p> <p>$\pm (0.0025 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p> <p>$\pm (0.003 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p> <p>$\pm (0.006 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p> <p>$\pm (0.008 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p> <p>$\pm (0.015 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1mHz whichever is larger</p>	

a. rfa = Modulation Rate × Frequency reference accuracy.

Measuring Receiver
Modulation Rate

Description	Specifications	Supplemental Information
PM Rate Accuracy^a[Hz] <i>Option EPO</i>		
100 kHz to 3.6 GHz 0.02 rad ≤ Deviation	$\pm (0.0002 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	
3.6 GHz to 8.4 GHz 0.05 rad ≤ Deviation	$\pm (0.0006 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	
8.4 GHz to 13.6 GHz 0.05 rad ≤ Deviation	$\pm (0.0006 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	
13.6 GHz to 17.1 GHz 0.05 rad ≤ Deviation	$\pm (0.0007 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	
17.1 GHz to 26.5 GHz 0.1 rad ≤ Deviation	$\pm (0.0012 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	
26.5 GHz to 34.5 GHz 0.2 rad ≤ Deviation	$\pm (0.0015 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	
34.6 GHz to 50 GHz 0.2 rad ≤ Deviation	$\pm (0.0035 \times \frac{Rate^{1/2}}{Deviation}) + rfa$ or 1 mHz whichever is larger	

a. rfa = Modulation Rate × Frequency reference accuracy.

Description	Specifications	Supplemental Information
Displayed Resolution	1 mHz	
Measurement Rate		2 readings/second

Modulation Distortion

Description	Specification	Supplemental Information
Display Range	0.01% to 100% (-80 to 0 dB)	
Displayed Resolution	0.001% (0.001 dB)	
Post-Demod Distortion Measurement Accuracy		
FM		
Distortion	$\pm(0.02 \times \text{reading} + \text{DistResidual})$	
THD	$\pm(0.02 \times \text{reading} + \text{THDResidual})$	
AM		
Distortion	$\pm(0.01 \times \text{reading} + \text{DistResidual})$	
THD	$\pm(0.02 \times \text{reading} + \text{THDResidual})$	
PM		
Distortion	$\pm(0.02 \times \text{reading} + \text{DistResidual})$	(Rate: 100 Hz to 1 MHz, deviation: 0.01 to 10000)
THD	$\pm(0.02 \times \text{reading} + \text{THDResidual})$	
Sensitivity		
Modulation		See "Post-Demod Distortion Residual" below for minimum modulation levels.

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
Post-Demod Distortion Residual		
FM		
Distortion (SINAD) ² [%]		
100 kHz to 3.6 GHz		
Rate ≤ 2 kHz	$80 / \text{Deviation} + 0.00004 \times \text{Deviation}^{1/2} + 0.08$	
2 kHz < Rate, $0.01 \leq \mathbf{B}$	$0.0007 \times \text{Rate}^{1/2} / \mathbf{B} + 0.0015 \times \text{Rate}^{1/2} + 0.000005 \times \text{Deviation}^{1/2}$	
3.6 GHz to 8.4 GHz		
Rate ≤ 2 kHz	$110 / \text{Deviation} + 0.00008 \times \text{Deviation}^{1/2} + 0.08$	
2 kHz < Rate, $0.01 \leq \mathbf{B}$	$0.0015 \times \text{Rate}^{1/2} / \mathbf{B} + 0.0015 \times \text{Rate}^{1/2} + 0.0001 \times \text{Deviation}^{1/2}$	
8.4 GHz to 13.6 GHz		
Rate ≤ 2 kHz	$160 / \text{Deviation} + 0.00008 \times \text{Deviation}^{1/2} + 0.08$	
2 kHz < Rate, $0.01 \leq \mathbf{B}$	$0.0018 \times \text{Rate}^{1/2} / \mathbf{B} + 0.0015 \times \text{Rate}^{1/2} + 0.0001 \times \text{Deviation}^{1/2}$	
13.6 GHz to 17.1 GHz		
Rate ≤ 2 kHz	$200 / \text{Deviation} + 0.00008 \times \text{Deviation}^{1/2} + 0.08$	
2 kHz < Rate, $0.01 \leq \mathbf{B}$	$0.0025 \times \text{Rate}^{1/2} / \mathbf{B} + 0.002 \times \text{Rate}^{1/2} + 0.0001 \times \text{Deviation}^{1/2}$	
17.1 GHz to 26.5 GHz		
Rate ≤ 2 kHz	$300 / \text{Deviation} + 0.00015 \times \text{Deviation}^{1/2} + 0.1$	
2 kHz < Rate, $0.01 \leq \mathbf{B}$	$0.0035 \times \text{Rate}^{1/2} / \mathbf{B} + 0.0025 \times \text{Rate}^{1/2} + 0.00015 \times \text{Deviation}^{1/2}$	
26.5 GHz to 34.5 GHz		
Rate ≤ 2 kHz	$400 / \text{Deviation} + 0.0002 \times \text{Deviation}^{1/2} + 0.1$	
2 kHz < Rate, $0.01 \leq \mathbf{B}$	$0.0045 \times \text{Rate}^{1/2} / \mathbf{B} + 0.0025 \times \text{Rate}^{1/2} + 0.00018 \times \text{Deviation}^{1/2}$	
34.5 GHz to 50 GHz		
Rate ≤ 2 kHz	$700 / \text{Deviation} + 0.0006 \times \text{Deviation}^{1/2} + 0.16$	
2 kHz < Rate, $0.2 \leq \mathbf{B}$	$0.007 \times \text{Rate}^{1/2} / \mathbf{B} + 0.004 \times \text{Rate}^{1/2} + 0.0006 \times \text{Deviation}^{1/2}$	

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
AM		
Distortion (SINAD) ^a		
100 kHz to 3.6 GHz	$= 0.0002 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.02 \text{ [%]}$	
3.6 GHz to 8.4 GHz	$= 0.0004 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.01 \text{ [%]}$	
8.4 GHz to 13.6 GHz	$= 0.0003 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.01 \text{ [%]}$	
13.6 GHz to 17.1 GHz	$= 0.0004 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.01 \text{ [%]}$	
17.1 GHz to 34.5 GHz 100 Hz ≤ Rate ≤ 500 kHz, 1% ≤ Depth ≤ 99% 500 kHz < Rate, 2% ≤ Depth ≤ 99%	$= 0.0007 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.02 \text{ [%]}$	
34.5 GHz to 50 GHz 100 ≤ Rate ≤ 50 kHz, 1% ≤ Depth ≤ 99% 50 kHz < Rate ≤ 200 kHz, 2% ≤ Depth ≤ 99% 200 kHz < Rate ≤ 1 MHz, 5% ≤ Depth ≤ 99%	$= 0.0025 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.05 \text{ [%]}$	
PM		
Distortion (SINAD) ^a		
<i>Option EP1</i>		
100 kHz to 3.6 GHz Rate ≤ 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.4 / Deviation + 0.01[%] 0.8 / Deviation + 0.01[%]	
3.6 GHz to 8.4 GHz Rate ≤ 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.75 / Deviation + 0.01[%] 1.1 / Deviation + 0.01[%]	
8.4 GHz to 13.6 GHz Rate ≤ 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.4 / Deviation + 0.01[%] 1.3 / Deviation + 0.01[%]	
13.6 GHz to 17.1 GHz Rate ≤ 100 kHz 100 kHz < Rate, Deviation < 100 rad	1.6 / Deviation + 0.01[%] 1.6 / Deviation + 0.01[%]	
17.1 GHz to 26.5 GHz Rate ≤ 100 kHz 100 kHz < Rate, Deviation < 100 rad	3.0 / Deviation + 0.01[%] 2.5 / Deviation + 0.01[%]	

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
26.5 GHz to 34.5 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	3.5 / Deviation + 0.01[%] 3.0 / Deviation + 0.01[%]	
34.5 GHz to 50 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	5.0 / Deviation + 0.01[%] 5.5 / Deviation + 0.01[%]	
PM		
Distortion (SINAD) ^a		
<i>Option EPO</i>		
100 kHz to 3.6 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.15 / Deviation + 0.01[%] 0.8 / Deviation + 0.01[%]	
3.6 GHz to 8.4 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.4 / Deviation + 0.01[%] 0.9 / Deviation + 0.01[%]	
8.4 GHz to 13.6 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.5 / Deviation + 0.01[%] 0.9 / Deviation + 0.01[%]	
13.6 GHz to 17.1 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.55 / Deviation + 0.01[%] 1.1 / Deviation + 0.01[%]	
17.1 GHz to 26.5 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	0.8 / Deviation + 0.01[%] 1.5 / Deviation + 0.02[%]	
26.5 GHz to 34.5 GHz Rate \leq 100 kHz 100 kHz < Rate, Deviation < 100 rad	1.0 / Deviation + 0.01[%] 1.6 / Deviation + 0.02[%]	
34.5 GHz to 50 GHz Rate \leq 20 kHz 20 kHz < Rate, Deviation < 500 rad	1.5 / Deviation + 0.01[%] 4.0 / Deviation + 0.02[%]	

a. SINAD [dB] can be derived by $20 \times \log_{10}(1/\text{Distortion})$.

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
Post-Demod Distortion Residual		
FM		
THD[%]		
100 kHz to 3.6 GHz		
Rate \leq 100 kHz, $0.01 \leq \mathbf{B}$	$0.35 / \mathbf{B}^{1/2}$	
100 kHz < Rate $0.01 \leq \mathbf{B} < 0.1$ $0.1 \leq \mathbf{B} < 10$ $10 \leq \mathbf{B}$	$0.0001 / \mathbf{B} \times \text{Rate}^{1/2}$ $0.001 \times \text{Rate}^{1/2}$ $0.003 / \mathbf{B}^{1/2} \times \text{Rate}^{1/2}$	
3.6 GHz to 8.4 GHz		
Rate \leq 20 kHz, $0.01 \leq \mathbf{B}$	$0.4 / \mathbf{B}^{1/2}$	
20 kHz < Rate $0.01 \leq \mathbf{B} < 0.1$ $0.1 \leq \mathbf{B} < 5$ $5 \leq \mathbf{B}$	$0.00015 / \mathbf{B} \times \text{Rate}^{1/2}$ $0.0015 \times \text{Rate}^{1/2}$ $0.0035 / \mathbf{B}^{1/2} \times \text{Rate}^{1/2}$	
8.4 GHz to 17.1 GHz		
Rate \leq 20 kHz, $0.01 \leq \mathbf{B}$	$0.5 / \mathbf{B}^{1/2}$	
20 kHz < Rate $0.01 \leq \mathbf{B} < 0.2$ $0.2 \leq \mathbf{B} < 5$ $5 \leq \mathbf{B}$	$0.0003 / \mathbf{B} \times \text{Rate}^{1/2}$ $0.0015 \times \text{Rate}^{1/2}$ $0.0035 / \mathbf{B}^{1/2} \times \text{Rate}^{1/2}$	
17.1 GHz to 26.5 GHz		
Rate \leq 50 kHz, $0.01 \leq \mathbf{B}$	$0.5 / \mathbf{B}^{1/2}$	
50 kHz < Rate $0.01 \leq \mathbf{B} < 0.2$ $0.2 \leq \mathbf{B} < 5$ $5 \leq \mathbf{B}$	$0.0003 / \mathbf{B} \times \text{Rate}^{1/2}$ $0.0015 \times \text{Rate}^{1/2}$ $0.0035 / \mathbf{B}^{1/2} \times \text{Rate}^{1/2}$	
26.5 GHz to 34.5 GHz		
Rate \leq 50 kHz, $0.01 \leq \mathbf{B}$	$0.6 / \mathbf{B}^{1/2}$	
50 kHz < Rate $0.02 \leq \mathbf{B} < 0.2$ $0.2 \leq \mathbf{B} < 5$ $5 \leq \mathbf{B}$	$0.0003 / \mathbf{B} \times \text{Rate}^{1/2}$ $0.0015 \times \text{Rate}^{1/2}$ $0.0035 / \mathbf{B}^{1/2} \times \text{Rate}^{1/2}$	
34.5 GHz to 50 GHz		
Rate \leq 10 kHz, $0.05 \leq \mathbf{B}$	$0.8 / \mathbf{B}^{1/2}$	

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
10 kHz < Rate $0.05 \leq \beta < 1$ $1 \leq \beta < 10$ $10 \leq \beta$	$0.0003 / \beta \times \text{Rate}^{1/2}$ $0.002 \times \text{Rate}^{1/2}$ $0.005 / \beta^{1/2} \times \text{Rate}^{1/2}$	
AM		
THD		
100 kHz to 3.6 GHz	$= 0.00003 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.02 [\%]$	
3.6 GHz to 8.4 GHz	$= 0.00007 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.01 [\%]$	
8.4 GHz to 13.6 GHz 100 Hz ≤ Rate	$= 0.00004 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.01 [\%]$	
13.6 GHz to 17.1 GHz 100 Hz ≤ Rate	$= 0.00006 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.02 [\%]$	
17.1 GHz to 26.5 GHz 100 Hz ≤ Rate ≤ 500 kHz, 1% ≤ Depth ≤ 99% 500 kHz < Rate, 2% ≤ Depth ≤ 99%	$= 0.00009 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.02 [\%]$	
26.5 GHz to 34.5 GHz 100 Hz ≤ Rate ≤ 500 kHz, 1% ≤ Depth ≤ 99% 500 kHz < Rate, 2% ≤ Depth ≤ 99%	$= 0.0001 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.02 [\%]$	
34.5 GHz to 50 GHz 100 Hz ≤ Rate ≤ 50 kHz, 1% ≤ Depth ≤ 99% 50 kHz < Rate ≤ 200 kHz, 2% ≤ Depth ≤ 99% 200 kHz < Rate, 5% ≤ Depth ≤ 99%	$= 0.00035 \times \left(\frac{100\%}{\text{Depth}\%} \right) \times \sqrt{\frac{\text{Rate}[\text{Hz}]}{1\text{Hz}}} + 0.04 [\%]$	
PM		
THD		
<i>Option EP1</i>		
100 kHz to 3.6 GHz Rate ≤ 100 kHz 100 kHz < Rate	$0.1 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.3[\%]$ whichever is smaller	
3.6 GHz to 8.4 GHz Rate ≤ 50 kHz 50 kHz < Rate, and $0.02 \leq \text{Deviation}$	$0.15 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.3[\%]$ whichever is smaller	

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
8.4 GHz to 13.6 GHz Rate \leq 50 kHz and $0.02 \leq$ Deviation 50 kHz < Rate, and $0.02 \leq$ Deviation	$0.15 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.4[\%]$ whichever is smaller	
13.6 GHz to 17.1 GHz Rate \leq 50 kHz and $0.02 \leq$ Deviation 50 kHz < Rate, and $0.02 \leq$ Deviation	$0.2 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.4[\%]$ whichever is smaller	
17.1 GHz to 26.5 GHz Rate \leq 100 kHz and $0.05 \leq$ Deviation 100 kHz < Rate, and $0.05 \leq$ Deviation	$0.2 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.9 / \text{Deviation} + 0.005[\%]$ or $0.4[\%]$ whichever is smaller	
26.5 GHz to 34.5 GHz Rate \leq 100 kHz and $0.05 \leq$ Deviation 100 kHz < Rate, and $0.05 \leq$ Deviation	$0.3 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.4[\%]$ whichever is smaller	
34.5 GHz to 50 GHz Rate \leq 100 kHz and $0.1 \leq$ Deviation 100 kHz < Rate, and $0.1 \leq$ Deviation	$0.3 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.9 / \text{Deviation} + 0.005[\%]$ or $0.4[\%]$ whichever is smaller	
PM		
THD		
<i>Option EPO</i>		
100 kHz to 3.6 GHz Rate \leq 100 kHz 100 kHz < Rate	$0.1 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.3[\%]$ whichever is smaller	
3.6 GHz to 8.4 GHz Rate \leq 100 kHz 100 kHz < Rate, $0.02 \leq$ Deviation	$0.2 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.3[\%]$ whichever is smaller	
8.4 GHz to 13.6 GHz Rate \leq 100 kHz 100 kHz < Rate	$0.2 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or $0.3[\%]$ whichever is smaller	
13.6 GHz to 17.1 GHz Rate \leq 100 kHz 100 kHz < Rate	$0.2 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.9 / \text{Deviation} + 0.005[\%]$ or $0.4[\%]$ whichever is smaller	

Measuring Receiver
Modulation Distortion

Description	Specification	Supplemental Information
17.1 GHz to 26.5 GHz Rate \leq 100 kHz 100 kHz < Rate, 0.02 \leq Deviation	$0.2 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.9 / \text{Deviation} + 0.005[\%]$ or 0.4[%] whichever is smaller	
26.5 GHz to 34.5 GHz Rate \leq 100 kHz 100 kHz < Rate, 0.02 \leq Deviation	$0.3 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.8 / \text{Deviation} + 0.005[\%]$ or 0.4[%] whichever is smaller	
34.5 GHz to 50 GHz Rate \leq 100 kHz, 0.02 \leq Deviation 100 kHz < Rate, 0.05 \leq Deviation	$0.3 / \text{Deviation}^{1/2} + 0.005[\%]$ $0.9 / \text{Deviation} + 0.005[\%]$ or 0.4[%] whichever is smaller	

Modulation SINAD

Description	Specification	Supplemental Information
Display Range	0.00 to 80 dB	
Displayed Resolution	0.001 dB	
Accuracy^a	≤ 1 dB	Defaulted display in dB. It can be converted into linear term using % = $(1 - 10^{-(A \text{ dB}/20)}) \times 100\%$.

- a. Measured distortion must be greater than 3% for the accuracy specification to apply. For distortions less than 3%, the noise floor of the analyzer will begin to affect the accuracy of the measurement.

Description	Specification	Supplemental Information
Post-Demod Distortion Residual		Refer to “Post-Demod Distortion Residual” on page 401.

Modulation Filters

Description	Specification	Supplemental Information
Filter Flatness^{ab}		Nominal
20 Hz High-Pass Filter		-3 dB at 20 Hz; Type: 2-pole Butterworth
50 Hz High-Pass Filter	±1% flatness at > 175 Hz	-3 dB at 50 Hz; Type: 2-pole Butterworth
300 Hz High-Pass Filter	±1% flatness at > 950 Hz	-3 dB at 300 Hz; Type: 2-pole Butterworth
400 Hz High-Pass Filter	±1% flatness at > 550 Hz	-3 dB at 400 Hz; Type: 10-pole Butterworth
3 kHz Low-Pass Filter	±1% flatness at < 1.5 kHz	-3 dB at 3 kHz; Type: 5-pole Butterworth,
15 kHz Low-Pass Filter	±1% flatness at < 9 kHz	-3 dB at 15 kHz; Type: 5-pole Butterworth,
30 kHz Low-Pass Filter	±1% flatness at < 13.5 kHz	-3 dB at 30 kHz; Type: 3-pole Butterworth
80 kHz Low-Pass Filter	±1% flatness at < 38.5 kHz	-3 dB at 80 kHz; Type: 3-pole Butterworth
300 kHz Low-Pass Filter	±1% flatness at < 285 kHz	-3 dB at 300 kHz; Type: 3-pole Butterworth,
De-Emphasis Filters	25 μs, 50 μs, 75 μs, and 750 μs	De-emphasis filters are single-pole, low-pass filters with nominal -3 dB frequencies of: 6,366 Hz for 25 μs, 3,183 Hz for 50 μs, 2,122 Hz for 75 μs, and 212 Hz for 750 μs.
Deviation from Ideal De-Emphasis Filter	< 0.4 dB, or < 3°	Applicable to 25 μs, 50 μs, and 75 μs filters. With 3 kHz Low-Pass filter and IFBW Mode set to "minimal".

- All filters asymptotically approach -6 dB per octave or -20 dB per decade, times number of poles, in the stop-band (nom).
- The specified frequency for which the filter passband response stays <1% flatness is a 'worst case' based on a very high IFBW of 500 kHz. As IFBW is reduced, this frequency moves closer to the -3 dB cutoff frequency; i.e. the 1% flatness range applies to more of the pass-band, and the filter shape becomes closer to ideal.

RF Frequency Counter

Description	Specification	Supplemental Information
Range^a	100 kHz to 50 GHz	
Sensitivity^b		In “Auto” mode
100 kHz $\leq f_c <$ 3.6 GHz	0.4 mV _{rms} (–55 dBm)	
3.6 GHz $\leq f_c <$ 26.5 GHz	1.3 mV _{rms} (–45 dBm)	
26.5 GHz $\leq f_c <$ 50 GHz	4.0 mV _{rms} (–35 dBm)	
Maximum Resolution	0.001 Hz	
Accuracy^c	$\pm(\text{readout freq.} \times \text{rfa} + 0.100 \text{ Hz})$	Internal ref. See notes ^{de}
Accuracy (For $f_c <$ 100 MHz)	$\pm(\text{readout freq.} \times \text{rfa} + 0.002 \text{ Hz})^f$	$\pm(\text{readout freq.} \times \text{rfa} + 0.001 \text{ Hz})$ (99th percentile, or $\sim 2.576\sigma$).
Modes		Frequency and Frequency Error (manual tuning)
Sensitivity in Manual Tuning Mode		Using manual ranging and changing RBW settings, sensitivity can be increased to approximately –100 dBm.

- When the U5532C or N5532A/B sensor module is used for the measurement, the frequency range may be limited by the sensor module’s maximum frequency.
- Instrument condition: $\text{RBW} \leq 1 \text{ kHz}$
- The first term is the reference frequency accuracy (rfa) of the internal timebase within the PXA, scaled by input frequency. This term normally dominates. If locked to an external timebase reference, then specs of this user-supplied clock apply. The second term (0.1 Hz) reflects measurement noise; it will increase with phase noise (of signal input), poor S/N ratios, wider analyzer RBWs, and higher frequencies.
- Verified at 1 GHz with $\text{RBW} = 1 \text{ kHz}$, gate time = 0.1 s (autocoupled), $\text{SNR} = 50 \text{ dB}$.
- While the first term scales obviously with frequency, the second term also scales (weakly) with frequency; the nominal standard deviation of the measurement is 0.003Hz per GHz of f_c for $\text{RBW} = 1,000\text{Hz}$, gate time = 0.1s. This term is insignificant except for the case where analyzer (and source) is locked to excellent external same time base, and the source has low phase noise. It can be reduced by narrow RBW, longer gate times, and averaging, but at some frequencies not necessarily below 0.003 Hz.
- For the special case of $F_c < 100 \text{ MHz}$, $\text{RBW} = 300 \text{ Hz}$, and gate time = 0.5 s, the second term is $< 0.002 \text{ Hz}$ (3-sigma). The 0.002 Hz term includes noisiness as well as mean errors that occur at some frequencies, and thus cannot necessarily be reduced with averaging.

Audio Input¹

Description	Specification	Supplemental Information
Frequency Range		
AC Coupled	20 Hz to 250 kHz	
DC Coupled		5 Hz to 250 kHz (nominal)
Input Impedance		100 k Ω (nominal)
Maximum Safe Input Level		
AC Coupled	7 Vrms, or 20 Vdc	
DC Coupled	7 Vrms, or 0 Vdc	

Audio Frequency Counter¹

Description	Specification	Supplemental Information
Frequency Range		
AC Coupled	20 Hz to 250 kHz	
DC Coupled		5 Hz to 250 kHz (nominal)
Accuracy^a		
f < 1 kHz	$\pm(0.02 \text{ Hz} + f \times \text{Internal Reference Accuracy})^b$	
f \geq 1 kHz	± 3 counts of the first 6 significant digits $\pm f \times (\text{Internal Reference Accuracy})^b$	
Resolution	0.01 Hz (8 digits)	
Sensitivity	$\leq 5 \text{ mV}$	Nominally applies to "DC Coupled".

- a. Follow this procedure to verify this specification:
Set an input audio signal at 100 mV. Set the PXA as follows: (1) Auto Level, (2) Auto IF BW, (3) LP is greater than the audio frequency, (4) HP=300 Hz or less than the audio frequency, (5) Average = 5 Repeat.
- b. Refer to the Frequency Reference section in the PXA base specifications.

1. PXA Option 107 is required. All specifications in this section are for the "AC Coupled" audio signal path and nominally apply to the "DC Coupled" path, unless otherwise stated.

Measuring Receiver
Audio Input

Audio AC Level¹

Description	Specification	Supplemental Information
Frequency Range		
AC Coupled	20 Hz to 250 kHz	
DC Coupled		5 Hz to 250 kHz (nominal)
Measurement Level Range	100 mV rms to 3V rms	
Accuracy	1% of reading	
Detector Mode		RMS

Audio Distortion¹

Description	Specification	Supplemental Information
Display Range (20 Hz^a to 250 kHz BW)	0.01% to 100% (–80 to 0 dB)	
Accuracy^b		Nominal
AC Coupled	± 1 dB of reading (20 Hz to 20 kHz) ± 2 dB of reading (20 to 80 kHz) ^c	± 0.3 dB of reading (20 Hz to 200 kHz)
DC Coupled		± 0.7 dB of reading (5 to 20 Hz) ± 0.3 dB of reading (20 Hz to 200 kHz)
Residual Noise and Distortion	< 0.3% (–50.4 dB)	< 0.063% (–64 dB) (nominal)
Total Noise		–73.2 dB characteristic performance
Total Distortion		–74.8 dB characteristic performance

a. Starts from 5 Hz for "DC Coupled".

b. Verified in dB; can be converted into linear term in % using formula of % = $(1 - 10^{-(A \text{ dB}/20)}) \times 100\%$.

c. Verification is performed for the audio frequency up to 80 kHz due to the technical limitation of test equipment used.

1. PXA Option 107 is required. All specifications in the tables are for "AC Coupled" but also nominally applies to "DC Coupled" unless otherwise specified.

Audio SINAD ¹

Description	Specification	Supplemental Information
Display Range (20 Hz^a to 250 kHz BW)	0.00 to 80 dB	Nominal
Display Resolution	0.001 dB	
Accuracy		
AC Coupled	± 1 dB of reading (20 Hz to 20 kHz)	
DC Coupled	± 2 dB of reading (20 to 80 kHz) ^b	± 0.7 dB of reading (5 to 20 Hz) ± 0.3 dB of reading (20 Hz to 200 kHz)
Residual Noise and Distortion	50.4 dB	64 dB (nominal)
Total Noise		73.2 dB characteristic performance
Total Distortion		74.8 dB characteristic performance

a. Starts from 5 Hz for "DC Coupled".

b. Verification is performed for the audio frequency up to 80 kHz due to the technical limitation of test equipment used.

1. PXA Option 107 is required. All specifications in the tables are for "AC Coupled" but also nominally applies to "DC Coupled" unless otherwise specified.

Audio Filters¹

Description	Specification	Supplemental Information
Filter Flatness^a		Nominal
20 Hz High-Pass Filter		-3 dB at 20 Hz (nominal); Type: 2-pole Butterworth
50 Hz High-Pass Filter	< ±1% at >175 Hz	-3 dB at 50 Hz (nominal); Type: 2-pole Butterworth
300 Hz High-Pass Filter	< ±1% at >950 Hz	-3 dB at 300 Hz (nominal); Type: 2-pole Butterworth
400 Hz High-Pass Filter	< ±1% at >550 Hz	-3 dB at 400 Hz (nominal); Type: 10-pole Butterworth
3 kHz Low-Pass Filter	< ±1% at <1.5 kHz	-3 dB at 3.030 kHz (nominal); Type: 5-pole Butterworth
15 kHz Low-Pass Filter	< ±1% at <9 kHz	-3 dB at 15.030 kHz (nominal); Type: 5-pole Butterworth
30 kHz Low-Pass Filter	< ±1% at <13.5 kHz	-3 dB at 30.000 kHz (nominal); Type: 3-pole Butterworth
80 kHz Low-Pass Filter	< ±1% at <38.5 kHz	-3 dB at 80.000 kHz (nominal); Type: 3-pole Butterworth
> 300 kHz Low-Pass Filter	< ±1% at <285 kHz	-3 dB at 300 kHz (nominal); Type: 3-pole Butterworth
CCITT Weighting Filter Deviation from the Ideal CCITT filter Response	CCITT Recommendation P53 ±0.2 dB at 800 Hz ±1.0 dB, 300 Hz to 3 kHz ±2.0 dB, 50 to 300 Hz and 3 to 3.5 kHz ±3.0 dB, 3.5 to 5 kHz	
De-Emphasis Filters	25 μs, 50 μs, 75 μs, and 750 μs	De-emphasis filters are single-pole, low-pass filters with nominal -3 dB frequencies of: 6,366 Hz for 25 μs, 3,183 Hz for 50 μs, 2,122 Hz for 75 μs, and 212 Hz for 750 μs.
Deviation from Ideal De-Emphasis Filter	< 0.4 dB, or < 3°	Applicable to 25 μs, 50 μs, and 75 μs filters. With 3 kHz Low-Pass filter and IFBW Mode set to "minimal".

- a. All filters asymptotically approach -6 dB per octave or -20 dB per decade, times number of poles, in the stop-band (nominal).

1. PXA Option 107 is required.

RF Power^{1 2}

The Keysight N5531X measuring receiver with the U5532C USB sensor modules, or with the N5532A/B sensor modules performs RF power measurements from -10 dBm ($100 \mu\text{W}$) to $+30$ dBm (1 W).

-
1. The N5531X measuring receiver supports Keysight U5532C USB sensor modules, or the combination of N5532B/A sensor modules and a variety of power meters including Keysight EPM Series (N1913A/B, N1914A/B), P-Series (N1911A, N1912A), and legacy Agilent EPM/EPM-P (E4416A, E4417A, E4418B, and E4419B). A LAN/GPIB gateway may be required if the legacy EPM/EPM-P Series power meter (E441xA/B) is used. For latest specification updates refer to N1911A/N1912A, N1913A/B or N1914A/B, E4416A/17A and E4418B/19B power meter User's Guides.
 2. The N5531X RF Power Accuracy is derived from the Keysight power meter accuracy. The parameters listed in this section are components used to calculate the RF Power Accuracy. Application Note 1449-3 (P/N 5988-9215EN) does an excellent job of explaining how the components are combined to derive an overall accuracy number. Absolute and relative accuracy specifications do not include mismatch uncertainty.

Measuring Receiver
RF Power

Description	Specification				Supplemental Information			
RF Power Accuracy (dB)					Typicals			
Power Meter Range 1	Sensor module options				Sensor module options			
+20 to +30 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz $\leq f_c \leq$ 10 MHz	± 0.287	–	–	–	± 0.146	–	–	–
10 MHz $< f_c \leq$ 30 MHz	± 0.287	± 0.287	$\pm 0.287^a$	–	± 0.146	± 0.146	$\pm 0.146^a$	–
30 MHz $< f_c \leq$ 2 GHz	± 0.287	± 0.287	± 0.287	± 0.265	± 0.146	± 0.146	± 0.146	± 0.135
2 GHz $< f_c \leq$ 4.2 GHz	± 0.302	± 0.302	± 0.302	± 0.279	± 0.146	± 0.154	± 0.146	± 0.142
4.2 GHz $< f_c \leq$ 18 GHz	–	± 0.466	± 0.468	± 0.342	–	± 0.240	± 0.241	± 0.175
18 GHz $< f_c \leq$ 26.5 GHz	–	–	± 0.386	± 0.332	–	–	± 0.198	± 0.170
26.5 GHz $< f_c \leq$ 50 GHz	–	–	–	± 0.363	–	–	–	± 0.186
					Typicals			
Power Meter Range 2	Sensor module options				Sensor module options			
0 to $<$ +20 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz $\leq f_c \leq$ 10 MHz	± 0.222	–	–	–	± 0.113	–	–	–
10 MHz $< f_c \leq$ 30 MHz	± 0.222	± 0.222	$\pm 0.222^a$	–	± 0.113	± 0.113	$\pm 0.113^a$	–
30 MHz $< f_c \leq$ 2 GHz	± 0.222	± 0.222	± 0.222	± 0.191	± 0.113	± 0.113	± 0.113	± 0.097
2 GHz $< f_c \leq$ 4.2 GHz	± 0.222	± 0.242	± 0.242	± 0.211	± 0.113	± 0.123	± 0.123	± 0.107
4.2 GHz $< f_c \leq$ 18 GHz	–	± 0.432	± 0.433	± 0.291	–	± 0.222	± 0.223	± 0.148
18 GHz $< f_c \leq$ 26.5 GHz	–	–	± 0.342	± 0.279	–	–	± 0.175	± 0.142
26.5 GHz $< f_c \leq$ 50 GHz	–	–	–	± 0.316	–	–	–	± 0.161
					Typicals			
Power Meter Range 3	Sensor module options				Sensor module options			
–5 to $<$ 0 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz $\leq f_c \leq$ 10 MHz	± 0.220	–	–	–	± 0.112	–	–	–
10 MHz $< f_c \leq$ 30 MHz	± 0.220	± 0.219	$\pm 0.220^a$	–	± 0.112	± 0.111	$\pm 0.112^a$	–
30 MHz $< f_c \leq$ 2 GHz	± 0.220	± 0.219	± 0.220	± 0.189	± 0.112	± 0.111	± 0.112	± 0.097
2 GHz $< f_c \leq$ 4.2 GHz	± 0.240	± 0.219	± 0.240	± 0.209	± 0.122	± 0.122	± 0.122	± 0.106
4.2 GHz $< f_c \leq$ 18 GHz	–	± 0.240	± 0.432	± 0.289	–	± 0.122	± 0.222	± 0.148
18 GHz $< f_c \leq$ 26.5 GHz	–	–	± 0.341	± 0.277	–	–	± 0.174	± 0.141

Measuring Receiver
RF Power

Description	Specification				Supplemental Information			
26.5 GHz < f_c ≤ 50 GHz	–	–	–	±0.315	–	–	–	±0.161
Power Meter Range 4	Sensor module options				Sensor module options			
–10 to < –5 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz ≤ f_c ≤ 10 MHz	±0.229	–	–	–	±0.117	–	–	–
10 MHz < f_c ≤ 30 MHz	±0.229	±0.229	±0.229 ^a	–	±0.117	±0.117	±0.117 ^a	–
30 MHz < f_c ≤ 2 GHz	±0.229	±0.229	±0.229	±0.200	±0.117	±0.117	±0.117	±0.102
2 GHz < f_c ≤ 4.2 GHz	±0.249	±0.249	±0.249	±0.219	±0.127	±0.127	±0.127	±0.111
4.2 GHz < f_c ≤ 18 GHz	–	±0.435	±0.437	±0.296	–	±0.224	±0.225	±0.151
18 GHz < f_c ≤ 26.5 GHz	–	–	±0.347	±0.285	–	–	±0.178	±0.145
26.5 GHz < f_c ≤ 50 GHz	–	–	–	±0.321	–	–	–	±0.164
RF Power Resolution								
Display resolution	0.001 dB							

a. For U5532C only.

Description	Specification	Supplemental Information
Instrumentation Accuracy		
Logarithmic	±0.02 dB	
Linear	±0.5%	
Input SWR		
U5532C Option 504 N5532A/B Option 504		
100 kHz to 2 GHz	< 1.10:1 ($\rho = 0.048$)	
2 GHz to 4.2 GHz	< 1.28:1 ($\rho = 0.123$)	
U5532C Option 518 N5532A/B Option 518		
10 MHz to 2 GHz	< 1.10:1 ($\rho = 0.048$)	
2 GHz to 18 GHz	< 1.28:1 ($\rho = 0.123$)	
U5532C Option 526 N5532A/B Option 526		
10 MHz to 30 MHz	< 1.10:1 ($\rho = 0.048$)	For U5532C-526 only
30 MHz to 2 GHz	< 1.10:1 ($\rho = 0.048$)	

Measuring Receiver
RF Power

Description	Specification	Supplemental Information
2 GHz to 18 GHz	< 1.28:1 ($\rho = 0.123$)	
18 GHz to 26.5 GHz	< 1.40:1 ($\rho = 0.167$)	
U5532C Option 550 N5532A/B Option 550		
30 MHz to 2 GHz	< 1.10:1 ($\rho = 0.048$)	
2 GHz to 18 GHz	< 1.28:1 ($\rho = 0.123$)	
18 GHz to 26.5 GHz	< 1.40:1 ($\rho = 0.167$)	
26.5 GHz to 33 GHz	< 1.55:1 ($\rho = 0.216$)	
33 GHz to 40 GHz	< 1.70:1 ($\rho = 0.259$)	
40 GHz to 50 GHz	< 1.75:1 ($\rho = 0.272$)	

Measuring Receiver
RF Power

Description	Specification	Supplemental Information
<p>Zero Set and Measurement Noise^a</p> <p>U5532C Options 504, 518, 526, and 550 N5532A/B Options 504, 518, 526, and 550</p>	<p>± 500 nW ± 680 nW</p>	
<p>Zero Drift of Sensors</p> <p>U5532C Options 504, 518, 526, and 550 N5532A/B Options 504, 518, 526, and 550</p>	<p>< 70 nW < 100 nW</p>	<p>(1 hour, at constant temperature after 24 hour warm-up)</p>
<p>RF Power Ranges of N5531X with U5532C or N5532A/B Sensor Modules</p>	<p>–20 dBm (10 μW) to +30 dBm (1 W)</p>	<p>One range for power sensors</p>
<p>Response Time (0 to 99% of reading)</p>		<p>150 ms × number of averages (nominal)</p>
<p>Displayed Units</p>	<p>dBm, Watts, Volts, dBmV, or dBuV</p>	

a. Since Zero Set and Measurement Noise cannot be separated, the two components are combined as one error term.

Measuring Receiver
RF Power


Power Reference (P-Series, EPM and EPM-P Series Specifications)

Description	Specification	Supplemental Information
Power Output		Power output is traceable to the U.S. National Institute of Standards and Technology (NIST) and National Physical Laboratories (NPL), UK.
N1911A/N1912A	1.00 mW (0.0 dBm). Factory set to $\pm 0.4\%$	
N1913A/N1914A	1.00 mW (0.0 dBm). Factory set to $\pm 0.4\%$	
N1913A/B or N1914A/B	1.00 mW (0.0 dBm). Factory set to $\pm 0.4\%$	
E4418B/E4419B	1.00 mW (0.0 dBm). Factory set to $\pm 0.4\%$	
Accuracy		
N1911A/N1912A	$\pm 0.4\%$ for two years, $25 \pm 10^\circ\text{C}$	
N1913A/B or N1914A/B	$\pm 0.4\%$ for two years, $25 \pm 10^\circ\text{C}$	
E4416A/E4417A	$\pm 0.6\%$ for two years, $25 \pm 10^\circ\text{C}$	
E4418B/E4419B	$\pm 0.6\%$ for two years, $25 \pm 10^\circ\text{C}$	
Frequency		50 MHz (nominal)
SWR		
N1911A/N1912A		< 1.05:1 (typical)
N1913A/B or N1914A/B		< 1.05:1 (typical)
E4416A/E4417A		< 1.06:1 (nominal)
E4418B/E4419B		< 1.05:1 (nominal)
Front Panel Connector		Type N (f), 50 Ω

Tuned RF Level Specification Nomenclature

The tuned RF level measurement uncertainty is represented primarily by two regions. For high signal-to-noise (S/N) measurements, the uncertainty is dominated by the linearity of the measuring receiver. For low S/N measurements, the measurement uncertainty is dominated by the noise of the measuring receiver being added to the measured signal. The input power level at which the uncertainty switches from linearity dominated to noise dominated is labeled as “Residual Noise Threshold.” The minimum power level is defined as the noise floor of the measuring receiver system.

Additionally, there are 2 range-to-range change uncertainties known as “Range 2 Uncertainty” and “Range 3 Uncertainty”, respectively. Range 2 Uncertainty occurs when the measuring receiver switches from Range 1 to Range 2, and Range 3 Uncertainty from Range 2 to Range 3. They are additive uncertainties applied to all measurements whose input powers across “Range Switch Level”.

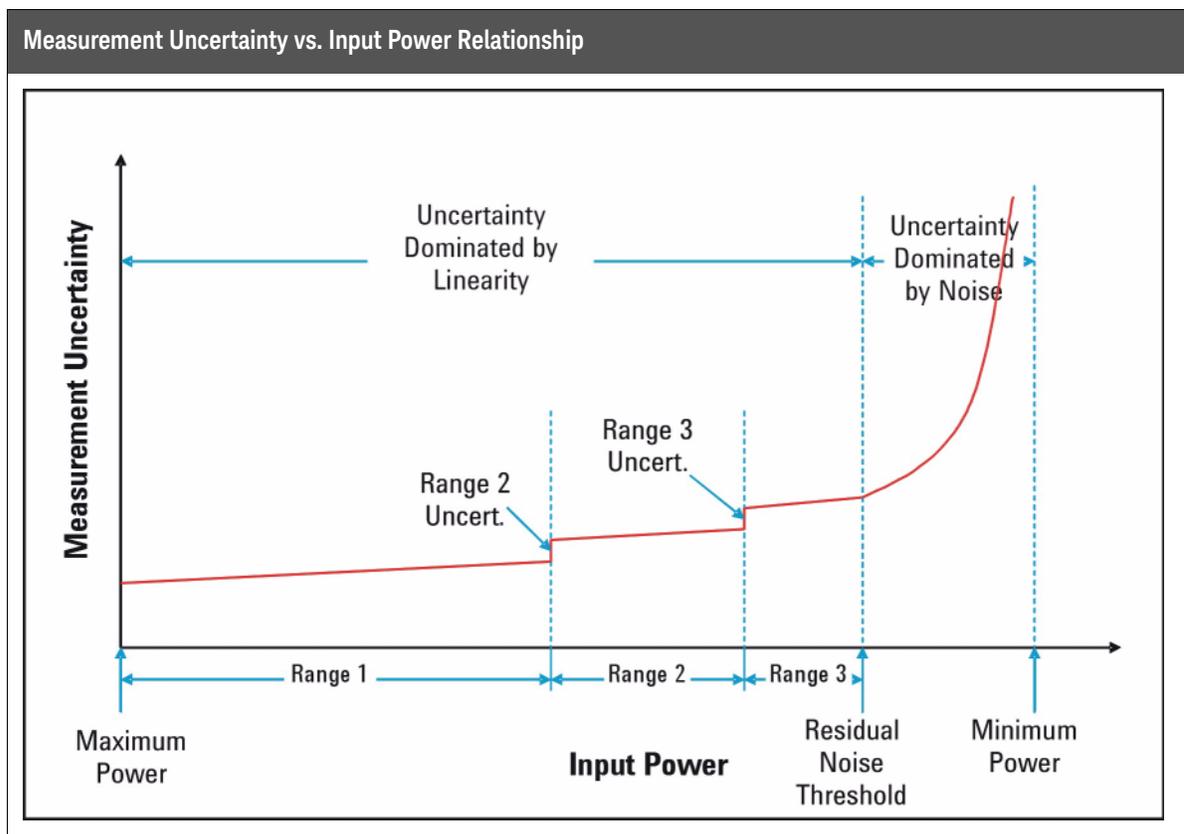

Tuned RF Level (TRFL)

Additional Definitions and Requirements

PXA Option MPB (Microwave pre-selector bypass) is required to perform “Tuned RF Level” measurements above 3.6 GHz

PXA Option P03, P08, P13, P26, P44, or P50 (Preamplifier, depending on the maximum frequency of the PXA) is required to achieve the Minimum Power specified in this section.

These specifications are valid when the measuring receiver input is a CW tone and operating temperature is within the range of 20 to 30 °C. Measurement accuracy mode needs to be set to “High”. The measurements need to be complete within a time period of 20 minutes after setting the Reference Level.

Absolute and relative accuracy specifications do not include mismatch uncertainty.

Specifications in the following tables apply when measuring stable frequency sources, and where the source and measuring receiver share a common frequency reference.

NOTE

For sources with frequency instability greater than 100 kHz, use the Tuned RF Level with Tracking measurement. When using the Tuned RF Level with Tracking measurement, the following additional amplitude error must be applied due to FFT frequency response as the signal drifts within the Tracking Range:

$\pm(0.15 \text{ dB} + 0.1 \text{ dB/MHz of span})$ to a max of $\pm 0.40 \text{ dB}$, where span is equivalent to the Tracking Range setting in the measurement.

The Tuned RF Level with Tracking measurement upper frequency limit = 3.6 GHz.

Minimum power = $10 \times \log[\text{Integrated BW}/(75 \text{ Hz} \times 1.06)]$, relative to the specified 75 Hz minimum power level.

Measuring Receiver
Tuned RF Level (TRFL)

Description	Specification		Supplemental Information
Power Range			
Maximum power			
Preamp off	+30 dBm		
Preamp on			
<i>Option N9030B-503</i>	+30 dBm		
<i>Option N9030B-508/513/526</i>	+24 dBm		
<i>Option N9030B-544/550</i>	+20 dBm		
Minimum power (dBm)^a	75 Hz IFBW ^b	10 Hz IFBW ^c	
Frequency Range			
<i>Option 503/508/513/526^d</i>			
100 to 200 kHz	-123.0	-137.8	Band 0
200 to 500 kHz	-126.0	-140.8	Band 0
500 kHz to 1 MHz	-130.0	-144.8	Band 0
1 to 10 MHz	-132.0	-146.8	Band 0
10 MHz to 2.1 GHz	-136.0	-150.8	Band 0
2.1 to 3.6 GHz	-134.0	-148.8	Band 0
3.5 to 8.4 GHz	-130.2	-145.0	Band 1
8.3 to 13.6 GHz	-129.2	-144.0	Band 2
13.5 to 16.9 GHz	-123.2	-138.0	Band 3
16.9 to 20 GHz	-121.2	-136.0	Band 4
20 to 26.5 GHz	-106.7	-121.5	Band 4

- Pre-amplifier option (N9030B-Pxx) is automatically turned "On" to achieve the Minimum Power. In addition to 75 Hz and 10 Hz IFBW listed here, the N5531X also offers 30 kHz and 200 kHz IFBW settings for less stable signal generator calibration. With 30 kHz and 200 kHz IF bandwidths (IFBW), TRFL minimum power level will be degraded by a factor of $10 \times \log(\text{IFBW}/75 \text{ Hz})$, relative to the specified 75 Hz minimum power level. This will result in a degradation of 26 dB for the 30 kHz IF bandwidth and 34 dB for the 200 kHz IF bandwidth.
- With 75 Hz IFBW setting selected, the measurement automatically switches the IFBW to the 30 Hz setting for SNR values <10 dB.
- With 10 Hz IFBW setting selected, the measurement automatically switches the IFBW to the 1 Hz setting for SNR values <10 dB.
- The frequency option determines the maximum frequency the PXA can reach.

Measuring Receiver
Tuned RF Level (TRFL)

Description	Specification		Supplemental Information
Minimum Power (dBm)^a Frequency Range	75 Hz IFBW ^b	10 Hz IFBW ^c	
<i>Option 544/550^d</i>			
100 to 200 kHz	-123.0	-137.8	Band 0
200 to 500 kHz	-126.0	-140.8	Band 0
500 kHz to 1 MHz	-128.0	-142.8	Band 0
1 to 10 MHz	-132.0	-146.8	Band 0
10 MHz to 2.1 GHz	-135.0	-149.8	Band 0
2.1 to 3.6 GHz	-134.0	-148.8	Band 0
3.5 to 8.4 GHz	-126.2	-141.0	Band1
8.3 to 13.6 GHz	-126.2	-141.0	Band 2
13.5 to 17.1 GHz	-125.2	-140.0	Band 3
17 to 20 GHz	-124.2	-139.0	Band 4
20 to 26.5 GHz	-117.7	-132.5	Band 4
26.4 to 30 GHz	-113.7	-128.5	Band 5
30 to 34 GHz	-111.7	-126.5	Band 5
33.9 to 37 GHz	-109.7	-124.5	Band 6
37 to 40 GHz	-99.7	-114.5	Band 6
40 to 44 GHz	-97.7	-112.5	Band 6
44 to 46 GHz	-96.7	-111.5	Band 6
46 to 50 GHz	-95.7	-110.5	Band 6

- Pre-amplifier option (N9030B-Pxx) is automatically turned "On" to achieve the Minimum power. In addition to 75 Hz and 10 Hz IFBW listed here, the N5531X also offers 30 kHz and 200 kHz IFBW settings for less stable signal generator calibration. With 30 kHz and 200 kHz IF bandwidths (IFBW), TRFL minimum power level will be degraded by a factor of $10 \times \log(\text{IFBW}/75 \text{ Hz})$, relative to the specified 75 Hz minimum power level. This will result in a degradation of 26 dB for the 30 kHz IF bandwidth and 34 dB for the 200 kHz IF bandwidth.
- With 75 Hz IFBW setting selected, the measurement automatically switches the IFBW to the 30 Hz setting for SNR values <10 dB.
- With 10 Hz IFBW setting selected, the measurement automatically switches the IFBW to the 1 Hz setting for SNR values <10 dB.
- The frequency option determines the maximum frequency the PXA can reach.

Measuring Receiver
Tuned RF Level (TRFL)

Description	Specification	Supplemental Information
Linearity	$\pm(0.009 \text{ dB} + 0.005 \text{ dB}/10 \text{ dB step}^a)$	Refer to Relative Fidelity in the PXA base specifications for special circumstances.
Relative Measurement Accuracy		
Residual noise threshold ^b to Max power	$\pm(0.015 \text{ dB} + 0.005 \text{ dB}/10 \text{ dB step}^a)^c \text{ }^d \text{ (nom.)}$	
Minimum power to residual noise threshold	$\pm(\text{cumulative error}^e + 0.0012 \times (\text{Input Power} - \text{Residual Noise Threshold Power})^2)$	
Residual Noise Threshold Power (dBm)	Residual Noise Threshold Power = Minimum Power +30 dB	
Range 2 Uncertainty^f	$\pm 0.031 \text{ dB}$	
Range 3 Uncertainty^g	$\pm 0.031 \text{ dB}$	

- a. "Step" in this specification refers to the difference between relative measurements, such as might be experienced by stepping a stepped attenuator. Therefore, this accuracy is computed by adding the uncertainty for each full or partial 10 dB step to the other uncertainty term. For example, if the two levels whose relative level is to be determined differ by 15 dB, consider that to be a difference of two 10 dB steps. The accuracy specification would be $\pm(0.009 + 2 \times (0.005))$ or $\pm 0.019 \text{ dB}$.
- b. The residual noise threshold power is the power level at which the signal-to-noise ratio (SNR) becomes the dominant contributor to the measurement uncertainty. See the "Tuned RF Level Specification Nomenclature" section.
- c. Immediately following the system alignments, the measurement is made by manually setting frequency to that of the signal-under-test, "Accuracy" mode to "High", and "Measure Control" to "Single".
- d. This includes the linearity accuracy.
- e. In relative accuracy of TRFL measurements, the "cumulative error" is the error incurred when stepping from a higher power level to the Residual Noise Threshold Power level. The formula to calculate the cumulative error is $\pm(0.015 \text{ dB} + 0.005 \text{ dB}/10 \text{ dB step})$. For example, assume the higher level starting power is 0 dBm and the calculated Residual Noise Threshold Power is -99 dBm. The cumulative error would be $\pm(0.015 + [99/10] \times 0.005 \text{ dB})$, or $\pm 0.065 \text{ dB}$, where [x] is a ceiling function that means the smallest integer not less than x.
- f. Add this specification when the Measuring Receiver enters the "Range 2" state. Range 2 is entered when the "Range 1" signal-to-noise ratio (SNR) falls between 50 and 28 dB. The SNR value is tuning band dependent. A prompt of "Range 2" in the PXA display will indicate that the Measuring Receiver is in Range 2.
- g. Add this specification in addition to "Range 2 Uncertainty" when the Measuring Receiver software enters the "Range 3" state. Range 3 is entered when the "Range 2" SNR falls between 50 and 28 dB. The SNR value is tuning band dependent. A prompt of "Range 3" in the PXA display will indicate that the Measuring Receiver is in Range 3.

Measuring Receiver
Tuned RF Level (TRFL)

Description	Specification	Supplemental Information
Absolute Measurement Accuracy		
+20 dBm to Max Power	$\pm(\text{Power Meter Range 1 Uncert} + 0.005 \text{ dB}/10 \text{ dB Step})$	
Residual Noise Threshold power to +20 dBm	$\pm(\text{Power Meter Range 2-4 Uncert} + 0.005 \text{ dB}/10 \text{ dB Step})$	
Minimum Power to Residual Noise Threshold power	$\pm(\text{cumulative error}^a + 0.0012 \times (\text{Input Power} - \text{Residual Noise Threshold Power})^2)$	
Residual Noise Threshold Power (dBm)	Residual Noise Threshold Power = Minimum Power + 30 dB	
Range 2 Uncertainty^b	$\pm 0.031 \text{ dB}$	
Range 3 Uncertainty^c	$\pm 0.031 \text{ dB}$	

a. In absolute accuracy of TRFL measurements, the “cumulative error” is the error incurred when stepping from a higher power level to the Residual Noise Threshold power level. See [page 421](#) for a graphic. In order to calculate the cumulative error, you must determine the Residual Noise Threshold power and determine the Power Meter Range Uncertainty. The formula to calculate the cumulative error is: $\pm(\text{power meter range uncertainty} + 0.005 \text{ dB}/10 \text{ dB step})$.

For example: the power sensor is option 504, starting power is 0 dBm and power will be stepped to -120 dBm. Therefore, the Power Meter Range Uncertainty is $\pm 0.222 \text{ dB}$ from the table on [page 427](#). Assume a 26.5 GHz PXA (Option N9030B-526) is used, the IFBW is set to 75 Hz to gain measurement speed, and the measurement frequency is 2 GHz. The Residual Noise Threshold Power is calculated by adding 30 dB to the Minimum Power specification shown on [page 423](#). That is, Residual Noise Threshold Power = $-136 \text{ dBm} + 30 \text{ dB} = -106 \text{ dBm}$ using the formula on this page. The cumulative error is then $\pm(0.222 \text{ dB} + [106/10] \times 0.005 \text{ dB})$, or $\pm 0.277 \text{ dB}$, where $[x]$ is a ceiling function that means the smallest integer not less than x . That is 11 in this example. It should be noted that even though the power level was stepped 120 dB (twelve 10 dB steps), the Residual Noise Threshold occurred at -106 dBm (eleven 10 dB steps).

b. Add this specification when the Measuring Receiver enters the “Range 2” state. Range 2 is entered when the “Range 1” signal-to-noise ratio (SNR) falls between 50 and 28 dB. The SNR value is tuning band dependent. A prompt of “Range 2” in the PXA display will indicate that the Measuring Receiver is in Range 2.

c. Add this specification in addition to “Range 2 Uncertainty” when the Measuring Receiver software enters the “Range 3” state. Range 3 is entered when the “Range 2” SNR falls between 50 and 28 dB. The SNR value is tuning band dependent. A prompt of “Range 3” in the PXA display will indicate that the Measuring Receiver is in Range 3. In the example mentioned in footnote a., since the measurements step through both Range 2 and Range 3, the range uncertainties need to be taken into account. Therefore, the total absolute power measurement uncertainty in this example can be calculated as $\pm(0.222 \text{ dB} + [106/10] \times 0.005 \text{ dB} + 0.031 \text{ dB} + 0.031 \text{ dB} + 0.0012 \times (120 - 106)^2 \text{ dB}) = \pm 0.574 \text{ dB}$.

Measuring Receiver
Tuned RF Level (TRFL)

Description	Specification				Supplemental Information			
RF Power Accuracy (dB)					Typicals			
Power Meter Range 1	Sensor module options				Sensor module options			
+20 to +30 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz $\leq f_c \leq$ 10 MHz	± 0.287	–	–	–	± 0.146	–	–	–
10 MHz $< f_c \leq$ 30 MHz	± 0.287	± 0.287	$\pm 0.287^a$	–	± 0.146	± 0.146	$\pm 0.146^a$	–
30 MHz $< f_c \leq$ 2 GHz	± 0.287	± 0.287	± 0.287	± 0.265	± 0.146	± 0.146	± 0.146	± 0.135
2 GHz $< f_c \leq$ 4.2 GHz	± 0.302	± 0.302	± 0.302	± 0.279	± 0.146	± 0.154	± 0.146	± 0.142
4.2 GHz $< f_c \leq$ 18 GHz	–	± 0.466	± 0.468	± 0.342	–	± 0.240	± 0.241	± 0.175
18 GHz $< f_c \leq$ 26.5 GHz	–	–	± 0.386	± 0.332	–	–	± 0.198	± 0.170
26.5 GHz $< f_c \leq$ 50 GHz	–	–	–	± 0.363	–	–	–	± 0.186
					Typicals			
Power Meter Range 2	Sensor module options				Sensor module options			
0 to $< +20$ dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz $\leq f_c \leq$ 10 MHz	± 0.222	–	–	–	± 0.113	–	–	–
10 MHz $< f_c \leq$ 30 MHz	± 0.222	± 0.222	$\pm 0.222^a$	–	± 0.113	± 0.113	$\pm 0.113^a$	–
30 MHz $< f_c \leq$ 2 GHz	± 0.222	± 0.222	± 0.222	± 0.191	± 0.113	± 0.113	± 0.113	± 0.097
2 GHz $< f_c \leq$ 4.2 GHz	± 0.222	± 0.242	± 0.242	± 0.211	± 0.113	± 0.123	± 0.123	± 0.107
4.2 GHz $< f_c \leq$ 18 GHz	–	± 0.432	± 0.433	± 0.291	–	± 0.222	± 0.223	± 0.148
18 GHz $< f_c \leq$ 26.5 GHz	–	–	± 0.342	± 0.279	–	–	± 0.175	± 0.142
26.5 GHz $< f_c \leq$ 50 GHz	–	–	–	± 0.316	–	–	–	± 0.161
					Typicals			
Power Meter Range 3	Sensor module options				Sensor module options			
-5 to < 0 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz $\leq f_c \leq$ 10 MHz	± 0.220	–	–	–	± 0.112	–	–	–
10 MHz $< f_c \leq$ 30 MHz	± 0.220	± 0.219	$\pm 0.220^a$	–	± 0.112	± 0.111	$\pm 0.112^a$	–
30 MHz $< f_c \leq$ 2 GHz	± 0.220	± 0.219	± 0.220	± 0.189	± 0.112	± 0.111	± 0.112	± 0.097
2 GHz $< f_c \leq$ 4.2 GHz	± 0.240	± 0.219	± 0.240	± 0.209	± 0.122	± 0.122	± 0.122	± 0.106
4.2 GHz $< f_c \leq$ 18 GHz	–	± 0.240	± 0.432	± 0.289	–	± 0.122	± 0.222	± 0.148
18 GHz $< f_c \leq$ 26.5 GHz	–	–	± 0.341	± 0.277	–	–	± 0.174	± 0.141

Measuring Receiver
Tuned RF Level (TRFL)

Description	Specification				Supplemental Information			
26.5 GHz < f_c ≤ 50 GHz	–	–	–	±0.315	–	–	–	±0.161
Power Meter Range 4	Sensor module options				Sensor module options			
–10 to < –5 dBm	#504	#518	#526	#550	#504	#518	#526	#550
100 kHz ≤ f_c ≤ 10 MHz	±0.229	–	–	–	±0.117	–	–	–
10 MHz < f_c ≤ 30 MHz	±0.229	±0.229	±0.229 ^a	–	±0.117	±0.117	±0.117 ^a	–
30 MHz < f_c ≤ 2 GHz	±0.229	±0.229	±0.229	±0.200	±0.117	±0.117	±0.117	±0.102
2 GHz < f_c ≤ 4.2 GHz	±0.249	±0.249	±0.249	±0.219	±0.127	±0.127	±0.127	±0.111
4.2 GHz < f_c ≤ 18 GHz	–	±0.435	±0.437	±0.296	–	±0.224	±0.225	±0.151
18 GHz < f_c ≤ 26.5 GHz	–	–	±0.347	±0.285	–	–	±0.178	±0.145
26.5 GHz < f_c ≤ 50 GHz	–	–	–	±0.321	–	–	–	±0.164
RF Power Resolution								
Display resolution	0.001 dB							

a. For U5532C only.

Information about Residuals

- As the DANL (displayed average noise level) of a signal/spectrum analyzer becomes very low, it can reveal “residuals”. These occur at discrete frequencies and arise from the various clocks and other components of the local oscillators. This is true for ALL modern signal/spectrum analyzers. The residuals specification for the PXA Series is –100 dBm. Please take this information into consideration when you measure the TRFL level below –100 dBm. A user may apply a 50 ohm terminator to the PXA “RF input” connector and switch to the “spectrum analyzer” mode to verify the PXA residuals.
- The power meter and early vintage of the sensor module (N5532) combination may generate a residual of around –100 dBm or lower at frequency of 50 MHz and its harmonics. Please take this information into consideration when you use the N5532 to measure the TRFL level below –100 dBm at 50 MHz and its second or third harmonic.

Description	Specification	Supplemental Information
Operating Frequency Range		
<i>Option 503/508/513/526/544/550</i>	100 kHz to 3.6 GHz	
<i>Option 508/513/526/544/550</i>	3.6 to 8.4 GHz	Requires <i>Option MPB</i>
<i>Option 513/526/544/550</i>	8.4 to 13.6 GHz	Requires <i>Option MPB</i>
<i>Option 526/544/550</i>	13.6 to 26.5 GHz	Requires <i>Option MPB</i>
<i>Option 544/550</i>	26.5 to 44 GHz	Requires <i>Option MPB</i>
<i>Option 550</i>	44 to 50 GHz	Requires <i>Option MPB</i>
Displayed Units		
Absolute	dBm, Watts, Volts, dBmV, or dBuV	
Relative	Percent or dB	
Displayed Resolution	6 digits in watts or 5 digits in volts mode 0.001 dB in dBm or dB (relative) mode	
Input SWR	See “RF Power” on page 415.	

Measuring Receiver
Graphical TRFL Measurement Accuracy (Nominal)


Graphical TRFL Measurement Accuracy (Nominal)

N9030B, Option 503/508/513/526, IF BW 10 Hz – Preamp On: Option P03/P08/P13/P26 [Plot]



Measuring Receiver
Graphical TRFL Measurement Accuracy (Nominal)

N9030B, Option 544/550, IF BW 10 Hz – Preamp On: Option P44/P50 [Plot]

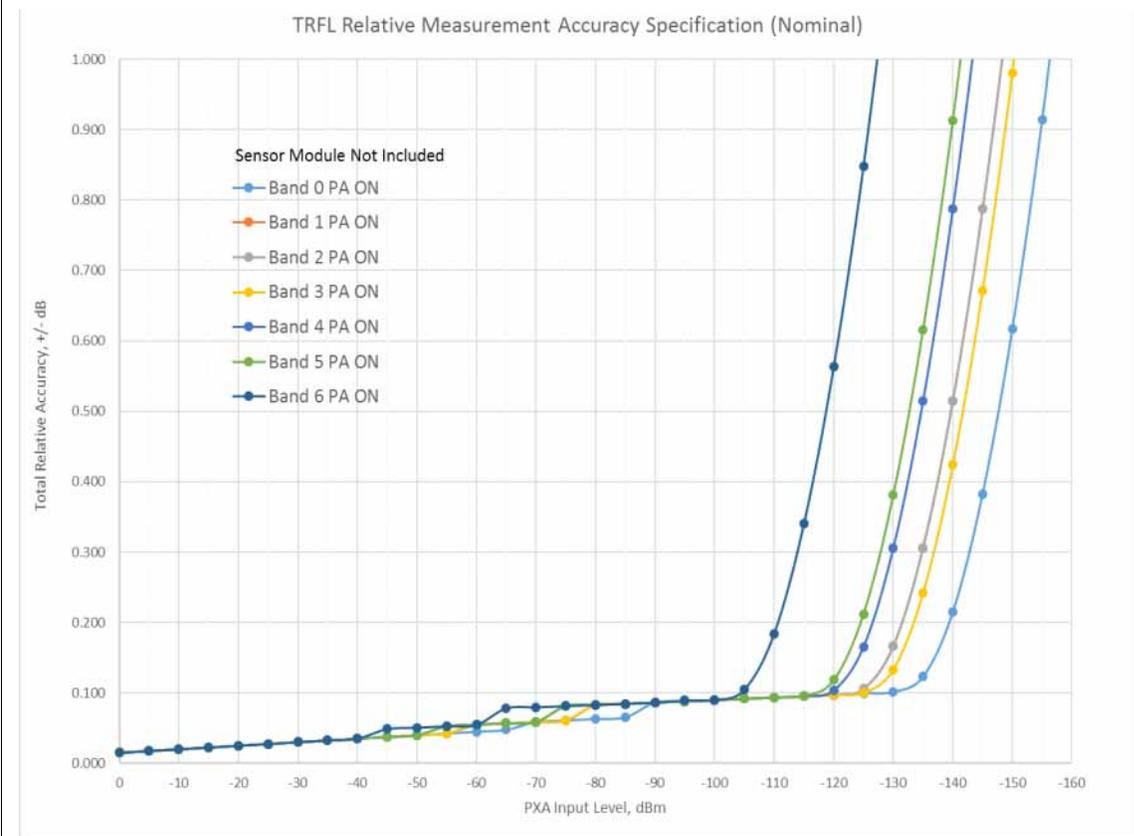



This information is subject to change without notice.

© Keysight Technologies 2019-2024

Edition 1, April 2024

N5531-90006

www.keysight.com