

Keysight Technologies

Choosing the Right DC System Power Supply

Selection Guide

Keysight Basic and High Performance DC Power Supplies

- Reliable
- Programmable
- Affordable
- Practical


Reliable Power

We may live in an unpredictable world, but not when it comes to DC power for test. The Keysight Technologies, Inc. DC system power supplies are consistent, reliable performers, ready to handle the most demanding applications. Our high performance system solutions meet the most exacting needs for production test applications, while our basic DC power supplies provide essential features for a tight budget. In each case, you get stable, clean DC power at a great price, with the features you need and the day-to-day reliability you expect from Keysight.

- Excellent performance — low noise, excellent line and load regulation, fast transient response
- Programmable — GPIB or RS-232 interfaces, SCPI and VXIplug&play drivers
- Flexible — single and dual range, single/dual/triple outputs, 30W to 200W
- Affordable — industry-leading price/performance

Power to Choose

What type of power do you need? Keysight gives you choices. Our 6600 Series high performance sources provide precise control over a range of output power levels with highly accurate measurements, so you can meet the most exacting needs for automated test applications. Keysight "E" series power supplies are available with a wide range of output levels, all providing essential capabilities at an economical price, with low ripple and noise, excellent regulation, and Keysight's trade-mark reliability. Whether you need a low-power source to provide bias power to circuits, to characterize components, or to make fast measurements, Keysight gives you power to choose.

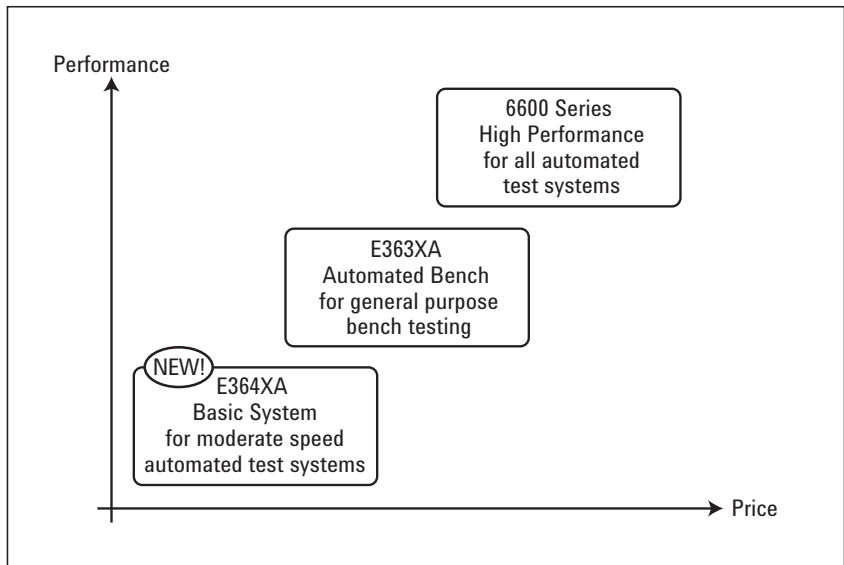

Series	Models	Power Range	Voltage
E364XA	10	30W - 100W	8 V - 60 V
E363XA	4	80W - 200W	6 V - 50 V
661XC	4	40W, 50W	8 V - 100 V
663XB	4	80W, 100W	8 V - 100 V
664XA	5	200W	8 V - 12

E363X: Power to the Bench

Keysight E3631A - E3634A power supplies are designed for bench automation in R&D design and QA verification. Even at value prices, these power supplies deliver great features and power. Their low noise and excellent regulation are essential for R&D engineers who need to evaluate assemblies or applications, and for test engineers who need to develop repair strategies for production.

Hybrid regulation techniques create a denser, lighter package and a smaller footprint—key considerations when bench space is at a premium. Front panel output connections enable ease-of-use, while GPIB and RS-232 interfaces make for a versatile power source.

Key Features

- Power up to 200 watts and voltage ranges up to 50 volts
- Low noise and excellent regulation
- Overvoltage and overcurrent protection (except E3631A)
- Built-in GPIB and RS-232 interfaces
- Dual-range outputs in the E3632A, E3633A, and E3634A for great coverage of voltage and current for various applications
- Triple output on the E3631A allows for flexibility in mixed-signal applications (such as providing analog and digital bias power) and for tracking feature $\pm 25V$ outputs
- Front and rear output on E3633A and E3634A
- 3-year warranty

Typical Applications

- General Purpose Bench Testing either in R&D or in Production
- QA Verification



Figure 1: E364X: Basic System Power

E364X: Basic System Power

The Keysight E3640A - E3649A power supplies fill the gap between manual bench power supplies and high performance system supplies, offering unmatched performance and functionality at a great price. They're designed for moderate speed test where automation is important and throughput is not critical. These single- and dual-output, dual-range power supplies are ideal for contract manufacturers and OEMs who need to perform basic electronic functional tests on a variety of products quickly and economically.

All models support GPIB and RS-232 for quick connectivity. SCPI (Standard Commands for Programmable Instruments) keeps programming fast and simple. Less than 90 ms output settling time keeps throughput high without the need for a down programmer. Up to five store/recall states help minimize programming time while accelerating test. Remote sensing capability ensures output stability with longer leads.

Key Features

- Power up to 100 watts and 60 volts
- Low output noise and excellent regulation
- Overvoltage and overcurrent protection
- Front binding posts and rear output terminals for configuration flexibility
- Front-panel calibration—unit does not need to be removed from the rack
- Built-in GPIB and RS-232 interfaces
- Simple set-up for easy programming
- 3-year warranty

Typical Applications

- Flexible Low Volume Production Testing
- Sub-assembly Test
- Bias Power for Circuits



Figure 2. E3640A Dual Range Power Supply

6600: High Performance System Solutions

Do you need a power supply with excellent performance and built-in measurement capability? Keysight 6600 Series systems are ideal for production test applications where throughput is critical and rack space is at a premium. These one-box solutions reduce integration time and increase system reliability, and offer a variety of features to reduce test costs, increase test speed, and lower the cost of integration and ownership.

Compared to the “E” series, output transitions are over ten times faster, measurement times are up to five times faster, and program response and command processing times are accelerated. The built-in DMM allows for more accurate measurement capability. Throughput is significantly enhanced via the active down programmer that can quickly remove any energy from the unit under test when the output is programmed to zero. Extended remote sensing capability compensates for voltage drops in load leads of up to 50 percent of the rated output voltage, eliminating troublesome sourcing and measurement inaccuracies due to resistance in the load wiring.

Key Features

- Up to 200W and 120V
- Excellent regulation and low output noise
- Overvoltage and overcurrent protection
- Built-in GPIB and RS-232 (664XA - GPIB only)
- Discrete Fault Interrupt and Remote Inhibit (DFI/RI) for fast remote power disablement
- Analog programming capability simulates a true power source and serial link to control up to 16 supplies from one address (664XA only)
- 3-year warranty

Typical Applications

- Production Testing
- Electronic Sub-assembly Test
- Battery Test
- Battery Charging



Figure 3: 6600 Series High Performance System Power Supply

Quick Comparison of Keysight 30W to 200W Low Power DC Power Supplies

Features	E363XA	E364XA	661XC	663XB	664XA
No. of Models	4	10	4	4	5
Delivery	< 1 week, typically	< 1 week, typically	1 week	1 week	1 week
No. of Outputs	1 or 3	1 or 2	1	1	1
Applications	Semi-automated general purpose bench testing	Moderate speed semi-automated and automated production test	High performance automated production test	High performance automated production test	High performance automated production test
Size	Half rack, 3U	Half rack, 2U/3U	Half rack, 2U	Full rack, 2U	Full Rack, 2U
Connections	E3631/2A, Front only	Front & rear E3633/4A, Front & rear	Rear only	Rear only	Rear only
Programming	GPIB and RS-232	GPIB and RS-232	GPIB and RS-232	GPIB and RS-232	GPIB only
Programmable Wakeup State	No	No	Yes	Yes	Yes
Throughput Capabilities					
Output rise/fall	130 to 550 ms	<90 ms	6 ms	6 ms	35 ms
Transient Response	<50 μ s for output to recover within 15mV following a change in output current	<50 μ s for output to recover within 15mV following a change in output current	\leq 100 μ s(50 μ s in the fast mode) for output voltage to recover from zero to full load	\leq 100 μ s(50 μ s in the fast mode) for output voltage to recover from zero to full load within 20mV	\leq 100 μ s for output voltage to recover from zero to full load within 20mV within 20mV
DFI/RI	Relay control available from pin 1 of RS-232 connector	Relay control available from pin 1 of RS-232 connector	Allows shut down of multiple supplies or other h/w, provides for output relay control	Allows shut down of multiple supplies or other h/w, provides for output relay control	Allows shut down of multiple supplies or other h/w, provides for output relay control
Active Down programmer	No	No	Yes	Yes, negative current is programmable	Yes, sinks 20% of rated output current.
Performance					
Ripple and Noise (20 Hz to 20 MHz)	2 – 3mVpp/0.35 – 0.5mVrms	<5mVpp/0.5mVrms for 8V/20V models <8mVpp/1mVrms for 35V/60V models	3mVpp/0.3mVrms for 8V/20V models 3mVpp/0.5mVrms for 50V model 3mVpp/0.5mVrms for 100V model	3mVpp/0.3mVrms for 8V/20V models 3mVpp/0.5mVrms for 50V model 3mVpp/0.5mVrms for 100V model	3mVpp/300mVrms for 8V/20V models 4mVpp/400mVrms for 35V model 5mVpp/500mVrms for 60V model 7mVpp/700mVrms for 120V model
Line/Load Regulation	Voltage <0.01% + 2mV Current <0.01% + 250mA	Voltage <0.01% + 3mV Current <0.01% + 250mA	Voltage 0.5mV – 5 mV Current 0.25mA – 1mA	Voltage 0.5mV – 5 mV Current 0.25mA – 1mA	Voltage 0.5mV – 5 mV Current 0.25mA – 1mA
Remote Sensing	Can drop up to 0.7V in each load lead E3631A, None	Can drop up to 1V in each load lead	Can drop up to 2V in each load lead	Can drop up to 2V in each load lead	Can drop up to 2V in each load lead
Meters	4 or 5 digit voltage/ 4 digit current	4 digit	4 digit	4 digit	4 digit

To Learn More

For more information on choosing the best Keysight DC system power supply for your application, visit www.keysight.com/find/dcpowersupply or call Keysight DIRECT in the U.S.A. at **800-452-4844**.

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)