

Keysight Technologies

E4981A Capacitance Meter

Setting a new standard for ceramic capacitor production tests



Unlocking Measurement Insights

A New Standard for Ceramic Capacitor Production Tests

The Keysight Technologies, Inc. E4981A capacitance meter provides the best performance for

ceramic capacitor manufacturing test. Offering fast measurement speed and outstanding accuracy, the E4981A is the new standard in this industry.

High-resolution LCD display

Full 7 digit display for clear and easy viewing

Easy-to-use hardkeys and softkeys

Users can set the measurement parameters easily.

USB interface (USB memory device only)

Users can save measurement state data logs, and screen captures easily to USB memory devices.



Compact size

Small size to fit in an auto handler system

- 370 (W) x 105 (H) x 350 (D) mm (with front handle kit)
- 4.3 kg

Wide range capacitance measurement

From small to large capacitance can be measured

A Complete Solution that Replaces the 4268A and 4288A

Key Features

Fast measurement speed – 2 ms

(From trigger to EOM at 1 MHz)

Accurate and repeatable measurements

- Basic accuracy
Capacitance: $\pm 0.07\%$ (typical $\pm 0.042\%$)
Dissipation Factor: ± 0.0005 (typical ± 0.0003)
- Repeatable measurements, even small capacitance can be measured.

Wide measurement range from small to large capacitance

0 F to 2.0 mF


- (0 F to 1.5 nF/1 MHz)
- (68 pF to 200 nF/1 kHz)
- (6.8 nF to 2 mF/120 Hz)

Compatibility with the 4268A and 4288A

- SCPI commands
- Handler I/F
- Scanner I/F

Enhanced functions for production test

- Enhanced contact failure detections
- Synchronous source
- Frequency shift ($\pm 1\%$, $\pm 2\%$) at 1 MHz
- Faster data transfer

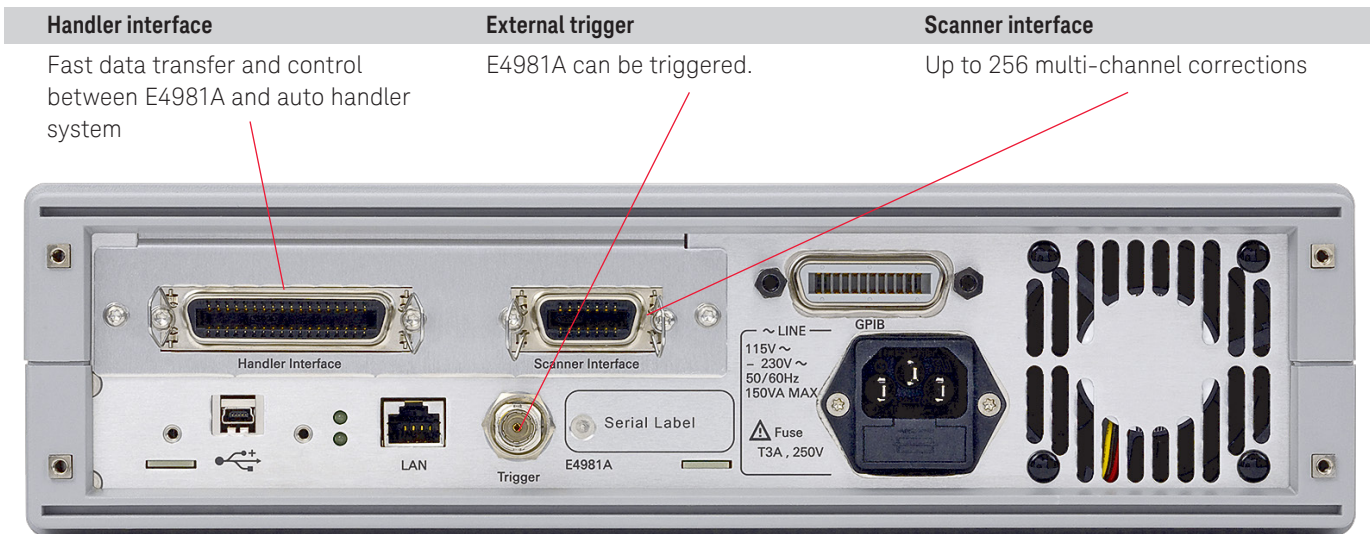

Standard USB/LAN/GPIB interface

Flexible PC connectivity and fast transfer speed

- 10/100 Base-T LAN
- USB (USBTMC) interface
- GPIB

Fast, Accurate, and Repeatable Measurement

Faster measurement speed

- More than two times faster measurement speed than the 4268A and 4288A
- No additional time for bin-sorting, scanner and synchronous source

Frequency	T1	T2 (1*)		T3 (Trigger wait time)	4268A	4288A
		On	Off		T2	T2
1 MHz	1.3 ms	2.3 ms	2.0 ms	0 ms	NA	6.5 ms
1 kHz	2.0 ms	3.0 ms	2.7 ms		22.5 ms	6.5 ms
120 Hz	10.0 ms	11.0 ms	10.7 ms		22.5 ms	NA

*1 tolerance is ±0.5ms

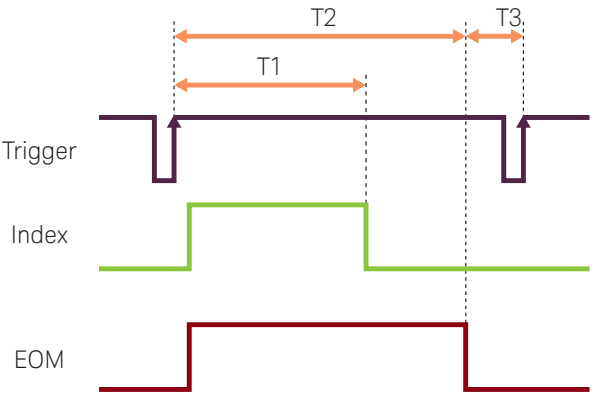


Figure 1. Measurement speed

Repeatable measurements

- Smaller fluctuation, especially in 1 pF range measurement.

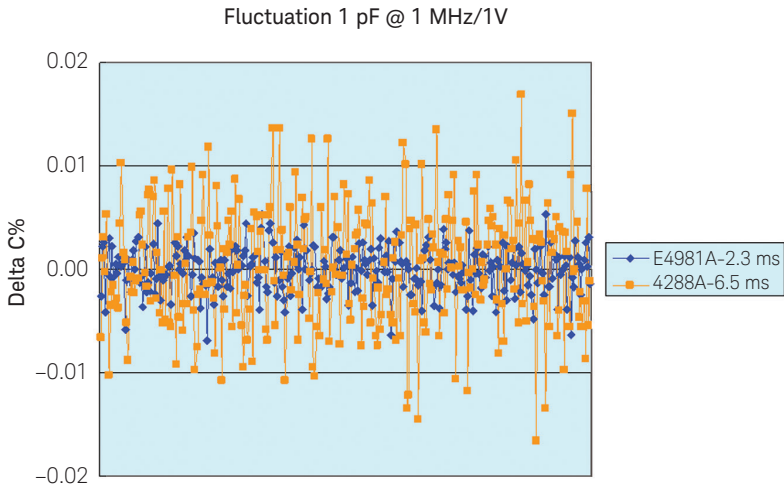


Figure 2. Measurement fluctuation comparison (Supplemental information)

Increased accuracy

Accurate capacitance measurement across all frequencies.

Range	Frequency	Measurement speed	
	1 MHz	2.3 ms	9.3 ms
1 pF		C: 0.055 + 0.070 x K D: 0.00035 + 0.00070 x K	C: 0.055 + 0.030 x K D: 0.00035 + 0.00030 x K
2.2 pF		C: 0.055 + 0.045 x K D: 0.00035 + 0.00045 x K	C: 0.055 + 0.020 x K D: 0.00035 + 0.00020 x K
4.7 pF - 1 nF		C: 0.055 + 0.030 x K D: 0.00035 + 0.00030 x K	C: 0.055 + 0.015 x K D: 0.00035 + 0.00015 x K
	1 KHz	3.0 ms	10 ms
100 pF		C: 0.055 + 0.070 x K D: 0.00035 + 0.00070 x K	C: 0.055 + 0.030 x K D: 0.00035 + 0.00030 x K
220 pF		C: 0.055 + 0.045 x K D: 0.00035 + 0.00045 x K	C: 0.055 + 0.020 x K D: 0.00035 + 0.00020 x K
470 pF - 10 uF		C: 0.055 + 0.030 x K D: 0.00035 + 0.00030 x K	C: 0.055 + 0.015 x K D: 0.00035 + 0.00015 x K
		C: 0.4 + 0.060 x K D: 0.004+0.00060 x K	C: 0.4 + 0.030 x K D: 0.004+0.00030 x K
	120 Hz	11.0 ms	69.1 ms
10 uF - 100 uF		C: 0.055 + 0.030 x K D: 0.00035 + 0.00030 x K	C: 0.055 + 0.015 x K D: 0.00035 + 0.00015 x K
220 uF - 1 mF		C: 0.4 + 0.060 x K D: 0.004+0.00060 x K	C: 0.4 + 0.030 x K D: 0.004 + 0.00030 x K

K = 1/Vs x Cr/Cx

Vs: Signal level

Cr: Measurement range

Cx: Measured value

Useful Functions for Production Test

Bin sorting

- Up to 9 bins for C-D/Q/R/G pass/fail

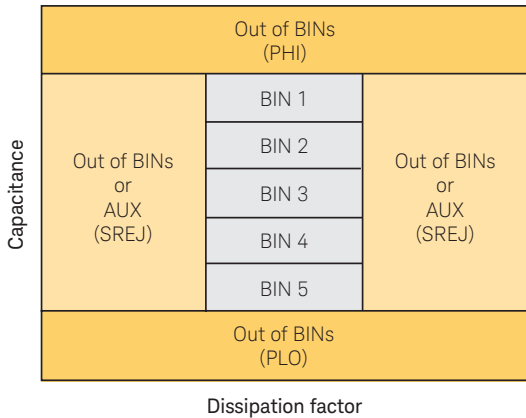


Figure 3. Bin sorting

Scanner interface

- Open/Short/Load channel-by-channel error correction up to 256 channels

Contact check function

The contact check function permits detection of possible contact failure. No additional time is required to perform it.

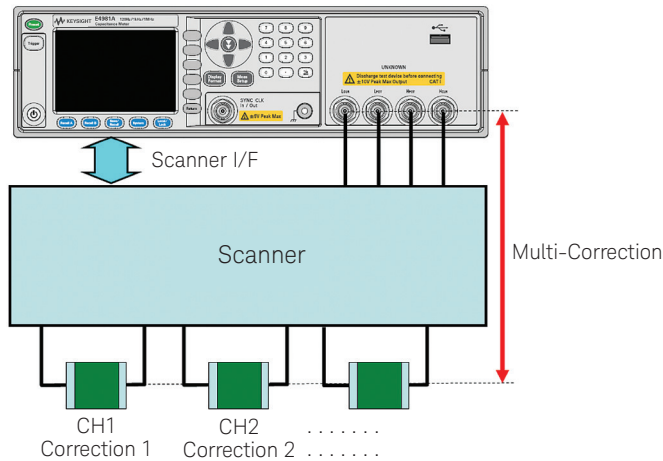


Figure 4. Scanner interface

Synchronous source

The test signal can be applied while a measurement is performed. This function reduces contact pin abrasion due to large test current, because the test signal is not applied at the moment the device is contacted and removed.

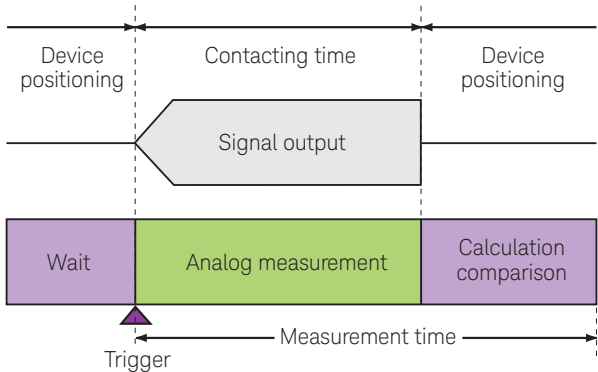


Figure 5. Synchronous source

Faster data transfer

- Faster GPIB/USB data transfer

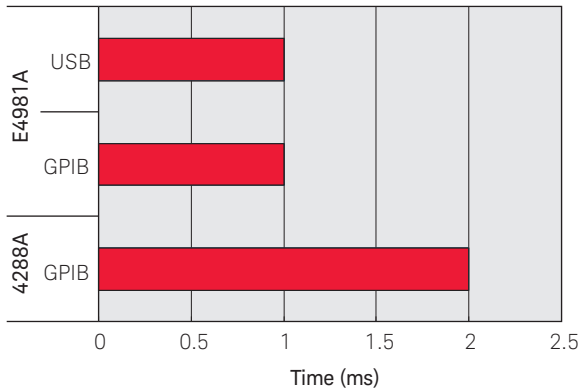


Figure 6. Data transfer speed comparison (4288A vs. E4981A)

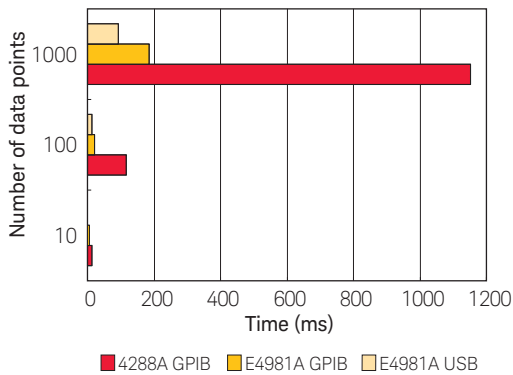


Figure 7. Buffered data transfer speed comparison (4288A vs. E4981A)

Test frequency shift at 1 MHz

- Frequency shift -2%, -1%, +1% and +2% is available. When two or more capacitance meters are needed to integrat into an auto handler system, such as the array-type capacitor test system, this function eliminates the interference between adjacent measurement terminals. The fluctuation in measurements can be reduced.

Modern Storage Device and PC Connectivity

Measurement setup/data save

- 10 measurement setups can be saved in internal memory and external USB memory
- Measurement result log can be saved in an external USB memory



Figure 9. USB memory

PC connection

- GPIB/LAN/USB Interfaces are standard
- Interactive remote operation using web browser through LAN is available.



Figure 10. Interactive remote operation using web browser

The E4981A Provides Even Greater Value

Not only does the E4981A provide increased performance, transitioning to the E4981A is seamless as the 4268A and 4288A functions and SCPI commands are compatible with the E4981A. For detailed migration information, refer to the migration guide available on our web site.

Key specification and function compatibility

Item	E4981A	4288A	4268A
Measurement parameter	Cs-D, Cs-Q, Cs-Rs Cp-D, Cp-Q, Cp-Rp, Cp-G	<—	<—
Frequency	120 Hz, 1 kHz, 1 MHz	1 kHz, 1 MHz	120 Hz, 1 kHz
Frequency shift @ 1 MHz	2%, 1%, -1%, -2%	2%, 1%, -1%	NA
Sync source	Yes	No	Yes
Signal level	0.1 V to 1 V	<—	<—
Measurement time (Trigger to EOM)	2.3/3.3/5.3/7.3/9.3 ms @ 1 MHz 3.0/4.0/6.0/8.0/10.0 @ 1 kHz 11.0/19.3/35.9/52.5/69.1 ms @ 120 Hz	6.5/16.5 ms @ 1 k/1 MHz	22.5/40.5/56.5 ms @ 120/1 kHz
Measurement accuracy			
120 Hz (@ 100 uF, 0.5 V)	C: 0.085%, D: 0.00065		C: 0.440%, D: 0.0018
1 kHz (@ 10 nF, 1 V)	C: 0.07%, D: 0.0005	C: 0.07%, D: 0.0005	C: 0.440%, D: 0.0018
1 MHz (@ 10 pF, 1 V)	C: 0.07%, D: 0.0005	C: 0.07%, D: 0.0005	
Compensation	OPEN/SHORT/LOAD	<—	<—
Multi-compensation	Yes	<—	<—
Contact check function	Yes	No	Yes
Cable length	0 m, 1 m, 2 m	<—	<—
Comparator	9 bin	<—	<—
Interface	GPIB, USB, LAN	GPIB	GPIB
Handler F	Yes	Yes	Yes
Scanner F	Yes (256ch)	Yes (64ch)	Option (64ch)
Resume function	No (auto recall is available)	Yes	Yes
Size	320 (W) x 90 (H) x 374 (D) mm (without handle/front rear bumper)	320 (W) x 90 (H) x 300 (D) mm	320 (W) x 90 (H) x 422 (D) mm

Ordering information

E4981A Capacitance Meter

Frequency Option

E4981A-001 120 Hz/1 kHz/1 MHz
E4981A-002 120 Hz/1 kHz

Additional Option

E4981A-ABA Add hardcopy user's guide (English)
E4981A-ABJ Add hardcopy user's guide (Japanese)
E4981A-1CM Rack mounts kit
E4981A-600 Delete front handle kit
E4981A-A6J ANSI Z540 compliant calibration
E4981A-1A7 ISO 17025 compliant calibration

Related Products

The E4980A and E4981A for ceramic capacitor measurement

E4980A Precision LCR Meter

The E4980A Precision LCR meter is equipped with various frequencies, higher signal level and DC bias, and higher capacitance measurement capability.



Items	E4980A	E4981A
Frequency	20 to 2 MHz	120/1 k/1 MHz
Measurement accuracy 1 kHz (@10 nF, 1V)	C: ± 0.08% D: ± 0.0006	C: ± 0.07% D: ± 0.0005
Signal level	0 to 2 Vrms (standard) 0 to 20 Vrms (Option 001)	0.1 to 1 V
DC bias	0 V/1.5 V/2 V (standard) 0 V to 40 V (Option 001)	None
Max measurement speed	100 Hz: 100 ms 1 kHz: 20 ms 1 MHz: 5.6 ms	120 Hz: 11 ms 1 kHz: 3 ms 1 MHz: 2.3 ms

Web Resources



Visit our E4981A web site for additional product information and literature.
www.keysight.com/find/E4981A

LCR meters
www.keysight.com/find/lcrmeters

Impedance analyzers
www.keysight.com/find/impedance

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



1939

THE FUTURE

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

www.keysight.com/find/service

Keysight Infoline

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/capacitance_meter

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-02-10-16)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System