

Keysight N777-C Family of Tunable Laser Sources

Overview

The Keysight Technologies N777-C Family of Tunable Laser Sources offers the full wavelength range from 1240 nm to 1650 nm with no wavelength gaps.

The N777-C tunable laser sources realize the cost efficiency and performance required to test components for coarse and dense wavelength division multiplexing (CWDM, DWDM, LR4) and passive optical networks (PON). Whether you need to verify the design of demanding optical components or adjust more wavelength-selective switches per hour, or you simply need a stable, tunable optical source, the N777-C family of tunable lasers offers a suitable model.

All N777-C models are based on a common cavity and laser module design and share a narrow linewidth, excellent long-term stability and low spontaneous emission level. They are software-compatible with the 8160xA and 81600B lasers, the industry standards for more than a decade, but occupy 1 height-unit less rack space.

The remote user interface on the instrument is accessible with just a web browser, either via LAN or via USB connection. An optional touch-screen display provides local operator access and displays current operating parameters. Compared to the top line model N7776C, the N7778C value line models and the N7779C basic line models offer additional price-performance options based on output power, tuning speed, wavelength accuracy and repeatability.



Web user interface but no LAN?

Connect instrument and PC via USB. The instrument shows up as a new drive: double-click the shortcut on that drive. This lets the default browser open an RNDIS connection to the instrument: the graphical user interface appears. It's as simple as that!

Table of Contents

Introduction.....	3
Keysight N7776C Top-Line Tunable Laser Source	4
Keysight N7778C Value Line Tunable Laser Sources.....	4
Keysight N7779C Basic Line Step-Tunable Laser Source	4
Features and Options of the N777-C Family	5
Specifications	9
N777-C Family of Tunable Lasers, Wavelength Options.....	10
Wavelength Tuning and Spectral Performance	11
N7776C Tunable Laser Source, Top Line, High Power with Low SSE	12
N7778C Tunable Laser Source, Value Line, High Power with Low	13
N7779C Step-Tunable Laser Source, Basic Line, High Power with Low SSE	14
Specification Conditions	14
Supplementary Performance Characteristics	15
General Specifications	16
Ordering Information	17

Introduction

Specified performance in the fast, two-way continuous sweep mode

As manufacturing yield expectations become more and more stringent, it is important that all instruments deliver optimum performance under all measurement conditions.

The N7776C top line models and the N7778C value line models can perform two-way sweeps with up to 200 nm/s to accelerate wavelength-dependent alignment processes and the automated calibration of wavelength-selective devices. Shorter time to testing and faster swept-wavelength tests help reduce test cost per device, improve test margins and lower the cost of ownership. The dynamic specifications for swept operation apply in both directions, independent from the sweep speed. The N7779C basic line model tunes in wavelength steps of 0.1 pm resolution.

Optional display unit

All N777-C tunable lasers are optionally available with a display unit. The 5-inch capacitive touchscreen allows to manually set wavelength and power, or to activate coherence control. The touchscreen provides access to the same functionality as the web user interface.



Figure 1. N777-C tunable laser with display unit

Keysight N7776C Top-Line Tunable Laser Source

The new Keysight N7776C top line tunable laser source is designed to reach optimal accuracy and sub-picometer repeatability in static and swept operation for outstanding test efficiency.

With the product family's lowest spontaneous emission level, the N7776C enables the validation of extremely deep filters. It also offers the best wavelength accuracy in the family – enabled by its high-resolution wavelength reference unit that provides real-time tracking and control and includes a gas cell for excellent long-term stability and self-adjustment capability.

Improved: Keysight N7778C Value Line Tunable Laser Sources

The new N7778C value line tunable laser source offers a peak output power of more than +12 dBm, at least 75 dB/nm above its spontaneous emission level. The improved version, indicated by mandatory option code N7778C-004, features a typical wavelength repeatability of ± 1 pm at two-way sweeps up to 200 nm/s, and a typical absolute wavelength accuracy of ± 4 pm. The N7778C's balance of features, performance and price makes it suitable for cost-effective, high-throughput manufacturing-floor component testing as well as for coherent transmission experiments.

Keysight N7779C Basic Line Step-Tunable Laser Source

The new N7779C basic line tunable laser source, like the other new N777-C models, can step quickly to discrete wavelengths with a resolution of 0.1 pm and a typical wavelength repeatability of ± 3 pm, making it ideal for cost-effective testing of broadband optical devices. With wavelength setting times like 300 ms, rapid stepped sweeps are possible. Like the other lasers in the N777-C family, it delivers more than +12 dBm peak output power with low spontaneous emission levels. At ± 0.01 dB power stability over an hour, it can also serve as a static local oscillator with a wide tuning range for receiver testing or transmission experiments.

Features and Options of the N777-C Family

NEW: Extra-high power option for silicon photonics test

The new option 013, available for N7776C and N7778C, reaches over +19.4 dBm output power (+18 dBm for N7778C) and covers the wavelength range from 1250 nm to 1370 nm for an important set of applications. Equipped with PMF output fiber, the new option 013 is a particularly good match for testing and developing components with Silicon Photonics/ integrated photonics technology. Verifying the spectral responsivity and the sensitivity of receiver optical subassemblies (ROSA) for Ethernet benefit from more than +16 dBm output power across 1270 nm to 1360 nm (1290 nm to 1340 nm for N7778C) - enough to allow for external modulation in BER testing.

NEW: Enhanced wavelength tuning performance

Default fine tuning provides wavelength adjustment without overshoot. No separate fine-tuning control is needed for smooth tuning with 0.1 pm resolution, due to automatic coordination of the motor and piezoelectric actuator. This simplifies wavelength-optimization procedures.

DWDM, CWDM4, CWDM8 and LR4 component testing

Offering very low SSE levels, option 113 is ideal for testing wavelength filters for LR4 and CWDM4 components. It tunes from 1240 nm to 1380 nm and offers +13 dBm peak output power.

Option 114 covers the wavelength range from 1340 nm to 1495 nm. Combined with the other options, this allows measurements over all CWDM channels, such as for CWDM8 devices. Components for Raman amplification also use this wavelength range.

Options 116 and 216 cover the optical S, C and L-bands for the test of DWDM components with very low SSE levels, which is essential for crosstalk measurements high-channel-count multiplexers, demultiplexers or wavelength selective switch cores.

Integrated solutions for swept-wavelength spectral measurements covering 1240 nm to 1650 nm

The N777-C family is supported with the photonic application software suite for spectral measurements of insertion loss, polarization dependent loss and polarization mode dispersion in combination with Keysight power meters and polarization instruments. These provide optimal measurement performance and quick time-to-measurement by simplifying system integration. The photonic application software suite has a measurement engine for IL and PDL that can combine the sweeps of up to 3 tunable laser wavelength ranges. Such a setup can be used for testing wideband multiplexers and PON devices.

Find out more at: www.keysight.com/find/n7700

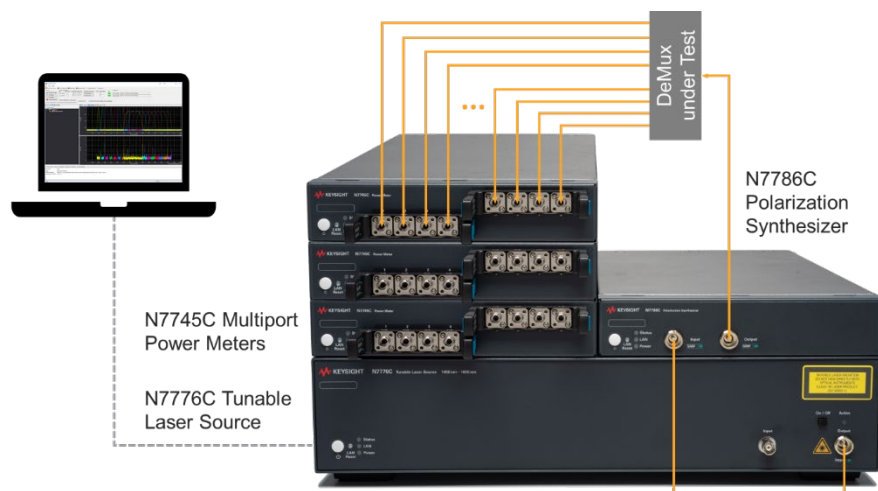


Figure 2. Test setup for swept-wavelength, IL/PDL measurements of a demultiplexer

Low SSE output for high dynamic range

A laser signal with low source spontaneous emission (SSE) is required for accurate crosstalk measurement of DWDM, CWDM and PON wavelength filtering components by producing light only at the desired wavelength. The N7776C features a single optical output with more than +12 dBm output power (+19.4 dBm for option 013). It combines high power with lowest SSE level in the family, 80 dB/nm below the signal (50 dB/nm for option 013). The N7778C and N7779C come with more than +12 dBm output power, 75 dB/nm above their spontaneous emission level (+18 dBm, 50 dB/nm above SSE level for N7778C-013). The excellent low-SSE performance of better than 80 dB/nm signal-to-source spontaneous emission ratio (signal-to-SSE ratio) and the high signal power permit measurements of wavelength isolation to 100 dB, most often limited only by power meter sensitivity.

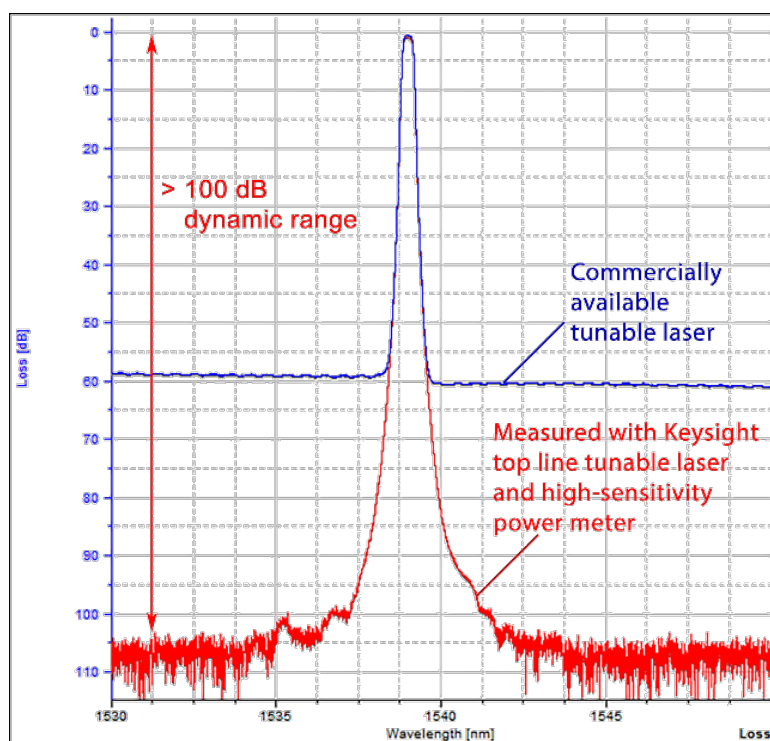


Figure 3. Crosstalk of a 50 GHz DWDM filter, measured with the N7747C high-sensitivity power meter

For all N777-C models, the output power can be adjusted between the maximum power and 0 dBm (+5 dBm for option 013). Such adjustment can be used to optimize the dynamic range of a measurement by matching the signal range output from the device under test to the best-fitting power range of the optical power meter.

Built-in wavelength meter for optimum tuning precision

The Keysight N777-C Family of Tunable Laser Sources includes a built-in real time wavelength meter which realizes the family's excellent absolute and relative wavelength accuracy and delivers wavelength logging data after each sweep.

The new Keysight N7776C takes this concept even further by adding a gas cell for long-term stability and absolute referencing. The wavelength reference unit's faster response and finer wavelength resolution enable the N7776C to sweep with sub-picometer repeatability. It is the key to the N7776C's superior accuracy and temperature stability, and it enables a greater degree of self-diagnosis than previously possible. The Keysight N7778C and N7779C share the N7776C's long-term stability due to the built-in gas cell yet mark different performance levels with respect to wavelength accuracy and repeatability.

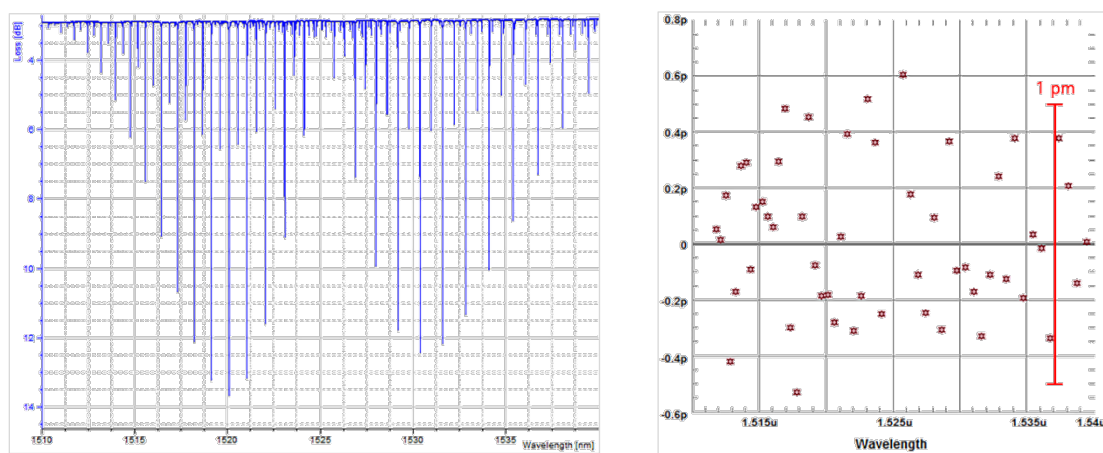


Figure 4. Deviation of C₂H₂ absorption wavelengths from literature, measured at 200 nm/s sweep speed

Realize the cost efficiency and performance benefits in WDM component tests

The testing of optical filters is based on a generic principle, namely the stimulus-response test. The state-of-the-art approach is a wavelength-resolved stimulus-response measurement utilizing a tunable laser source that is capable of fast and precise sweeps across the entire wavelength range, and optical power meters.

For DWDM components, high wavelength accuracy and dynamic range are critical. For CWDM and PON components, a wide wavelength range, dynamic range and tight costing are key targets. If the investment in the test solution can be shared among many different types of filters, the contribution to each individual filter is minimized. In this way, cost targets for CWDM and PON components can be met without sacrificing accuracy.

Investing in the Keysight N777-C Family of Tunable Laser Sources can realize both the cost efficiency and performance benefits required.

Polarization maintaining fiber for the test of integrated optical devices

The N777-C Family of Tunable Laser Sources is ideal for characterizing integrated optical devices. Its PMF output ports provide a well-defined state of polarization to ensure constant measurement conditions for waveguide devices. A PMF cable easily connects to an external optical modulator.

Eliminating the influence of the atmosphere

The high selectivity of the laser cavity of the N777-C family makes it possible to detect water molecules in the atmosphere. If measurements are carried out in wavelength areas with a high density of water absorption lines, such as 1360 nm to 1450 nm, it is recommended to purge the laser with dry air or Nitrogen. This eliminates the influence of the atmosphere on the laser's wavelength accuracy and repeatability. The optional adapter N7799C-DRY attaches to the rear side of the instrument and provides a standard inlet for compressed, dry air or nitrogen according to Euro standard 7.6 (7.4).

Certified quality

The N777-C TLS are produced to the ISO 9001 international quality system standard as part of Keysight's commitment to continually increasing customer satisfaction through improved quality control. Specifications describe the instrument's warranted performance. They are verified at the end of a 2-meter-long patch cord and are valid after warm-up, and for the stated output power and wavelength ranges. Every instrument is delivered with a commercial certificate of calibration and a detailed test report.

Specifications

Describe guaranteed product performance that is valid under stated conditions. The confidence level is 95%, as recommended by the ISO standard.

Typical values and supplementary performance characteristics

Describe product performance that is usually met but not guaranteed. For further details on specifications, refer to Chapter 3 in the Keysight N777-C Family of Tunable Lasers User's Guide.

Important note:

At this time, specifications for the new option 013 are preliminary.

Wavelength and Power Options

Wavelength range	N7776C, N7778C	N7779C
	1250 nm to 1370 nm (Option 013)	
	1240 nm to 1380 nm (Option 113)	1240 nm to 1380 nm (Option 113)
	1340 nm to 1495 nm (Option 114)	1340 nm to 1495 nm (Option 114)
	1490 nm to 1640 nm (Option 116)	1490 nm to 1640 nm (Option 116)
	1450 nm to 1650 nm (Option 216)	1450 nm to 1650 nm (Option 216)
Maximum output power	Option 013 (N7776C)	
	> +19.4 dBm peak	
	> +19 dBm (1300 nm – 1335 nm)	
	> +18 dBm (1290 nm – 1340 nm)	
	> +16 dBm (1270 nm – 1360 nm)	
	> +14 dBm (1265 nm – 1365 nm)	
	> +11 dBm (1250 nm – 1370 nm)	
	Option 013 (N7778C)	
	> +18 dBm peak	
	> +16 dBm (1290 nm – 1340 nm)	
	> +12 dBm (1260 nm – 1360 nm)	
	> +10 dBm (1250 nm – 1370 nm)	
	Option 113 (N7776C, N7778C, N7779C)	
	> +13 dBm peak	
	> +11 dBm (1290 nm – 1340 nm)	
	> +10 dBm (1260 nm – 1360 nm)	
	> +5 dBm (1240 nm – 1380 nm)	
	Option 114 (N7776C, N7778C, N7779C)	
	> +12 dBm peak	
	> +11 dBm (1410 nm – 1470 nm)	
	> +8 dBm (1370 nm – 1490 nm)	
	> +5 dBm (1340 nm – 1495 nm)	
	Option 116 (N7776C, N7778C, N7779C)	
	> +12 dBm peak	
	> +11 dBm (1515 nm – 1620 nm)	
	> +8 dBm (1490 nm – 1640 nm)	
	Option 216 (N7776C, N7778C, N7779C)	
	> +12 dBm peak	
	> +11 dBm (1515 nm – 1620 nm)	
	> +9 dBm (1480 nm – 1630 nm)	
	> +5 dBm (1450 nm – 1650 nm)	
Minimum output power setting	N7776C, N7778C, N7779C	
	0 dBm (Options 113, 114, 116, 216)	
	+6 dBm (Option 013, N7776C and N7778C only)	

Wavelength Tuning and Spectral Performance

Wavelength tuning	N7776C, N7778C		N7779C
Wavelength resolution	0.1 pm (17.5 MHz at 1310 nm, 14.3 MHz at 1450 nm, 12.5 MHz at 1550 nm)		
Continuous tuning range	Full wavelength range, mode-hop free		
Tuning time (characteristic) ¹	300 ms (1 nm step, max. output power)		
	1.5 s (100 nm step, max. output power)		
Continuous sweep range	Full wavelength range ^{6, 7} , continuous power during sweep		Not applicable
Max. sweep speed	200 nm/s, bidirectional		Not applicable
Spectral performance	N7776C	N7778C	N7779C
Side-mode suppression ratio (SMSR) (typical) ^{2, 8}	≥ 70 dB ³	≥ 70 dB ³	≥ 70 dB ³
	≥ 60 dB ⁴	≥ 60 dB ⁴	≥ 60 dB ⁴
Relative intensity noise (RIN) (typical, 0.1 to 6 GHz) ^{2, 3}	< -150 dB/Hz < -155 dB/Hz (#013)	< -150 dB/Hz < -155 dB/Hz (#013)	< -145 dB/Hz
Signal to source spontaneous emission ratio ^{2, 5}	≥ 80 dB/nm ≥ 50 dB/nm (#013)	≥ 75 dB/nm ≥ 50 dB/nm (#013)	≥ 75 dB/nm
	≥ 90 dB/0.1 nm ≥ 60 dB/0.1 nm (#013)	≥ 85 dB/0.1 nm ≥ 60 dB/0.1 nm (#013)	≥ 85 dB/0.1 nm
Signal to total source spontaneous emission ratio ^{2, 5}	≥ 75 dB ≥ 40 dB (#013, typ.)	≥ 70 dB ≥ 38 dB (#013, typ.)	≥ 70 dB
Linewidth (intrinsic ⁹ , typical), coherence control off	< 10 kHz	< 10 kHz	< 10 kHz
Effective linewidth (typical), coherence control on ^{2, 3}	> 50 MHz > 150 MHz (#013)	> 50 MHz > 150 MHz (#013)	> 50 MHz

1. Including power stabilization. When "step finished" trigger is received.

2. At maximum output power.

3. 1290 nm – 1340 nm (Options 013, 113), 1410 nm – 1470 nm (Option 114), 1515 nm – 1620 nm (Options 116, 216).

4. 1250 nm – 1380 nm (Options 013, 113), full wavelength range (Options 114, 116, 216)

5. 1320 nm – 1350 nm (Options 013, 113), 1410 nm – 1460 nm (Option 114), 1520 nm – 1580 nm (Options 116, 216).

6. Full wavelength range for sweep speeds ≤ 50 nm/s.

Full wavelength range reduced by 0.5 nm on both ends for 80 nm/s sweep speed.

Full wavelength range reduced by 3 nm on both ends for sweep speeds ≥ 100 nm/s and ≤ 150 nm/s.

Full wavelength range reduced by 5 nm on both ends for ≥ 160 nm/s sweep speed.

7. Mode-hop free tunable across the full wavelength range, except:

Stop wavelength below 1345 nm (Option 013, 113).

Start wavelength above 1420 nm (Option 114).

8. Measures the impact of side-modes on RIN. Contributions from upper and lower side-modes cancel partially.

9. Based on white-noise contribution to phase noise. Note that the wavelength also oscillates over a typical range of up to 0.4 pm during a 1 ms timespan.

N7776C Tunable Laser Source, Top Line, High Power with Low SSE

Wavelength accuracy and optical power stability	Stepped mode	Continuous sweep mode, both directions (typical) ^{3, 4}
Absolute wavelength accuracy ¹	± 2 pm Typical ± 1.5 pm	± 1.5 pm
Relative wavelength accuracy ¹	± 1.5 pm Typical ± 1 pm	± 1 pm
Wavelength repeatability	± 0.5 pm ± 0.4 pm, Option 013 Typical ± 0.2 pm	± 0.3 pm ± 0.4 pm, Option 013
Wavelength stability ²	Typical ≤ ± 0.5 pm, 24 hours	Not applicable
Power repeatability (typical)	± 0.002 dB	Not applicable
Power stability ²	± 0.01 dB, 1 hour Typical ± 0.025 dB, 24 hours	Not applicable
Power linearity	± 0.05 dB ± 0.25 dB	Not applicable
Power flatness versus wavelength	Typical ± 0.1 dB, Options 116, 216 Typical ± 0.15 dB, Options 013, 113, 114	Not applicable
Dynamic power reproducibility	Not applicable	± 0.01 dB
Dynamic relative power flatness	Not applicable	± 0.02 dB ⁵

1. Valid for 24 hours and within ± 5 K temperature range after wavelength zeroing.
2. At constant temperature ± 1 K.
3. Full wavelength range for sweep speeds ≤ 50 nm/s.
Full wavelength range reduced by 0.5 nm on both ends for 80 nm/s sweep speed.
Full wavelength range reduced by 3 nm on both ends for sweep speeds ≥ 100 nm/s and ≤ 150 nm/s.
Full wavelength range reduced by 5 nm on both ends for ≥ 160 nm/s sweep speed.
Mode-hop free tunable across the full wavelength range.
4. Mode-hop free tunable across the full wavelength range, except:
Stop wavelength below 1345 nm (Option 013, 113).
Start wavelength above 1420 nm (Option 114).
5. Add ± 0.01 dB for sweep speeds > 80 nm/s.

N7778C Tunable Laser Source, Value Line, High Power with Low SSE

Specifications in this table apply with option N7778C-004: enhanced wavelength accuracy and stability.

Wavelength accuracy and optical power stability	Stepped mode	Continuous sweep mode, both directions (typical) ^{3,4}
Absolute wavelength accuracy ¹	± 9 pm Typical ± 4 pm	± 4 pm
Relative wavelength accuracy ¹	± 5 pm Typical ± 3 pm	± 2.5 pm
Wavelength repeatability	± 2 pm Typical ± 1 pm	± 1 pm
Wavelength stability ²	Typical ≤ ± 1.5 pm, 24 hours Typical ≤ ± 0.5 pm, 1 ms	Not applicable
Power repeatability (typical)	± 0.01 dB	Not applicable
Power stability ²	± 0.01 dB, 1 hour Typical ± 0.03 dB, 24 hours	Not applicable
Power linearity	± 0.1 dB	Not applicable
Power flatness versus wavelength	± 0.25 dB Typical ± 0.1 dB, Options 116, 216 Typical ± 0.15 dB, Options 013, 113, 114	Not applicable
Dynamic power reproducibility	Not applicable	± 0.01 dB
Dynamic relative power flatness	Not applicable	± 0.02 dB ⁵

1. Valid for 24 hours and within ± 5 K temperature range after wavelength zeroing.
2. At constant temperature ± 1 K.
3. Full wavelength range for sweep speeds ≤ 50 nm/s.
Full wavelength range reduced by 0.5 nm on both ends for 80 nm/s sweep speed.
Full wavelength range reduced by 3 nm on both ends for sweep speeds ≥ 100 nm/s and ≤ 150 nm/s.
Full wavelength range reduced by 5 nm on both ends for ≥ 160 nm/s sweep speed.
Mode-hop free tunable across the full wavelength range.
4. Mode-hop free tunable across the full wavelength range, except:
Stop wavelength below 1345 nm (Option 013, 113).
Start wavelength above 1420 nm (Option 114).
5. Add ± 0.01 dB for sweep speeds > 80 nm/s.

N7779C Step-Tunable Laser Source, Basic Line, High Power with Low SSE

Stepped mode

Absolute wavelength accuracy ¹	± 30 pm; typical ± 10 pm
Relative wavelength accuracy ¹	± 15 pm; typical ± 5 pm
Wavelength repeatability	± 5 pm; typical ± 3 pm
Wavelength stability ²	Typical ≤ ± 5 pm, 24 hours Typical ≤ ± 0.5 pm, 1 ms
Power repeatability (typical)	± 0.01 dB
Power stability ²	± 0.01 dB, 1 hour Typical ± 0.03 dB, 24 hours
Power linearity	± 0.1 dB
Power flatness versus wavelength	± 0.25 dB Typical ± 0.1 dB, Options 116, 216 Typical ± 0.15 dB, Options 113, 114

1. Valid for 24 hours and within ± 5 K temperature range after wavelength zeroing.

2. At constant temperature ± 1 K.

Specification Conditions

Environmental conditions

Storage temperature	–40 °C to +70 °C (Option D00, standard front panel) –30 °C to +70 °C (Option D01, touchscreen display)
Operating temperature	+10 °C to +35 °C
Humidity	≤ 80% R.H. at +10 °C to +35 °C, non-condensing
Max. operating altitude	2000 m (6600 ft)

All specifications are typical at wavelengths < 1250 nm

Specifications apply for wavelengths not equal to any water absorption line.

Note: if the laser is operated in a dry box filled with dry air or nitrogen, specifications also apply at water absorption lines. Alternatively, use the optional adapter N7799C-DRY to purge the laser with a flux of 50 l/min. The adapter N7799C-DRY attaches to the rear side of the instrument and provides a standard inlet for compressed, dry air or nitrogen according to Euro standard 7.6 (7.4).

Warm-up time	60 minutes; immediate operation after boot-up 30 minutes if previously stored at the same temperature
Sweep speed	Continuous sweep range (N7776C, N7778C)
≤ 50 nm/s	Full wavelength range
80 nm/s	Full wavelength range reduced by 0.5 nm on both ends
≥ 100 nm/s and ≤ 150 nm/s	Full wavelength range reduced by 3 nm on both ends
≥ 160 nm/s	Full wavelength range reduced by 5 nm on both ends

Supplementary Performance Characteristics

External wavelength locking	N7776C
Modulation depth	> ± 70 pm at 10 Hz > ± 7 pm at 100 Hz
Modulation input	± 5 V
Coherence control	N7776C, N7778C, N7779C
For measurements on components with 2 m long patch cords and connectors with 14 dB return loss, the effective linewidth results in a typical power stability of < ± 0.025 dB over 1 minute by significantly reducing interference effects in the test setup.	
Available at max. output power, for wavelength range 1290 nm – 1340 nm (Options 013, 113), 1420 nm – 1470 nm (Option 114), 1515 nm – 1620 nm (Options 116, 216).	
Output isolation	N7776C, N7778C, N7779C
	Built-in optical isolator

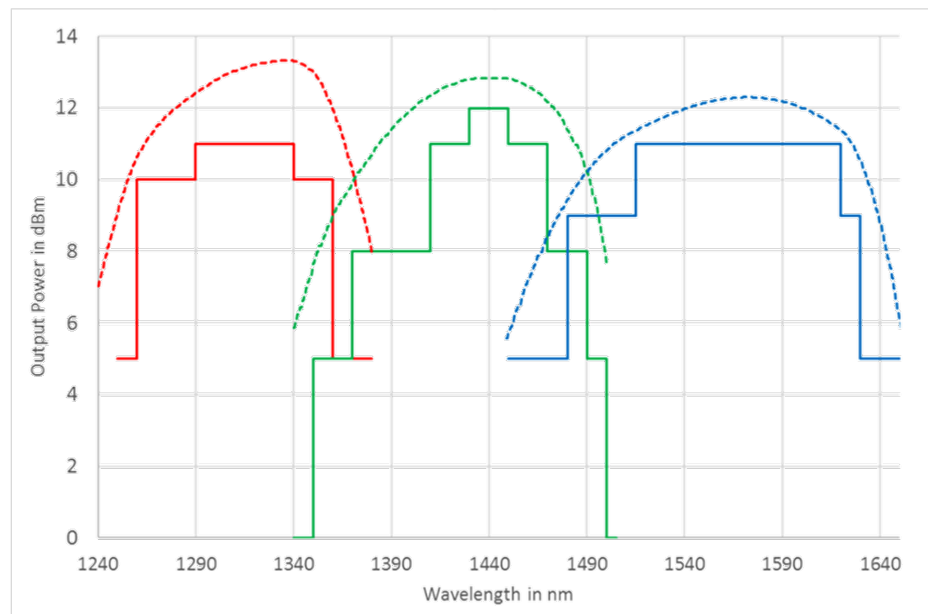


Figure 5. Wavelength coverage of options 113 (red), 114 (green) and 216 (blue). Typical maximum output power (dotted line) vs. specified output power (solid lines).

General Specifications

Return loss	N7776C, N7778C, N7779C
Return loss, typical	60 dB
Optical connector	N7776C, N7778C, N7779C
	All modules come with PMF, angled contact output connector
Polarization maintaining fiber	N7776C, N7778C, N7779C
Fiber type	Panda
Orientation	Electrical field is oriented in slow axis, in line with the connector key
Polarization extinction ratio	16 dB typical
Re-calibration	N7776C, N7778C, N7779C
Recommended re-calibration period	2 years
Laser safety information	N7776C, N7778C, N7779C
All laser sources specified by this data sheet are classified as Class 1M according to IEC 60825-1 (2017)	
All laser sources comply with 21 CFR 1040.10 except for deviations pursuant to Laser Notice No. 50, dated 2007, June 24. 	
Power	N7776C, N7778C, N7779C
	AC 100 to 240 V $\pm$ 10%, 50/60 Hz, 200 VA max.
Dimensions	N7776C, N7778C, N7779C
Dimensions (height x width x length)	88 mm x 426 mm x 545 mm (3.5" x 16.9" x 21.6")
Weight	Approx. 8.5 kg net (17 lbs) Shipping 13 kg (26 lbs)
Connectivity	N7776C, N7778C, N7779C
USB	USB 2.0 (mass storage device, USB to Ethernet interface) 10/100/1000BASE-T Ethernet port
Local Area Network (LAN)	Host name printed on instrument label DHCP optional
Trigger	BNC
User interface	N7776C, N7778C, N7779C
LAN access	IP address via browser
USB access	Remote NDIS access via browser
Data input/ output	N7776C, N7778C, N7779C
Optical power	Linear (Watt) and logarithmic (dBm), digital and analog
Wavelength	m, μ m, nm
Frequency	Hz, THz
Sampling resolution	0.01 pm 0.01 dB; 0.1 mW

Ordering Information

Tunable laser module: N7776C top-line, ± 1.5 pm typical wavelength accuracy (choose one of the following)

N7776C-013	Tunable laser source 1250 nm to 1370 nm, top-line, extra-high power with low SSE
N7776C-113	Tunable laser source 1240 nm to 1380 nm, top-line, high power with lowest SSE
N7776C-114	Tunable laser source 1340 nm to 1495 nm, top-line, high power with lowest SSE
N7776C-116	Tunable laser source 1490 nm to 1640 nm, top-line, high power with lowest SSE
N7776C-216	Tunable laser source 1450 nm to 1650 nm, top-line, high power with lowest SSE

Tunable laser module: N7778C value line, ± 4 pm typical wavelength accuracy (choose one of the following)

N7778C-013	Tunable laser source 1250 nm to 1370 nm, value line, extra-high power with low SSE
N7778C-113	Tunable laser source 1240 nm to 1380 nm, value line, high power with low SSE
N7778C-114	Tunable laser source 1340 nm to 1495 nm, value line, high power with low SSE
N7778C-116	Tunable laser source 1490 nm to 1640 nm, value line, high power with low SSE
N7778C-216	Tunable laser source 1450 nm to 1650 nm, value line, high power with low SSE
N7778C-004	Enhanced wavelength accuracy and stability (mandatory)

Tunable laser module: N7779C basic line, ± 10 pm typical wavelength accuracy (choose one of the following)

N7779C-113	Step-tunable laser source 1240 nm to 1380 nm, basic line, high power with low SSE
N7779C-114	Step-tunable laser source 1340 nm to 1495 nm, basic line, high power with low SSE
N7779C-116	Step-tunable laser source 1490 nm to 1640 nm, basic line, high power with low SSE
N7779C-216	Step-tunable laser source 1450 nm to 1650 nm, basic line, high power with low SSE

Front panel options

N7776C-D00	Standard front panel
N7778C-D00	
N7779C-D00	
N7776C-D01	Touchscreen display, 5 inches
N7778C-D01	
N7779C-D01	

Photonic application suite software licenses

N7700100C ¹	Polarization-Lambdascan Measurement License (PLS)
N7700101C ¹	DWDM Channel Analysis License (DWDM)
N7700102C ¹	Fast Lambdascan Measurement License (FLS)
N7700103C ¹	Polarization Mode Dispersion Measurement License (PMD)

Custom-made tunable laser

Additional wavelength ranges or higher output power are available on request. Please contact your local Keysight Sales Office.

Required accessories

Connector interface One Keysight 81000xl-series connector interface is required per instrument

Recommended accessories

N7799C-2CM	Rack mount kit for N77 instrument with 2 rack units (2-RU) height
N7799C-DRY	Dry air adapter for N777-C tunable lasers

1. For more detailed information and license terms and please refer to the Photonic Application Suite technical overview (publication number 3120-1024.EN).