


Keysight Technologies

ISDB-T/Tmm

X-Series Measurement Application

N6155A & W6155A

Technical Overview



Introduction

- Measure ISDB-T or ISDB-Tmm RF transmitter, modulator, gap-filler, tuner, or amplifier performance
- Auto-detect the ISDB-T demodulation parameters and display in the TMCC decoding view; auto-detect and show the ISDB-Tmm configuration by super segment
- Single frequency network measurement (supports pre-, post-, 0-dB, and out-of-GI echo scenarios)
- Show the AC (auxiliary channel) decoded bits in AC decoding results view
- Perform one-button tests with pass/fail limit per ISDB-T and ISDB-T_{SB} standards
- Use hardkey/softkey manual user interface or SCPI remote control
- Leverage built-in context sensitive help
- Move application between X-Series signal analyzers with transportable licensing

ISDB-T/Tmm Measurement Application

The ISDB-T/Tmm measurement application provides one-button, standard-based power and modulation analysis capabilities to help you with designing, evaluating, and manufacturing ISDB-T modulators, transmitters, amplifiers, tuners, and gap-fillers/repeaters. Used with the optional analog baseband IQ inputs in the PXA or MXA signal analyzer, it can provide you the flexibility of measuring signal quality and modulation accuracy with RF input or analog IQ input.


The ISDB-T/Tmm measurement application is just one in a common library of more than 25 measurement applications in the Keysight Technologies, Inc. X-Series, an evolutionary approach to signal analysis that spans instrumentation, measurements, and software.

The X-Series analyzers, with upgradeable CPU, memory, disk drives, and I/O

ports, enable you to keep your test assets current and extend instrument longevity. Proven algorithms, 100% code-compatibility, and a common UI across the X-Series create a consistent measurement framework for signal analysis that ensures repeatable results and measurement integrity so you can leverage your test system software through all phases of product development. In addition to fixed, perpetual licenses for our X-Series measurement applications, we also offer transportable licenses which can increase the value of your investment by allowing to you transport the application to multiple X-Series analyzers.

Key parameter setup

- Radio standard: ISDB-T, or ISDB-T_{SB}, and ISDB-Tmm
- Channel bandwidth: 6/ 7/ 8 MHz for ISDB-T; 14.5 MHz for ISDB-Tmm
- Segment number: 13 segments for ISDB-T, 1 or 3 segments for ISDB-T_{SB}, 33 segments for ISDB-Tmm
- FFT mode: 2K, 4K or 8K
- Guard interval: 1/4, 1/8, 1/16, 1/32
- Partial reception: On/Off
- Modulation: QPSK/16QAM/64QAM
- Input: RF or analog IQ (only available in the N9030A PXA or N9020A MXA) for signal quality and modulation accuracy measurements

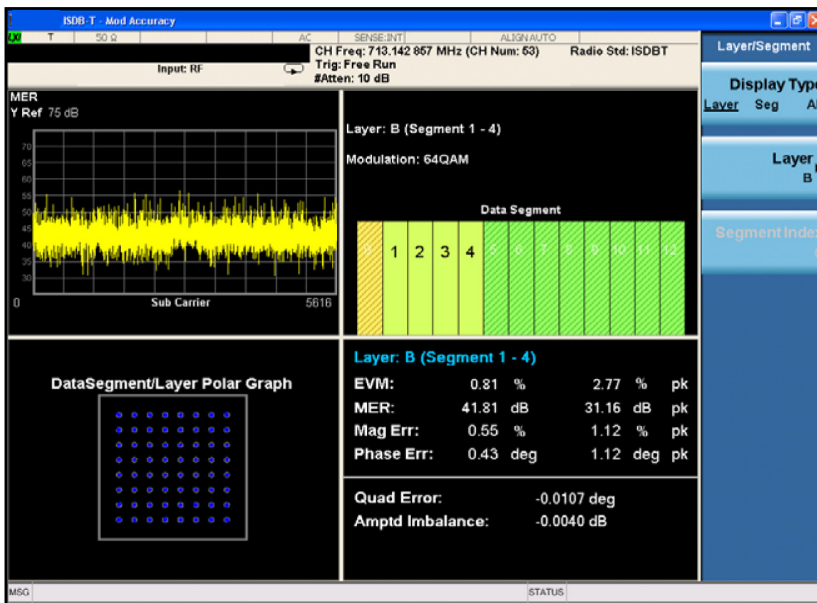

ISDB-T, ISDB-T_{SB}, and ISDB-Tmm Standards Overview

ISDB-T, ISDB-T_{SB} and ISDB-T_B

Integrated services digital broadcasting (ISDB) is a Japanese standard for digital television (DTV) and digital radio used by the country's radio and television stations. ISDB-T and ISDB-T_{SB} standards are the digital terrestrial broadcasting systems developed by Japan's Association of Radio Industries and Business (ARIB). ISDB-T, as a terrestrial broadcasting system, has also been adopted by Brazil, where it is called ISDB-T_B. ISDB-T and ISDB-T_B both use an identical physical layer. ISDB-T_{SB} is used for audio and data program transmissions. The system and specifications of ISDB-T_{SB} are similar to ISDB-T, except that the bandwidth is narrower and there are only one or three segments in the channel. Keysight's ISDB-T measurement application supports measurement on both ISDB-T and ISDB-T_{SB} standards.

ISDB-Tmm and AC

The new VHF band, 207.5 to 222 MHz, introduced in 2011, after the analog TV switch-off in Japan. The government announced that ISDB-Tmm (Terrestrial Mobile Multimedia) will be used for new multimedia service in this band. The ISDB-Tmm standard employs the concatenated transmission method which, combining blocks of the 13-segment (Type A) and the 1-segment (Type B), eliminates the need for a guard band, making it possible to apply it to various bandwidths. Figure 2 is an example of ISDB-Tmm frame structure consisting of two Type A super segments and one Type B super segment.

Auxiliary channel (AC) is used to convey additional information on modulation signal-transmission control, or earthquake alarm information. The earthquake information is transmitted using the AC of the center segment (segment No. 0).

Segment and layer in ISDB-T

ISDB-T supports hierarchical transmission by introducing hierarchical layers, which means different services such as HDTV, multi-channel SDTV, and data, can be transmitted in one frequency channel. There are 13 OFDM segments in the ISDB-T transmission channel. Each layer consists of one or more segments which have their own transmission parameters (such as the inner coding rate, modulation scheme, and time interleaving length). A maximum of three layers can be provided, defined as Layer A, B, and C.

Partial reception

ISDB-T also supports partial receptions. Partial reception refers to the segment at the center of the transmission system. The range of frequency interleaving can be limited within the segment, so that narrow band (1-seg) receiver can receive services contained in the center segment. The general concept of hierarchical transmission and partial reception is shown in Figure 1.

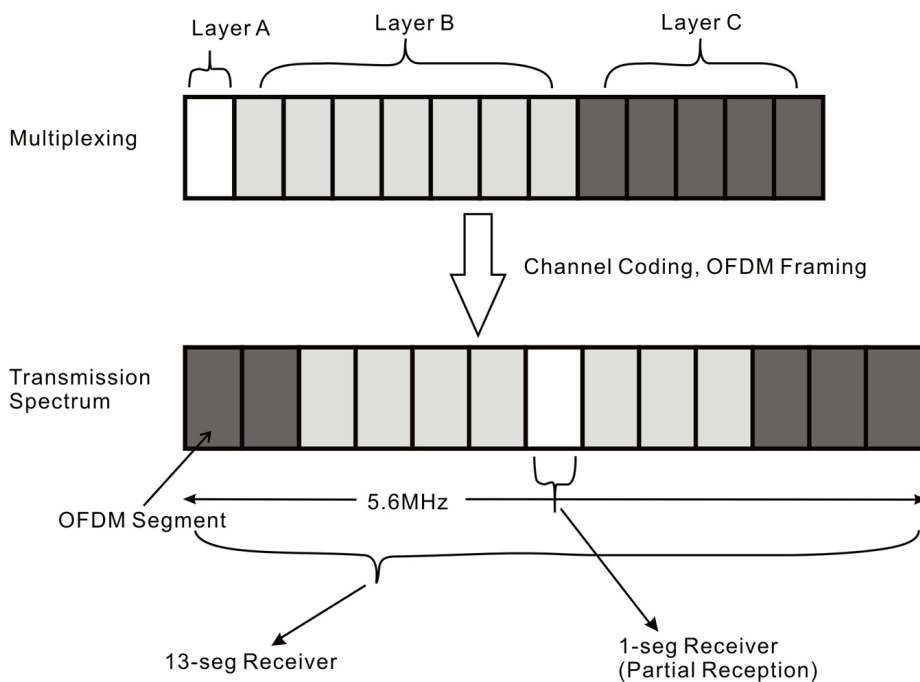


Figure 1. Hierarchical transmission and partial reception in ISDB-T

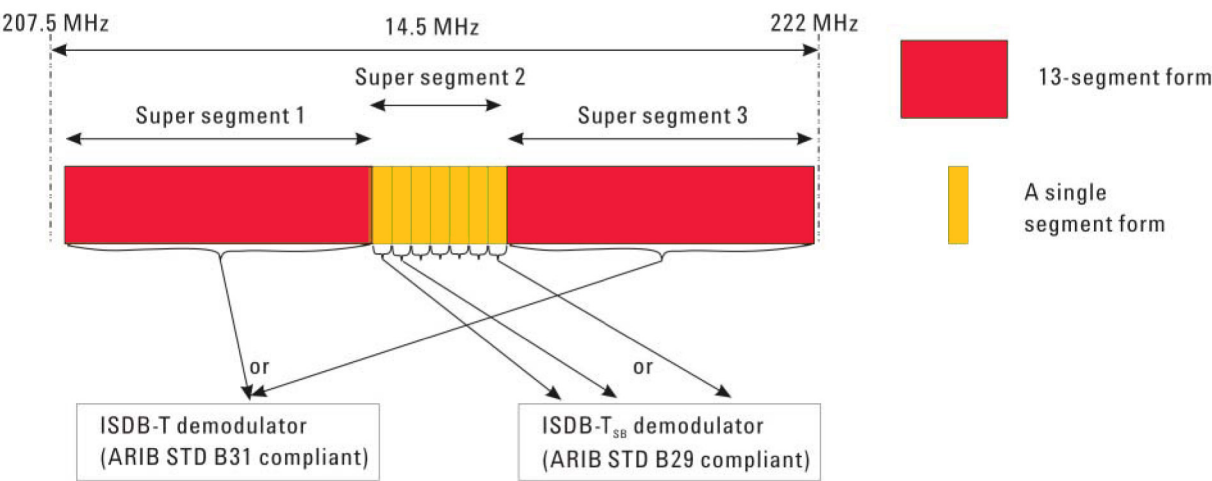


Figure 2. ISDB-Tmm frame configuration

Table 1. Key parameters in ISDB-T and ISDB-Tsb standards

	ISDB-T	ISDB-Tsb	ISDB-Tmm
Frequency	UHF 470 to 770 MHz	VHF/UHF	VHF: 207.5 to 222 MHz
Bandwidth	6, 7, 8 MHz	430 kHz for 1-segment and 1.3 MHz for 3-segments for 6 MHz system	6 to 14.5 MHz
Segments	13 segments	1 or 3 segments	13 to 33 segments
Modulation	OFDM	OFDM	OFDM
Mode	Mode 1 /2/3	Mode 1 /2/3	Mode 1 /2/3
Modulation format	DQPSK/QPSK/16QAM/64QAM	DQPSK/QPSK/16QAM/64QAM	DQPSK/QPSK/16QAM/64QAM
Guard interval	1 /4, 1 /8, 1/16, 1/32	1 /4, 1 /8, 1/16, 1/32	1 /4, 1 /8, 1/16, 1/32
FEC	Inner coding: Convolution 1 /2, 2/3, 3 /4, 5/6, 7 /8 Outer coding: Reed Solomon (204, 188)	Inner coding: Convolution 1 /2, 2/3, 3 /4, 5/6, 7 /8 Outer coding: Reed Solomon (204, 188)	Inner coding: Convolution 1 /2, 2/3, 3 /4, 5/6, 7 /8 Outer coding: Reed Solomon (204,188)
Multiplexing	MPEG-2 TS	MPEG-2 TS	MPEG-2 TS
Video	MPEG-2 video or MPEG-4 AVC/H.264 (1-seg)	MPEG-2 video or MPEG-4 AVC/H.264 (1-seg)	MPEG-2 video or MPEG-4 AVC/H.264 (1-seg)
Audio	MPEG-2 audio (AAC)	MPEG-2 audio (AAC)	MPEG-2 audio (AAC)
Bit rate	3.651 ~ 23.234 Mb/s	0.280 ~ 1.787 Mb/s	
Other	Supports partial reception and AC		

Transmitter Tests

The RF transmitter test requirements for ISDB-T are defined in the JEITA handbook “Methods of Measurement for Digital Terrestrial Broadcasting Transmitters.” Table 2 shows the required base station RF transmitter tests along with the corresponding measurement applications.

Table 2. Required RF transmitter measurements and the corresponding measurements in N/W6155A

JEITA handbook V2.2 Paragraph #	Transmitter test	N/W6155A ISDB-T measurement application
4.3.1	Frequency deviation	Spectrum analyzer mode (marker counter function)
4.3.2	Signal power	Channel power
4.3.3	Occupied frequency bandwidth	Occupied bandwidth (BW)
4.3.4	Spectrum mask	Spectrum emission mask
4.3.5	Unwanted emissions	Spectrum analyzer mode (spurious emissions measurement)
4.3.6	IFFT sampling frequency deviation	Spectrum analyzer mode (marker counter function)
4.3.7	Phase noise	N/W9068A phase noise measurement application
4.3.8	Amplitude-frequency characteristics	Monitor spectrum measurement
4.3.9	Group delay characteristics	Mod accuracy (frequency response view)
4.3.10	Delay time	N/A
4.3.11	Intermodulation	Monitor spectrum measurement
4.3.12	Gaussian noise vs. BER	N/A
4.3.13	Input electric field strength vs. BER	N/A
4.3.14	Power consumption	N/A
4.3.15	Input signal	Mod accuracy (TMCC decoding view)
4.3.17	Output mismatching range	Spectrum analyzer mode
4.3.18	MER characteristics	Mod accuracy (result metrics view)
4.3.19	Actual viewing of and listening to video and sound	N/A

Measurement Details

Most of the RF transmitter measurements as defined by the ISDB-T standard, as well as a wide range of additional measurements and analysis tools, are available with a press of a button (Table 3). These measurements are fully remote controllable via the IEC/IEEE bus or LAN, using SCPI commands.

Analog baseband measurements are available on the Keysight PXA or MXA signal analyzer equipped with BBIQ hardware. Supported baseband measurements include all of the modulation quality plus I/Q waveform measurements.

Table 3. One-button measurements provided by the N/W6155A measurement application

Technology	ISDB-T	ISDB-T _{SB}	ISDB-Tmm
Measurement application	N6155A-2FP, W6155A-2FP	N6155A-2FP, W6155A-2FP	N6155A-3FP, W6155A-3FP
X-Series analyzer	PXA, MXA, EXA, CXA ¹	PXA, MXA, EXA, CXA ¹	PXA, MXA, EXA, CXA ¹
Measurements			
Channel power			
RF spectrum	●	●	●
Shoulder attenuation	●	●	
Adjacent channel power	●	●	● ²
Spectrum emission mask	●	●	● ²
Power statistic CCDF	●	●	●
Spurious emission	●	●	●
Modulation accuracy			
RMS EVM (%)	●	●	●
Peak EVM (%)	●	●	●
Position of peak EVM	●	●	●
RMS MER (dB)	●	●	●
Peak MER (dB)	●	●	●
Position of peak MER	●	●	●
RMS mag error (%)	●	●	●
Peak mag error (%)	●	●	●
Position of peak mag error	●	●	●
RMS phase error (deg)	●	●	●
Peak phase error (deg)	●	●	●
Position of peak phase error	●	●	●
Frequency error (Hz)	●	●	●
Tx power (dBm)	●	●	●
Quadrature error (deg)	●	●	●
Amplitude imbalance (dB)	●	●	●
In-band spectrum ripple			
Amax-Ac (dB)	●	●	●
Amin-Ac (dB)	●	●	●
MER/EVM vs. subcarriers/frequency	●	●	●
MER by layer A/B/C (dB)	●	●	●
MER by data, pilot, TMCC, and AC1 (dB)	●	●	●
Amplitude vs. subcarriers (dB)	●	●	●
Phase vs. subcarriers (deg)	●	●	●
Group delay vs. subcarriers (ns)	●	●	●
Spectral flatness (dB)	●	●	●
TMCC decoding	●	●	●
AC decoding	●	●	●
ISDB-Tmm configuration	●	●	●
Channel impulse response	●	●	●
Single frequency network (SFN) test (Pre-echo, Post-echo, 0-dB echo, and out-of-GI echo)	●	●	●

1. N6155A operates in the PXA, MXA, and EXA signal analyzers. W6155A operates in the CXA signal analyzer.

2. This measurement in ISDB-Tmm mode requires manual configuration.

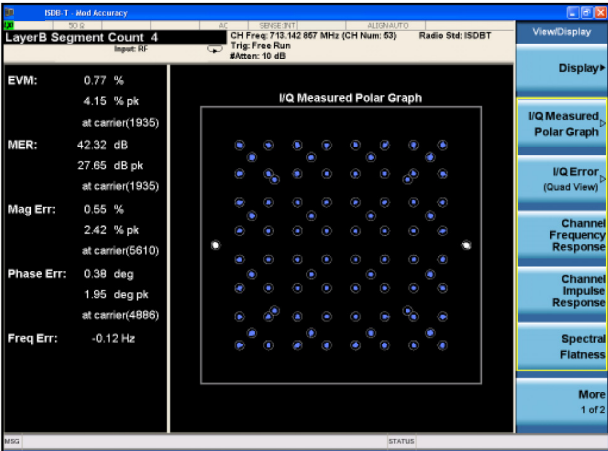


Figure 3. ISDB-T constellation and MER results

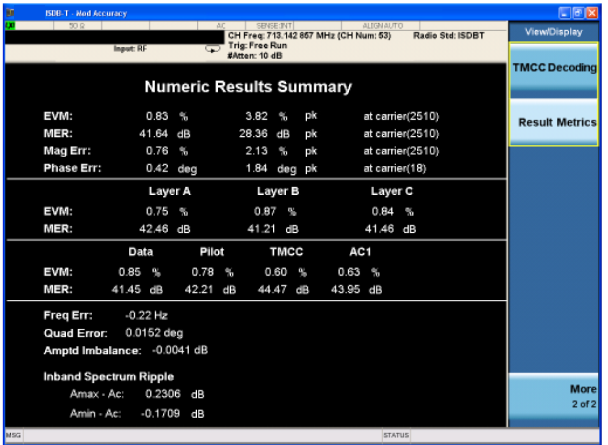


Figure 6. ISDB-T result metrics view

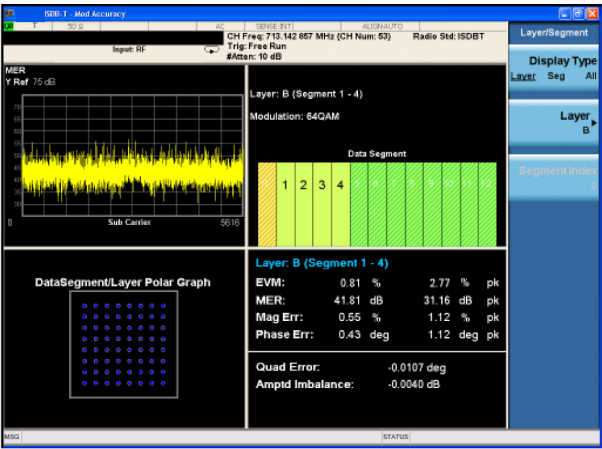


Figure 4. ISDB-T IQ quad view

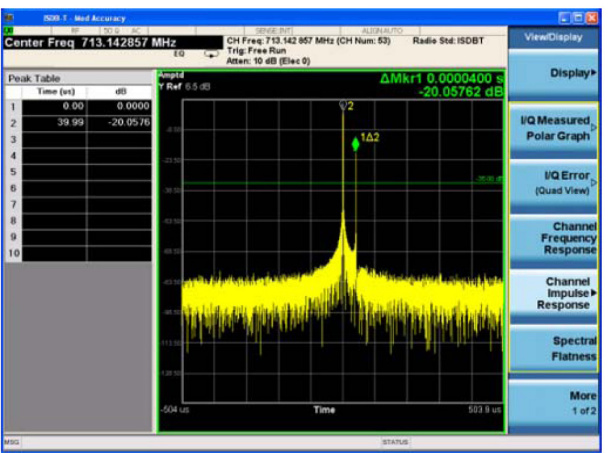


Figure 7. ISDB-T channel impulse response view

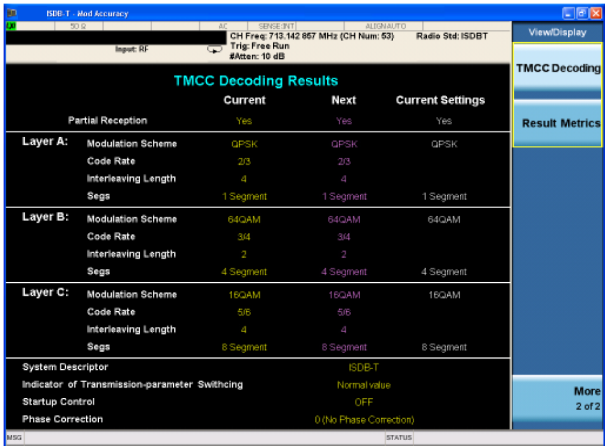


Figure 5. ISDB-T TMCC decoding view

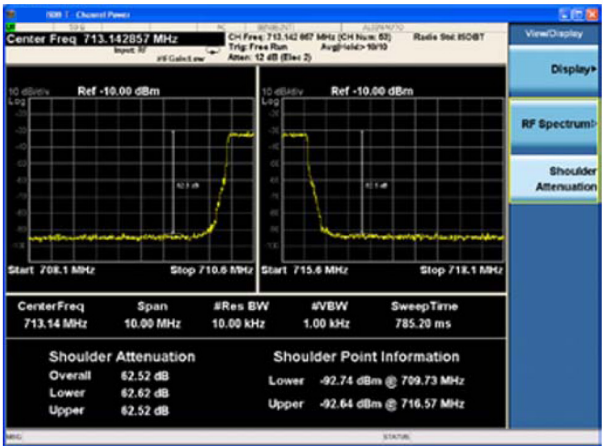


Figure 8. ISDB-T shoulder attenuation



Figure 9. ISDB-T AC decoding view

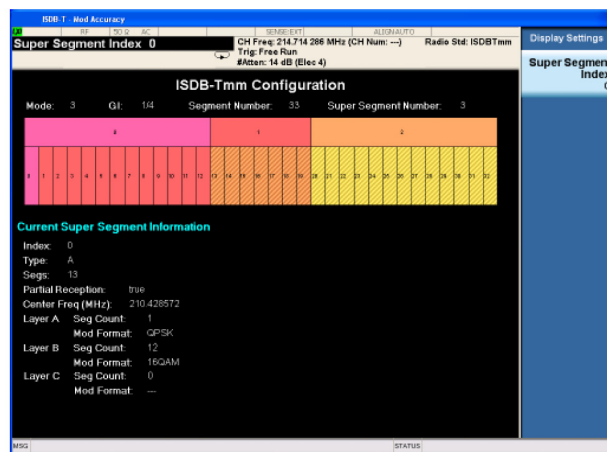


Figure 11. ISDB-Tmm configuration with Type A lowercase segments and super segment

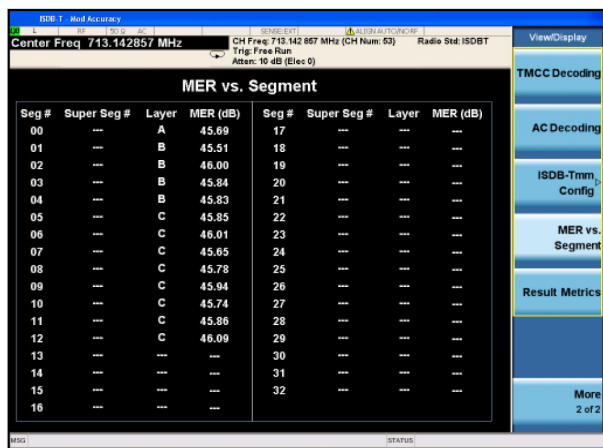


Figure 10. ISDB-Tmm MER vs. lowercase segments and super segment

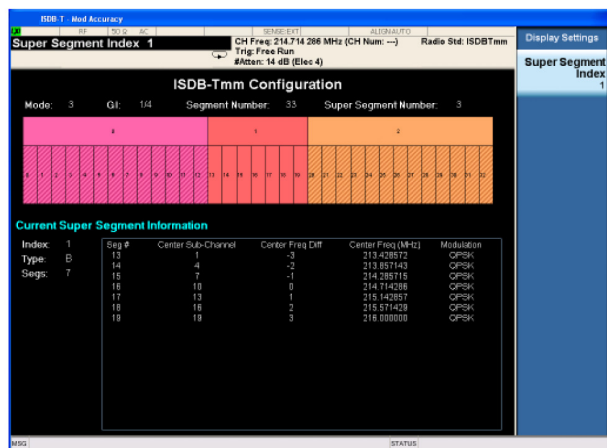


Figure 12. ISDB-Tmm configuration with Type B lowercase segments and super segment

Key Specifications

Definitions

- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence.
- Typical values are designated with the abbreviation “typ.” These are performance beyond specification that 80% of the units exhibit with a 95% confidence.
- Nominal values are designated with the abbreviation “nom.” These values indicate expected performance or describe product performance that is useful in the application of the product.
- PXA specifications apply to analyzers with frequency options of 526 and lower. For analyzers with higher frequency options, specifications are not warranted but performance will nominally be close to that shown in this section.

You Can Upgrade!

Options can be added after your initial purchase.

All of our X-Series application options are license-key upgradeable.



Note: Data subject to change

Description	PXA	MXA	EXA	CXA
Channel power				
5.60 MHz integration bandwidth	–50 dBm (nom)	–50 dBm (nom)	–50 dBm (nom)	–50 dBm (nom)
Absolute power accuracy 20 to 30 °C	± 0.61 dB (± 0.19 dB 95%)	± 0.82 dB (± 0.23 dB 95%)	± 0.94 dB (± 0.27 dB 95%)	± 1.33 dB (± 0.61 dB 95%)
Measurement floor	–87.2 dBm	–84.2 dBm	–80.2 dBm	–77.2 dBm
Channel power with shoulder attenuation view				
5.60 MHz integration bandwidth	ML ¹ = –14.0 dBm (nom)	ML ¹ = –16.0 dBm (nom)	ML ¹ = –16.0 dBm (nom)	ML ¹ = –15.0 dBm (nom)
Dynamic range, relative Offset frequency 3.4 MHz	92.9 dB (98.7 dB typ)	87.7 dB (94.1 dB typ)	82.5 dB (89.6 dB typ)	78.9 dB (86.6 dB typ)
Power statistics CCDF				
Minimum power at RF input	–50 dBm (nom)	–50 dBm (nom)	–50 dBm (nom)	–50 dBm (nom)
Histogram resolution	0.01 dB	0.01 dB	0.01 dB	0.01 dB
Adjacent channel power				
Minimum power at RF input; 0 to 55 °C	–36 dBm (nom)	–36 dBm (nom)	–36 dBm (nom)	–36 dBm (nom)
ACPR accuracy	5.60 MHz noise bandwidth, method = IBW			
Offset frequency 6 MHz	± 0.16 dB	± 0.38 dB	± 0.81 dB	± 1.20 dB

1. ML (mixer level) is RF input power minus attenuation

Description	PXA	MXA	EXA	CXA
Spectrum emission mask	Limit type: Manual; JEITA(ARIB-B31) according to $P \leq 0.025 \text{ W}$, $0.025 \text{ W} < P \leq 0.25 \text{ W}$, $0.25 \text{ W} < P \leq 2.5 \text{ W}$ or $P > 2.5 \text{ W}$: ABNT non-critical; ABNT sub-critical; ABNT-critical; ISDB-T _{SB}			
3.0 MHz offset (RBW = 10 kHz)				
Dynamic range, relative	93.8 dB (99.1 dB typ)	87.6 dB (93.9 dB typ)	82.3 dB (89.5 dB typ)	79.7 dB (86.4 dB typ)
Sensitivity, absolute	-110.5 dB (-114.5 dBm typ)	-106.5 dB (-111.5 dBm typ)	-101.5 dB (-107.5 dBm typ)	-98.5 dB (-104.5 dBm typ)
Accuracy				
Relative	± 0.08 dB	± 0.16 dB	± 0.16 dB	± 0.23 dB
Absolute, 20 to 30 °C	± 0.62 dB (± 0.20 dB 95%)	± 0.88 dB (± 0.23 dB 95%)	± 1.05 dB (± 0.31 dB 95%)	± 1.53 dB (± 0.64 dB 95%)
4.36 MHz offset (RBW = 10 kHz)				
Dynamic range, relative	94.2 dB (99.5 dB typ)	88.1 dB (94.4 dB typ)	82.8 dB (89.9 dB typ)	80.4 dB (87.7 dB typ)
Sensitivity, absolute	-110.5 dB (-114.5 dBm typ)	-106.5 dB (-111.5 dBm typ)	-101.5 dB (-107.5 dBm typ)	-98.5 dB (-104.5 dBm typ)
Accuracy				
Relative	± 0.01 dB	± 0.18 dB	± 0.18 dB	± 0.29 dB
Absolute	± 0.62 dB (± 0.20 dB 95%)	± 0.88 dB (± 0.23 dB 95%)	± 1.05 dB (± 0.31 dB 95%)	± 1.53 dB (± 0.64 dB 95%)
ISDB-T modulation accuracy	Segments = 13, mode 3, GI = 1/8, partial reception = off, layer A-C segment = 13, code rate = 3/4, time interleaving I = 2, modulation = 64QAM ML ¹ = -20 dBm, 20 to 30 °C			
EVM				
Operating range	0 to 8%	0 to 8%	0 to 8%	0 to 8%
Floor	0.36% (EQ OFF)	0.66% (EQ OFF)	0.80% (EQ OFF)	0.99% (EQ Off)
Accuracy				
from 0.40/0.66/0.80% (PXA/MXA/EXA) to 1.2%	± 0.20%	± 0.30%	± 0.40%	
from 1.2 to 2.0%	± 0.20%	± 0.20%	± 0.30%	
from 2.0 to 8.0%	± 0.70%	± 0.70%	± 0.70%	
MER				
Operating range	≥ 22 dB	≥ 22 dB	≥ 22 dB	≥ 22 dB
Floor	49 dB (EQ Off)	44 dB (EQ Off)	42 dB (EQ Off)	40.1 dB (EQ Off)
Accuracy				
from 38 to 48 dB (PXA/MXA/EXA)	± 2.54 dB	± 2.68 dB	± 3.00 dB	
from 34 to 38 dB	± 0.67 dB	± 1.16 dB	± 1.52 dB	
from 22 to 34 dB	± 0.61 dB	± 0.73 dB	± 0.85 dB	
Frequency error ²				
Range	-100 to 100 kHz	-100 to 100 kHz	-100 to 100 kHz	-100 to 100 kHz
Accuracy	± 10 Hz + tfa3	± 10 Hz + tfa3	± 10 Hz + tfa3	± 10 Hz + tfa3
Quad error				
Range	-5 to 5 deg	-5 to 5 deg	-5 to 5 deg	-5 to 5 deg
Amplitude imbalance				
Range	-1 to 1 dB	-1 to 1 dB	-1 to 1 dB	-1 to 1 dB
Channel impulse response (SFN echo pattern)	(a) Selectable center and time/div (b) Scale type by time or distance (c) Results sorted by amplitude or time/distance (d) Default echo search limit -35 dB and adjustable (e) Adjustable FFT start position (0/8 to 8/8 GI), and MER metric displayed on the top of the view can be used as the criteria to tune the FFT window (f) Support pre-echo, post-echo, 0-dB echo, and out-of-GI echo scenarios			

1. ML (mixer level) is RF input power minus attenuation

2. The accuracy specification applies at the EVM = 1%

3. tfa = transmitter frequency $\times$ frequency reference accuracy

Description	PXA	MXA	EXA	CXA
ISDB-Tmm mod accuracy	For ISDB-Tmm, Segments = 33, Mode 3, GI = 1/4, Super Segment #0 ISDB-T, Super Segment #1 six one-Segment, Super Segment #2 ISDB-T, ML ¹ = -23 dBm, 20 to 30 °C, CF ≤ 1 GHz			
EVM	EQ Off	EQ Off	EQ Off	EQ Off
Operating range	0 to 25%	0 to 25%	0 to 25%	0 to 25%
Floor	0.32%	0.51%	0.68%	0.99%
MER	EQ Off	EQ Off	EQ Off	EQ Off
Operating range	≥12 dB	≥12 dB	≥12 dB	≥12 dB
Floor	50 dB	46 dB	44 dB	40.1 dB
Frequency error ²				
Range	-170 kHz to 170 kHz	-170 kHz to 170 kHz	-170 kHz to 170 kHz	-170 kHz to 170 kHz
Accuracy	± 1 Hz + tfa ³	± 10 Hz + tfa ³	± 10 Hz + tfa ³	± 10 Hz + tfa ³
Clock error ²				
Accuracy	-100 Hz to 100 Hz	-100 Hz to 100 Hz	-100 Hz to 100 Hz	-100 Hz to 100 Hz
Range	± 1 Hz + tfa ³	± 1 Hz + tfa ³	± 1 Hz + tfa ³	± 1 Hz + tfa ³
Quad error				
Range	-5 to 5 deg	-5 to 5 deg	-5 to 5 deg	-5 to 5 deg
Amplitude imbalance				
Range	-1 to 1 dB	-1 to 1 dB	-1 to 1 dB	-1 to 1 dB (nom)
Channel impulse response (SFN echo pattern)	Same as ISDB-T channel impulse response			

1. ML (mixer level) is RF input power minus attenuation
2. The accuracy specification applies at the EVM = 1%
3. tfa = transmitter frequency × frequency reference accuracy

For a complete list of specifications refer to the appropriate specifications guide.

PXA: www.keysight.com/find/pxa_specifications
 MXA: www.keysight.com/find/mxa_specifications
 EXA: www.keysight.com/find/exa_specifications
 CXA: www.keysight.com/find/cxa_specifications

Ordering Information

Software licensing and configuration

Choose from two license types:

- **Fixed, perpetual license:**
This allows you to run the application in the X-Series analyzer in which it is initially installed.
- **Transportable, perpetual license:**
This allows you to run the application in the X-Series analyzer in which it is initially installed, plus it may be transferred from one X-Series analyzer to another.

Try Before You Buy!

Free 30-day trials of X-Series measurement applications provide unrestricted use of each application's features and functionality on your X-Series analyzer. Redeem a trial license online today:

www.keysight.com/find/X-Series_trial

The table below contains information on our fixed, perpetual licenses.
For more information, please visit the product web pages.

N6155A & W6155A ISDB-T/Tmm X-Series measurement application

Description	Model-Option		Additional information
	PXA, MXA, EXA	CXA	
ISDB-T	N6155A-2FP	W6155A-2FP	
ISDB-T/Tmm	N6155A-3FP	W6155A-3FP	

Hardware Configurations

N9030A PXA signal analyzer

Description	Model-Option	Additional information
3.6, 8.4, 13.6, 26.5, 43, 44 or 50 GHz frequency range	N9030A-503, -508, -513, -526, -543, -544, or -550	One required
Analog baseband IQ (BBIQ) inputs	N9030A-BBA	Required for analog baseband measurement
Precision frequency reference	N9030A-PFR	Recommended
Electronic attenuator, 3.6 GHz	N9030A-EA3	Recommended
Preamplifier, 3.6, 8.4, 13.6, 26.5, 42.98, 44, or 50 GHz	N9030A-P03, -P08, -P13, -P26, -P43, -544, or -550	One recommended
Analysis bandwidth to 25, 40, or 160 MHz	N9030A-B25, -B40, or -B1X	One required for ISDB-Tmm
Wideband IF output	N9030A-CR3	Optional
Programmable IF output	N9030A-CRP	Optional

N9020A MXA signal analyzer

Description	Model-Option	Additional information
3.6, 8.4, 13.6, or 26.5 GHz frequency range	N9020A-503, -508, -513, or -526	One required
Analog baseband IQ (BBIQ) inputs	N9020A-BBA	Required for analog baseband measurement
Precision frequency reference	N9020A-PFR	Recommended
Electronic attenuator, 3.6 GHz	N9020A-EA3	Recommended
Preamplifier, 3.6, 8.4, 13.6, or 26.5 GHz	N9020A-P03, -P08, -P13, or -P26	One recommended
Analysis bandwidth to 25 or 40 MHz	N9020A-B25, -B40	One required for ISDB-Tmm
Wideband IF output	N9020A-CR3	Optional
Programmable IF output	N9020A-CRP	Optional

N9010A EXA signal analyzer

Description	Model-Option	Additional information
3.6, 7.0, 13.6, or 26.5 GHz frequency range	N9010A-503, -507, -513, or -526	One required
Precision frequency reference	N9010A-PFR	Recommended
Electronic attenuator, 3.6 GHz	N9010A-EA3	Recommended
Preamplifier, 3.6 or 7.0 GHz	N9010A-P03 or -P07	One recommended
Analysis bandwidth to 25 or 40 MHz	N9010A-B25, -B40	One required for ISDB-Tmm
Wideband IF output	N9010A-CR3	Optional
Programmable IF output	N9010A-CRP	Optional

N9000A CXA signal analyzer

Description	Model-Option	Additional information
3.0, 7.5, 13.6, or 26.5 GHz frequency range	N9000A-503, -507, -513, or -526	One required
Precision frequency reference	N9000A-PFR	Recommended
Analysis bandwidth to 25 MHz	N9000A-B25	Required for ISDB-Tmm
Tracking generator, 9 kHz to 3 GHz or 6 GHz	N9000A-T03 or T06	One optional
Fine step attenuator	N9000A-FSA	Recommended
Preamplifier, 3.0, 7.5, 13.6, or 26.5 GHz	N9000A-P03, -P07, -P13, or -P26	One recommended
Analysis bandwidth to 25 MHz	N9000A-B25	Optional
Wideband IF output	N9000A-CR3	Optional

Related Literature

N6155A and W6155A ISDB-T Measurement Application, Demonstration Guide, literature number 5990-5932EN

N6155A & W6155A ISDB-T Measurement Application, Measurement Guide, Part number N6155-90002

N6155A & W6155A ISDB-T Measurement Application, User's and Programmer's Reference, Part number N6155-90001

Web

Product page:

www.keysight.com/find/N6155A

www.keysight.com/find/W6155A

X-Series measurement applications:

www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:

www.keysight.com/find/X-Series

Application pages:

www.keysight.com/find/digitalvideo



Digital video solution table:

www.keysight.com/find/digitalvideo_solution

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES
Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.
© Keysight Technologies, 2017
Published in USA, December 1, 2017
5990-4374EN
www.keysight.com