


Keysight Technologies

Noise Figure

X-Series Measurement Application

N9069A & W9069A

Technical Overview

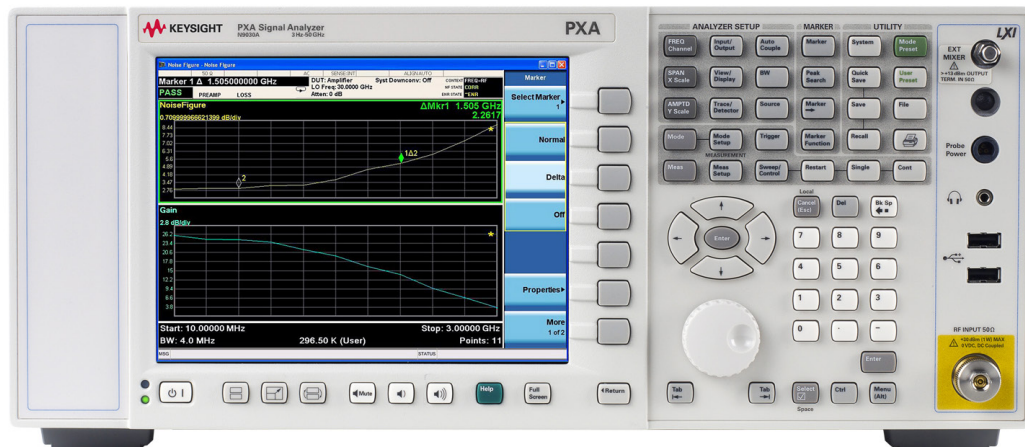

- Characterize noise figure and gain of connectorized devices and system blocks with graphic, meter, and table views
- User-definable sweep time and noise source settling time
- Fully-specified measurements with optional internal preamp; improved specifications with external USB preamp
- 50 GHz internal uncertainty calculator
- Noise figure measurements to 110 GHz (Option 526 or greater required) with Keysight Technologies, Inc. K-Series block downconverters
- Move application between X-Series signal analyzers with transportable licensing

Noise Figure Measurement Application

Noise figure is one of the fundamental parameters that differentiates one system, amplifier, or transistor from another. To minimize the problems resulting from noise generated in receiver systems, engineers can either make a weak signal stronger, or reduce the noise of that system or its individual components. Keysight's N/W9069A noise figure measurement application offers development engineers a simple tool to make accurate and repeatable noise figure measurements. Pair this measurement application with an Keysight X-Series signal analyzer for fully specified results up to 26.5 GHz on the CXA, CXA-m MXA and MXE, up to 44 GHz on the EXA, and up to 50 GHz on the PXA. The speed of this application also allows manufacturing engineers to rapidly measure any one of the following in their test racks:

- Noise figure/factor
- Gain
- Effective temperature
- Y-factor
- Hot/cold power density

The noise figure application utilizes the Y-factor method for calculating noise figure. By using a noise source, X-Series signal analyzers or the MXE EMI receiver can quickly determine the noise of the device under test. This method is very simple, as it utilizes a ratio of two noise power levels: one measured with the noise source ON and the other with the noise source OFF.

The U7227A/C/F USB preamps are available to reduce the uncertainty of Y-factor noise figure measurements to 44 GHz. With these preamps and an X-Series signal analyzer, you can obtain better noise figure measurements than with a dedicated noise figure analyzer such as the N8973/ 4/5A.

When using this application on an X-Series signal analyzer or MXE EMI receiver, engineers will also benefit from full RF signal analysis capabilities in one instrument. In addition, the noise figure measurement application is code-compatible with previous Keysight noise figure solutions where hardware and measurements are the same. The application can be configured for remote programming via USB, LAN, or GPIB—all of which are standard for X-Series.



Key Specifications

Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence. These values are not covered by the product warranty.
- Typical values are designated with the abbreviation "typ." These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation "nom." These values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Analyzer noise figure is computed from the specified DANL. See specifications on following pages for further explanation.

Noise figure for the combination of USB preamp and analyzer is

$$NF_{sys} = 10 * \text{Log} (F_{preamp} + (F_{analyzer} - 1)/G_{preamp})$$

The noise figure and gain of the preamp are specified and warranted.

Analyzer VSWR is characterized to the 95th percentile but not measured and warranted. USB preamp VSWR is measured and warranted and becomes the input VSWR of the measurement system when used.

Instrument uncertainty is defined for gain measurements as uncertainty due to relative amplitude uncertainties encountered in the analyzer when making the measurements required for the gain computation.

The noise figure measurement application is not specified for use below 10 MHz. Instrument uncertainty will nominally be the same as the 10 MHz to 3.6 GHz specifications; however, performance is not warranted. Instrument uncertainty for gain is characterized to the 95th percentile above 3.6 GHz.

These notes apply to the following specifications. For more information on configuring an X-Series signal analyzer for noise figure measurements, depending on the DUT noise figure gain, see the Noise Figure Measurement Guide, literature number N9069-90006.

Performance specifications

PXA with U7227A preamplifier		Specifications			
Frequency		PXA full range	PXA + U7227A full range		
VSWR ¹					
Frequency					
10 to 100 MHz		1.45	3.57		
0.1 to 2 GHz		1.45	1.54		
2 to 3 GHz		1.45	1.73		
3 to 3.6 GHz		1.45	1.93		
3.5 to 4 GHz		1.54	1.93		
4 to 8.4 GHz		1.54	—		
8.3 to 13.6 GHz		1.57	—		
13.5 to 17.1 GHz		1.48	—		
17.0 to 26.5 GHz		1.54	—		
		Internal preamp on	Internal preamp off + U7227A	Internal preamp on + U7227A	Supplemental information
Noise figure ^{2,3}					
10 to 100 MHz		12.25	9.46	5.96	
0.1 to 2.1 GHz		12.25	9.49	5.45	
2.1 to 3.6 GHz		14.25	11.35	5.56	
3.5 to 4 GHz		14.25	13.73	5.63	
4 to 6 GHz		14.25	—	—	
6 to 8.4 GHz		14.25	—	—	
8.3 to 13.6 GHz		15.25	—	—	
13.5 to 17.1 GHz		17.25	—	—	
16.9 to 18 GHz		19.25	—	—	
18 to 20 GHz		19.25	—	—	
20 to 26.5 GHz		23.25	—	—	
Noise source ENR					
Measurement range					
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB	Using internal preamp and RBW ≤ 4 MHz
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB	
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB	
Jitter					
		± 0.15 dB	± 0.15 dB	± 0.15 dB	
Instrument uncertainty for gain ^{4,5}					
10 MHz to 3.6 GHz		± 0.13 dB	± 0.13 dB	± 0.13 dB	DUT gain range = –20 to +40 dB
> 3.6 GHz		± 0.13 dB	± 0.13 dB	± 0.13 dB	

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

PXA with U7227C preamplifier		Specifications		
Frequency		PXA full range	PXA + U7227C full range	
VSWR ¹				
Frequency				
10 to 100 MHz		1.45	—	
0.1 to 3.6 GHz		1.45	1.43	
3.5 to 4 GHz		1.54	1.43	
4 to 8.4 GHz		1.54	2.32	
8.3 to 13.6 GHz		1.57	2.32	
13.5 to 17.1 GHz		1.48	2.32	
17.0 to 26.5 GHz		1.54	2.32	
		Internal preamp on	Internal preamp off + U7227C	Internal preamp on + U7227C
		Supplemental information		
Noise figure ^{2,3}				
10 to 100 MHz		12.25	—	—
0.1 to 2.1 GHz		12.25	9.88	6.36
2.1 to 3.6 GHz		14.25	11.60	6.52
3.5 to 4 GHz		14.25	13.88	6.51
4 to 6 GHz		14.25	13.28	6.56
6 to 8.4 GHz		14.25	12.61	4.61
8.3 to 13.6 GHz		15.25	10.66	4.57
13.5 to 16.9 GHz		17.25	13.30	4.74
16.9 to 18 GHz		19.25	15.77	5.06
18 to 20 GHz		19.25	15.37	5.77
20 to 26.5 GHz		23.25	18.46	6.25
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4,5}				
10 MHz to 3.6 GHz		± 0.13 dB	± 0.13 dB	± 0.13 dB
> 3.6 GHz		± 0.13 dB	± 0.13 dB	± 0.13 dB

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

PXA with U7227F preamplifier		Specifications		
Frequency		PXA full range	PXA + U7227F full range	
VSWR ¹				
Frequency				
0.01 to 2 GHz		1.39	—	
2 to 3.6 GHz		1.39	2.32	
3.5 to 8.4 GHz		1.50	2.32	
8.3 to 13.6 GHz		1.31	2.32	
13.5 to 17.1 GHz		1.33	2.32	
17.0 to 26.5 GHz		1.34	2.32	
26.4 to 34.5 GHz		1.41	2.32	
34.4 to 40 GHz		1.42	2.32	
40 to 44 GHz		1.42	3.00	
44 to 50 GHz		1.42	3.57	
		Internal preamp on	Internal preamp off + U7227F	Internal preamp on + U7227F
				Supplemental information
Noise figure ^{2,3}				
10 to 100 MHz		13.25	—	—
2 to 2.1 GHz		13.25	11.85	10.17
2.1 to 3.6 GHz		14.25	12.97	10.20
3.5 to 4 GHz		17.25	18.49	10.39
4 to 8.4 GHz		17.25	16.48	8.49
8.3 to 13.6 GHz		17.25	13.19	8.37
13.5 to 17.1 GHz		17.25	15.64	8.31
17 to 20 GHz		19.25	16.77	8.42
20 to 26.5 GHz		20.25	17.21	8.38
26.4 to 30 GHz		21.25	14.85	8.40
30 to 34 GHz		23.25	14.92	8.50
33 to 37 GHz		26.25	18.63	8.83
37 to 40 GHz		29.25	18.01	9.33
40 to 43 GHz		31.25	18.39	10.42
43 to 44 GHz		31.25	18.19	10.35
44 to 46 GHz		31.25	17.93	11.01
46 to 50 GHz		34.25	19.74	11.35
Due to U7227F temperature instability, noise figure measurements are not traceable above 44 GHz with the preamp attached.				
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4,5}				
10 MHz to 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
> 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
DUT gain range = -20 to +40 dB				

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

MXA with U7227A preamplifier		Specifications		
Frequency		MXA full range	MXA + U7227A full range	
VSWR ¹				
Frequency				
10 to 100 MHz		1.52	3.57	
0.1 to 2 GHz		1.52	1.43	
2 to 3 GHz		1.52	1.73	
3 to 3.6 GHz		1.52	1.93	
3.5 to 4 GHz		1.68	1.93	
4 to 8.4 GHz		1.68	—	
8.3 to 13.6 GHz		1.69	—	
13.5 to 17.1 GHz		1.66	—	
17.0 to 26.5 GHz		1.66	—	
		Internal preamp on	Internal preamp off + U7227A	Internal preamp on + U7227A
		Supplemental information		
Noise figure ^{2, 3}				
10 to 100 MHz		15.25	12.27	6.40
0.1 to 2.1 GHz		15.25	10.59	5.65
2.1 to 3.6 GHz		16.25	11.54	5.69
3.5 to 4 GHz		16.25	11.38	5.66
4 to 6 GHz		16.25	—	—
6 to 8.4 GHz		16.25	—	—
8.3 to 13.6 GHz		16.25	—	—
13.5 to 17.1 GHz		19.25	—	—
17 to 18 GHz		22.25	—	—
18 to 20 GHz		22.25	—	—
20 to 26.5 GHz		27.25	—	—
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4, 5}				
10 MHz to 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
> 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

MXA with U7227C preamplifier		Specifications		
Frequency		MXA full range	MXA + U7227C full range	
VSWR ¹				
Frequency				
10 to 100 MHz		1.52	—	
0.1 to 3.6 GHz		1.52	1.43	
3.5 to 4 GHz		1.68	1.43	
4 to 8.4 GHz		1.68	2.32	
8.3 to 13.6 GHz		1.69	2.32	
13.5 to 17.1 GHz		1.66	2.32	
17.0 to 26.5 GHz		1.66	2.32	
		Internal preamp on	Internal preamp off + U7227C	Internal preamp on + U7227C
		Supplemental information		
Noise figure ^{2,3}				
10 to 100 MHz		15.25	—	—
0.1 to 2.1 GHz		15.25	11.89	6.71
2.1 to 3.6 GHz		16.25	13.14	6.81
3.5 to 4 GHz		16.25	13.06	6.79
4 to 6 GHz		16.25	12.45	5.87
6 to 8.4 GHz		16.25	11.76	4.95
8.3 to 13.6 GHz		16.25	11.47	4.71
13.5 to 17.1 GHz		19.25	15.06	5.11
17 to 18 GHz		22.25	15.77	5.92
18 to 20 GHz		22.25	15.37	6.43
20 to 26.5 GHz		27.25	21.36	7.65
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4,5}				
10 MHz to 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
> 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

EXA with U7227A preamplifier		Specifications		
Frequency		EXA full range	EXA + U7227A full range	
VSWR ¹				
Frequency				
10 to 100 MHz		1.52	3.57	
0.1 to 2 GHz		1.52	1.54	
2 to 3 GHz		1.52	1.73	
3 to 3.6 GHz		1.52	1.93	
3.5 to 4 GHz		1.68	1.93	
4 to 8.4 GHz		1.68	—	
8.3 to 13.6 GHz		1.69	—	
13.5 to 17.1 GHz		1.66	—	
17.0 to 26.5 GHz		1.66	—	
		Internal preamp on	Internal preamp off + U7227A	Internal preamp on + U7227A
		Supplemental information		
Noise figure ^{2,3}				
10 to 100 MHz		17.25	14.79	6.86
100 MHz to 2.1 GHz		17.25	12.95	6.00
2.1 to 3.6 GHz		18.25	13.17	6.05
3.5 to 4 GHz		18.25	13.00	6.01
4 to 6 GHz		18.25	—	—
7 to 13.6 GHz		19.25	—	—
13.5 to 17.1 GHz		21.25	—	—
17 to 18 GHz		25.25	—	—
18 to 20 GHz		25.25	—	—
20 to 26.5 GHz		29.25	—	—
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4,5}				
10 MHz to 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
> 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

EXA with U7227C preamplifier		Specifications		
Frequency		EXA full range	EXA + U7227C full range	
VSWR ¹				
Frequency				
10 to 100 MHz		1.52	—	
0.1 to 3.6 GHz		1.52	1.43	
3.5 to 4 GHz		1.68	1.43	
4 to 8.4 GHz		1.68	2.32	
8.3 to 13.6 GHz		1.69	2.32	
13.5 to 17.1 GHz		1.66	2.32	
17.0 to 26.5 GHz		1.66	2.32	
		Internal preamp on	Internal preamp off + U7227C	Internal preamp on + U7227C
Supplemental information				
Noise figure ^{2,3}				
10 to 100 MHz		17.25	—	—
100 MHz to 2.1 GHz		17.25	14.30	7.08
2.1 to 3.6 GHz		18.25	14.82	7.23
3.5 to 4 GHz		18.25	14.73	7.20
4 to 6 GHz		18.25	14.15	6.33
6 to 7 GHz		18.25	13.81	5.53
7 to 13.6 GHz		19.25	15.90	5.34
13.5 to 17.1 GHz		21.25	21.78	5.66
17 to 18 GHz		25.25	21.55	7.24
18 to 20 GHz		25.25	21.06	7.51
20 to 26.5 GHz		29.25	23.32	8.68
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4,5}				
10 MHz to 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
> 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

EXA with U7227F preamplifier		Specifications		
Frequency		EXA full range	EXA + U7227F full range	
VSWR ¹				
Frequency				
0.01 to 2 GHz		1.52	—	
2 to 3.6 GHz		1.52	2.32	
3.5 to 8.4 GHz		1.68	2.32	
8.3 to 13.6 GHz		1.69	2.32	
13.5 to 17.1 GHz		1.66	2.32	
17.0 to 26.5 GHz		1.66	2.32	
26.5 to 40 GHz		—	2.32	
40 to 44 GHz		—	3.00	
		Internal preamp on	Internal preamp off + U7227F	Internal preamp on + U7227F
Supplemental information				
Noise figure ^{2, 3}				
10 to 1.2 GHz		14.25	—	—
1.2 to 2.1 GHz		15.25	—	—
2 to 2.1 GHz		15.25	12.65	10.27
2.1 to 3.6 GHz		16.25	13.49	10.32
3.5 to 4 GHz		18.25	19.36	10.49
4 to 7 GHz		18.25	15.91	8.65
7 to 20 GHz		18.25	15.91	8.34
20 to 26.5 GHz		20.25	17.21	8.38
26.5 to 32 GHz		23.25	19.69	8.56
32 to 34 GHz		23.25	19.27	8.50
33.9 to 40 GHz		26.5	23.67	8.72
40 to 44 GHz		30.25	22.81	10.11
Noise source ENR				
Measurement range				
4 to 6.5 dB	0 to 20 dB	± 0.02 dB	± 0.02 dB	± 0.02 dB
12 to 17 dB	0 to 30 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
20 to 22 dB	0 to 35 dB	± 0.03 dB	± 0.03 dB	± 0.03 dB
Jitter				
		± 0.15 dB	± 0.15 dB	± 0.15 dB
Instrument uncertainty for gain ^{4, 5}				
10 MHz to 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB
> 3.6 GHz		± 0.19 dB	± 0.19 dB	± 0.19 dB

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

CXA with U7227A preamplifier		Specifications			
Frequency		CXA full range	CXA + U7227A full range		
VSWR ¹					
Frequency					
10 to 100 MHz		3.0	3.57		
0.1 to 2 GHz		3.0	1.54		
2 to 3 GHz		3.0	1.73		
3 to 4 GHz		3.0	1.93		
4 to 7.5 GHz		3.0	–		
7.5 to 26.5 GHz		2.5	–		
		Internal preamp on	Internal preamp off + U7227A	Internal preamp on + U7227A	Supplemental information
Noise figure ^{2,3}					
10 to 100 MHz		17.25	13.92	6.86	
0.1 to 1.5 GHz		17.25	16.80	6.06	
1.5 to 3 GHz		19.25	16.10	6.37	
3 to 4 GHz		19.25	15.64	6.24	
4 to 6 GHz		19.25	–	–	
6 to 7.5 GHz		22.25	–	–	
7.5 to 13.6 GHz		22.25	–	–	
13.6 to 18 GHz		24.25	–	–	
18 to 20 GHz		24.25	–	–	
20 to 24 GHz		27.25	–	–	
24 to 26.5 GHz		37.25	–	–	
Noise source ENR					
Measurement range					
4 to 6.5 dB	0 to 20 dB	± 0.05 dB	± 0.05 dB	± 0.05 dB	Using internal preamp and RBW ≤ 4 MHz
12 to 17 dB	0 to 30 dB	± 0.05 dB	± 0.05 dB	± 0.05 dB	
20 to 22 dB	0 to 35 dB	± 0.1 dB	± 0.1 dB	± 0.1 dB	
Jitter					
		± 0.15 dB	± 0.15 dB	± 0.15 dB	DUT gain range = –20 to +40 dB
Instrument uncertainty for gain ^{4,5}					
		± 0.20 dB	± 0.20 dB	± 0.20 dB	

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

CXA with U7227C preamplifier		Specifications			
Frequency		CXA full range	CXA + U7227C full range		
VSWR ¹					
Frequency					
10 to 100 MHz		3.0	—		
0.1 to 3 GHz		3.0	1.43		
3 to 4 GHz		3.0	1.43		
4 to 7.5 GHz		3.0	2.32		
7.5 to 26.5 GHz		2.5	2.32		
		Internal preamp on	Internal preamp off + U7227C	Internal preamp on + U7227C	Supplemental information
Noise figure ^{2, 3}					
10 to 100 MHz		17.25	—	—	
0.1 to 1.5 GHz		17.25	18.04	7.12	
1.5 to 3 GHz		19.25	17.67	7.55	
3 to 4 GHz		19.25	17.43	7.47	
4 to 6 GHz		19.25	16.88	6.62	
6 to 7.5 GHz		22.25	18.36	7.10	
7.5 to 13.6 GHz		22.25	18.76	6.36	
13.6 to 18 GHz		24.25	22.53	6.75	
18 to 20 GHz		24.25	22.04	7.10	
20 to 24 GHz		27.25	22.98	7.96	
24 to 26.5 GHz		37.25	32.27	14.75	
Noise source ENR					
Measurement range					
4 to 6.5 dB	0 to 20 dB	± 0.05 dB	± 0.05 dB	± 0.05 dB	Using internal preamp and RBW ≤ 4 MHz
12 to 17 dB	0 to 30 dB	± 0.05 dB	± 0.05 dB	± 0.05 dB	
20 to 22 dB	0 to 35 dB	± 0.1 dB	± 0.1 dB	± 0.1 dB	
Jitter					
		± 0.15 dB	± 0.15 dB	± 0.15 dB	DUT gain range = -20 to +40 dB
Instrument uncertainty for gain ^{4, 5}					
		± 0.20 dB	± 0.20 dB	± 0.20 dB	

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

CXA-m		Specifications	
Frequency		CXA-m full range	
VSWR ¹			
Frequency			
10 MHz to 13.6 GHz		2.2	
13.6 to 26.5 GHz		2.5	
		Internal preamp on	Supplemental information
Noise figure ^{2, 3}			
10 MHz to 4.5 GHz		17.25	
4.5 to 9.5 GHz		20.25	
9.5 to 13 GHz		21.25	
13 to 14.5 GHz		19.25	
14.5 to 19.3 GHz		24.25	
19.3 to 23 GHz		25.25	
23 to 24 GHz		27.25	
24 to 26.5 GHz		34.25	
Noise source ENR			
Measurement range			
4 to 6.5 dB	0 to 20 dB	± 0.05 dB	
12 to 17 dB	0 to 30 dB	± 0.05 dB	
20 to 22 dB	0 to 35 dB	± 0.1 dB	
Jitter			
		± 0.15 dB	DUT gain range = -20 to +40 dB
Instrument uncertainty for gain ^{4, 5}			
		± 0.17 dB	

Instrument uncertainty for noise figure, 10 MHz to 26.5 GHz⁶

[1] Analyzer VSWR is characterized to the 95th percentile but not measured and warranted. The VSWR measurement is made on the PNA-X which is traceable. The reverse isolation of the USB preamp is high enough that the system VSWR is insignificantly affected by the analyzer VSWR. So the system VSWR is the warranted VSWR of the USB preamp.

[2] Analyzer noise figure is computed from the specified DANL using $NF = D - (K - L + B)$, where D is the DANL (displayed average noise level), K is kTB (-173.98 dBm in a 1 Hz bandwidth at 290 K), L is 2.51 dB (the effect of log averaging used in DANL verifications), N is 0.24 dB (the ratio of the noise bandwidth of the RBW filter with which the DANL is specified to an ideal noise bandwidth), B is ten times the base-10 logarithm of the RBW (in hertz) in which the DANL is specified. B is 0 dB for the 1 Hz RBW. The actual NF will vary from the nominal due to frequency response errors. Frequency response errors help as often as they harm, so NF derived from the DANL is a very good approximation to the true NF. Any other uncertainties created by deriving the noise figure are small second-order uncertainties the GUM does not require.

[3] Noise figure for the combination of USB preamp and analyzer is

$$NF_{sys} = 10 * \text{Log} (F_{preamp} + (F_{analyzer} - 1)/G_{preamp})$$

The noise figure and gain of the preamp are specified and warranted. The noise figure of the analyzer is derived and discussed in [2]. The uncertainty due to the noise figure of the analyzer is smaller than [2].

[4] “Instrument Uncertainty” is defined for gain measurements as uncertainty due to relative amplitude uncertainties encountered in the analyzer when making the measurements required for the gain computation. See Keysight App Note 57-2, literature number 5952-3706E, for details on the use of this specification. Jitter (amplitude variations) will also affect the accuracy of results. The standard deviation of the measured result decreases by a factor of the square root of the Resolution Bandwidth used and by the square root of the number of averages. This application uses the 4 MHz Resolution Bandwidth as default since this is the widest bandwidth with uncompromised accuracy.

[5] Instrument uncertainty for gain is characterized to the 95th percentile above 3.6 GHz.

[6] “Instrument Uncertainty” is defined for noise figure analysis as uncertainty due to relative amplitude uncertainties encountered in the analyzer when making the measurements required for a noise figure computation. The relative amplitude uncertainty depends on, but is not identical to, the relative display scale fidelity, also known as incremental log fidelity. The uncertainty of the analyzer is multiplied within the computation by an amount that depends on the Y factor to give the total uncertainty of the noise figure or gain measurement. See Keysight App Note 57-2, literature number 5952-3706E, for details on the use of this specification.

Note: Data subject to change

Computing measurement uncertainty

Keysight provides several versions of a noise figure uncertainty calculator (NFUC). The spreadsheet version gives the user the most freedom to enter DUT information and instrument specifications to get an accurate noise figure uncertainty. The spreadsheet version of the NFUC can be found at: www.keysight.com/find/nfuc

Noise figure and VSWR of the measurement depend on the measurement configuration used and also the gain of the DUT.

For more information about measurement uncertainty, the Using the U7227-Series USB Preamps for Noise Figure Measurements user guide is available.

Instructions on calculating noise figure measurement uncertainty using the USB preamplifiers can be found in the U7227-Series user guide.

Ordering Information

Software licensing

– **Transportable, perpetual license:**

This allows you to run the application in the X-Series analyzer or controller in which it is initially installed, plus it may be transferred from one X-Series analyzer or controller to another.

The table below contains information on our fixed, perpetual licenses. For more information, please visit the product web pages.

N9069A & W9069A noise figure X-Series measurement application

Description	Model-Option		Additional information
	PXA, MXA, EXA, CXA-m	CXA	
Noise figure measurement application	N9069A-1FP	W9069A-1FP	Fixed perpetual license; provides noise figure, gain, Y factor, effective noise temperature, and hot and cold noise measurements of amplifiers and other non-frequency converting devices
Advanced features	N9069A-2FP (Requires 1FP)	W9069A-2FP (Requires 1FP)	Manual mode, external LO control, and measurement of frequency-converting devices, including multi-stage converters
Upgrade to noise figure measurement application	N9069A-AFP	W9069A-AFP	Adds meter display including a strip chart for fixed frequency measurements; fixed perpetual license

Try Before You Buy!

Free 30-day trials of X-Series measurement applications provide unrestricted use of each application's features and functionality on your X-Series analyzer. Redeem a trial license on-line today:

www.keysight.com/find/X-Series_trial

You Can Upgrade!

Options can be added after your initial purchase.

All of our X-Series application options are license-key upgradeable.



X-Series Measurement Application Updates

To update a previously purchased N9069A/W9069A measurement application to include the latest feature updates, you can purchase the N9069A-MEU or W9069A-MEU minor enhancement update.

For more information, visit:

www.keysight.com/find/N9069A-MEU for PXA, MXA, EXA

www.keysight.com/find/W9069A-MEU for CXA

N9030A PXA signal analyzer

Description	Model-Option	Additional information
3.6, 8.4, 13.6, 26.5, 43, 44, or 50 GHz frequency range	N9030A-503, -508, -513, -526, -543, -544, or -550	One required
Electronic attenuator, 3.6 GHz	N9030A-EA3	Recommended
Preamplifier, 3.6, 8.4, 13.6, 26.5, 43, 44, or 50 GHz	N9030A-P03, -P08, -P13, -P26, -P43, -P44, or -P50	One required to meet spec

N9020A MXA signal analyzer

Description	Model-Option	Additional information
3.6, 8.4, 13.6, or 26.5 GHz frequency range	N9020A-503, -508, -513, or -526	One required
Electronic attenuator, 3.6 GHz	N9020A-EA3	Recommended
Preamplifier, 3.0, 8.4, 13.6, 26.5 GHz	N9020A-P03, -P08, -P13, or -P26	One required to meet spec

N9010A EXA signal analyzer

Description	Model-Option	Additional information
3.6, 7.0, 13.6, 26.5, 32, or 44 GHz frequency range	N9010A-503, -507, -513, -526, -532, or -544	One required
Electronic attenuator, 3.6 GHz	N9010A-EA3	Recommended
Fine step attenuator	N9010A-FSA	Recommended
Preamplifier, 3.6, 7.0, 32, 44 GHz	N9010A-P03, -P07, -P32, or -P44	One required to meet spec

N9000A CXA signal analyzer

Description	Model-Option	Additional information
3.0, 7.5, 13.6, 26.5 GHz frequency range	N9000A-503, -507, -513, or -526	One required
Fine step attenuator	N9000A-FSA	One recommended
Preamplifier, 3.6, 7.5, 13.6, 26.5 GHz	N9000A-P03, -P07, -P13, or -P26	One required to meet spec

N9038A MXE EMI receiver

Description	Model-Option	Additional information
8.4 or 26.5 GHz frequency range	N9038A-508 or -526	One required

M9290A CXA-m PXIe signal analyzer

Description	Model-Option	Additional information
3.0, 7.5, 13.6, or 26.5 GHz frequency range	M9290A-F03, -F07, -F13 or -F26	One required
Fine step attenuator	M9290A-FSA	One recommended
Preamplifier, 3.0, 7.5, 13.6, 26.5 GHz	M9290A-P03, -P07, -P13, or -P26	One required to meet spec

Noise source offerings

346 Series noise sources work with the full range of Keysight noise figure solutions. They are categorized by frequency coverage as well as excess noise ratio (ENR). The SNS Series of noise sources, or smart noise sources, can be used in conjunction with the X-Series signal analyzers, NFA, and ESA spectrum analyzer. The SNS noise sources replicate the ENR output and frequency coverage of the 346 Series noise sources, however with the SNS Series, ENR data is stored in an EPROM and is automatically downloaded to the instrument, eliminating the need to manually enter the values into the calibration table at each cardinal frequency point. In addition, a thermistor is built into the sensor to continually update the analyzer with the correct temperature, delivering automatic temperature compensation/correction within the measurement's source.

The U7227A/C/F USB preamplifiers, used with an X-Series signal analyzer, reduce uncertainty of Y-factor noise figure measurements up to 44 GHz.

Noise source	Frequency range	ENR
346A	10 MHz to 18 GHz	5 to 7 dB
346B	10 MHz to 18 GHz	14 to 16 dB
346C	10 MHz to 26 GHz	12 to 17 dB
Q347B	33 GHz to 50 GHz	6 to 13 dB
R347B	26.5 GHz to 40 GHz	10 to 13 dB
N4000A	10 MHz to 18 GHz	4.6 to 6.5 dB
N4001A	10 MHz to 18 GHz	14 to 16 dB
N4002A	10 MHz to 26 GHz	12 to 17 dB

Note: If the DUT noise figure is beyond 30 dB, then the Keysight PNA-X Option 029 for noise figure measurements on a network analyzer may be more suitable than the Y-factor method.

USB preamplifiers

Specification	U7227A	U7227C	U7227F
Frequency	10 MHz to 4 GHz	100 MHz to 26.5 GHz	2 GHz to 50 GHz
Gain (dB)	10 to 100 MHz: > 16 100 MHz to 4 GHz: > $0.5F + 17$	100 MHz to 26.5 GHz: > $16.1 + 0.26F$	2 to 50 GHz: > $16.5 + 0.23F$
Input return loss (Input SWR)	10 to 100 MHz: > 5 dB (3.57) 100 MHz to 2 GHz: > 13.5 dB (1.54) 2 to 3 GHz: > 11.5 dB (1.73) 3 to 4 GHz: > 10 dB (1.93)	100 MHz to 4 GHz: > 15 dB (1.43) 4 to 26.5 GHz: > 8 dB (2.32)	2 GHz to 40 GHz: > 8 dB (2.32) 40 to 44 GHz: > 6 dB (3.00) 44 to 50 GHz: > 5 dB (3.57)
Output return loss (Output SWR)	10 MHz to 4 GHz: > 18 dB (1.29)	100 MHz to 4 GHz: > 18 dB (1.29) 4 to 26.5 GHz: > 11 dB (1.78)	2 GHz to 4 GHz: > 18 dB (1.29) 4 to 40 GHz: > 11 dB (1.78) 40 to 50 GHz: > 8 dB (2.32)
Noise figure	10 to 100 MHz: < 5.5 dB 10 MHz to 4 GHz: < 5 dB	100 MHz to 4 GHz: < 6 dB 4 to 6 GHz: < 5 dB 6 to 18 GHz: < 4 dB 18 to 26.5 GHz: < 5 dB	2 to 4 GHz: < 10 dB 4 to 40 GHz: < 8 dB 40 to 44 GHz: < 9 dB 44 to 50 GHz: < 10 dB
Plug and play USB connection	Yes	Yes	Yes
Optimized gain slope for better spectrum analysis	Yes	Yes	Yes
Automatic gain compensation	Yes	Yes	Yes
Automatic temperature compensation	Yes	Yes	Yes

Related Literature

Noise Figure Measurement Accuracy: The Y-Factor Method, Application Note 57-2, literature number 5952-3706E

N9069A & W9069A Noise Figure X-Series Measurement Application Self-Guided Demonstration, literature number 5990-9835EN

Keysight N4000A, N4001A, N4002A SNS Series Noise Sources 10 MHz to 26.5 GHz, Technical Overview, literature number 5988-0081EN

Web

Product pages:

www.keysight.com/find/N9069A

www.keysight.com/find/W9069A

X-Series measurement applications:

www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:

www.keysight.com/find/X-Series

www.keysight.com/find/pxa

www.keysight.com/find/mxa

www.keysight.com/find/exa

www.keysight.com/find/cxa

www.keysight.com/find/mxe

www.keysight.com/find/CXA-m



Application page:

www.keysight.com/find/nf

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.



For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-6-20-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2015

Quality Management System

This information is subject to change without notice.

© Keysight Technologies, 2013 - 2017

Published in USA, September 1, 2017

5992-6536EN

www.keysight.com

