


Keysight Technologies

Signal Studio for Real-time Fading

N7605B

Technical Overview

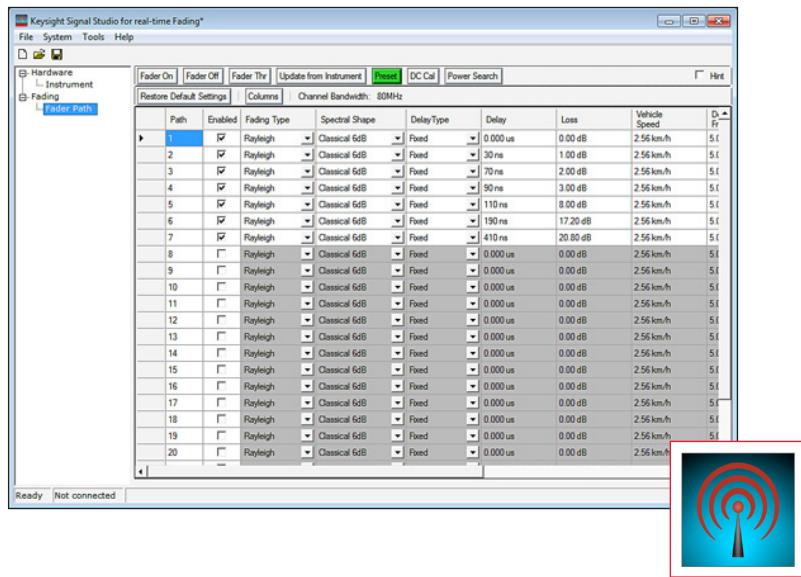

- Apply real-time fading on signals for receiver test and configure fading flexibly on all fading parameters
- Select from different fading types, including Rayleigh, Rician, Suzuki, log normal, pure Doppler, and constant phase to simulate different propagation environments
- Use preconfigured setups for all important digital communication standards: W-CDMA, HSDPA, HSUPA, COST 259, TD-SCDMA, cdma2000®, cdmaOne, 1xEV-DO, GSM, EDGE, WLAN, TETRA, DVB, LTE
- Add AWGN (Option 403 on N5172B EXG/N5182B MXG X-Series signal generators) with calibrated S/N to the signals
- Accelerate the signal creation process with a user interface based on parameterized signal configuration and tree-style navigation


Introduction

A fading channel emulator allows engineers to comprehensively evaluate wireless communication systems by predicting their performance in response to real-world conditions. The Keysight N7605B Signal Studio for real-time fading software together with an N5172B EXG/N5182B MXG vector signal generator provides a comprehensive diagnostic toolset for designing and verifying wireless signal processing devices. This solution applies real-time fading to a baseband signal in a single general-purpose signal generator.

Receiver test in dynamic environments for early R&D and performance verification

N7605B Signal Studio for real-time fading software is a powerful tool for verifying your cellular communications, WLAN, digital video/audio, or satellite/military communication receiver designs. Use this software to fade your digital baseband signals and apply AWGN, and to convert the faded and noisy signals to RF frequencies in the N5172B EXG/N5182B MXG vector signal generator. Preconfigured fading profiles simplify initial setup, or you can choose user-defined fading profiles to meet your specific test needs.

- Conformance test under fading conditions of receivers, during RF/baseband integration and system verification
- Verifications of the baseband subsystems, in the process of chip design and integrated circuit development.

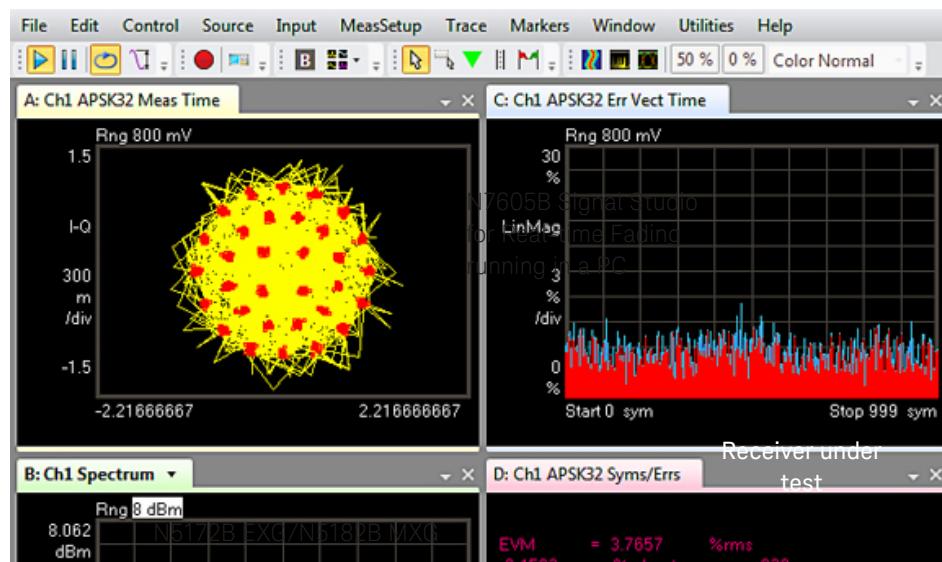


Top Features

Powerful support on different fading types

The ability to simulate different fading profiles is essential for evaluating receiver performance in a variety of environments. The N7605B can support the following fading types:


- Rayleigh – small-scale multipath scattering
- Rician – Rayleigh with a direct ray
- Log normal – large-scale free-space path loss
- Suzuki – Rayleigh with log normal
- Pure Doppler – frequency shift due to motion

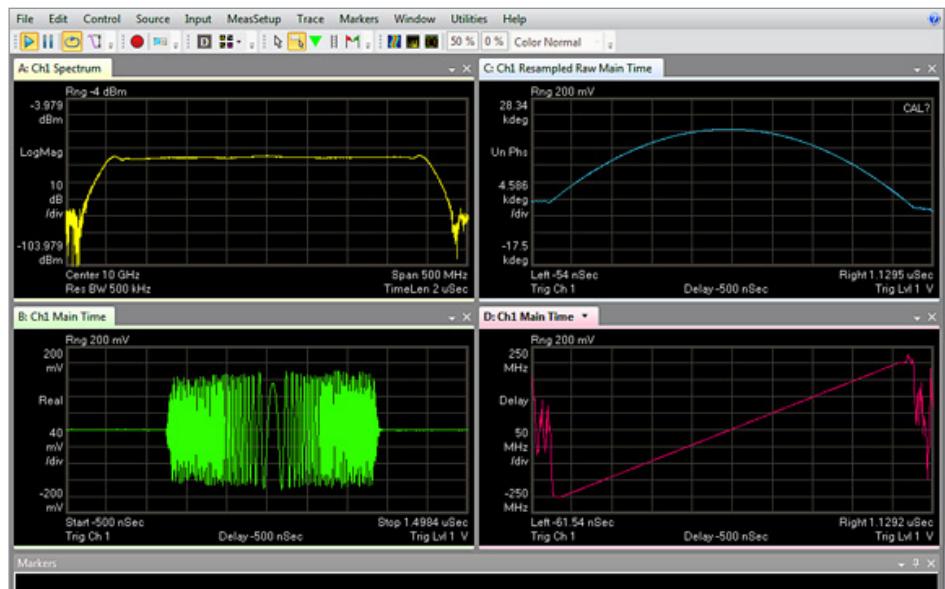

Flexible configuration on different Doppler spectrum shapes


Doppler spectrum shape is another important part to simulate different fading scenarios. The N7605B supports the following Doppler spectrum shapes, enabling you to simulate the environments required for the test.

- Classical 3 dB
- Classical 6 dB
- Flat
- Rounded
- Jakes Classical
- Jakes Rounded
- Half Bathtub
- Jakes Half Bathtub

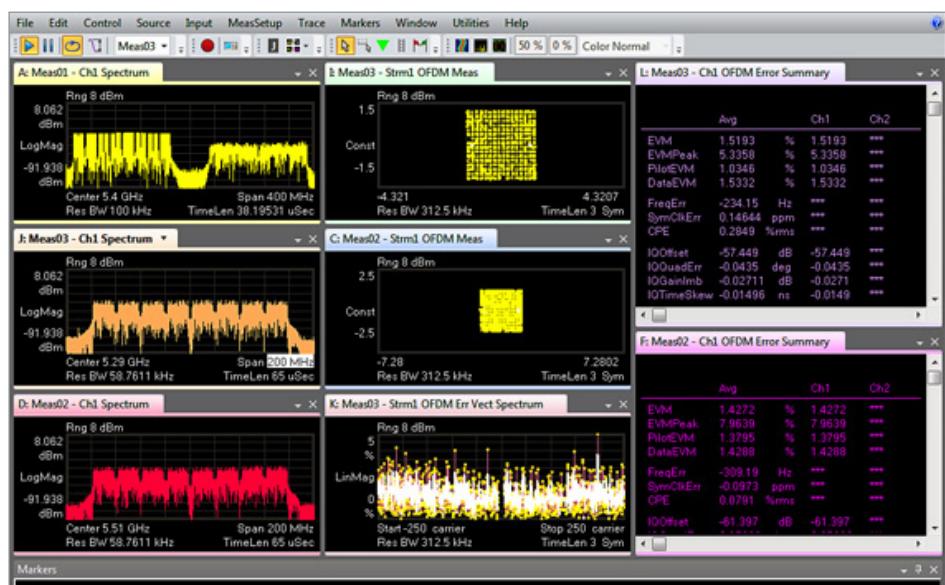


Predefined fading profile setups

Predefined setups for common wireless and digital video formats are included with the software to simplify test preparation. You can modify these standard profiles to provide custom configurations for simulating specific environments.

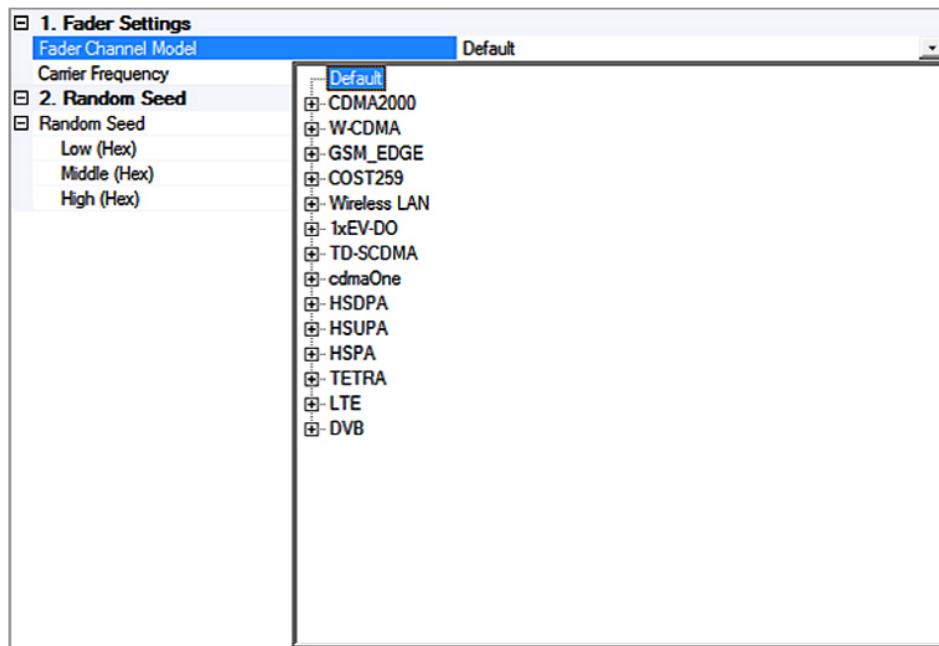

Add AWGN with ease and accuracy

Add noise on the faded signals easily on the N7605B. You can set the signal-to-noise ratio, carrier bandwidth, noise bandwidth and many other parameters on the user interface of the software.

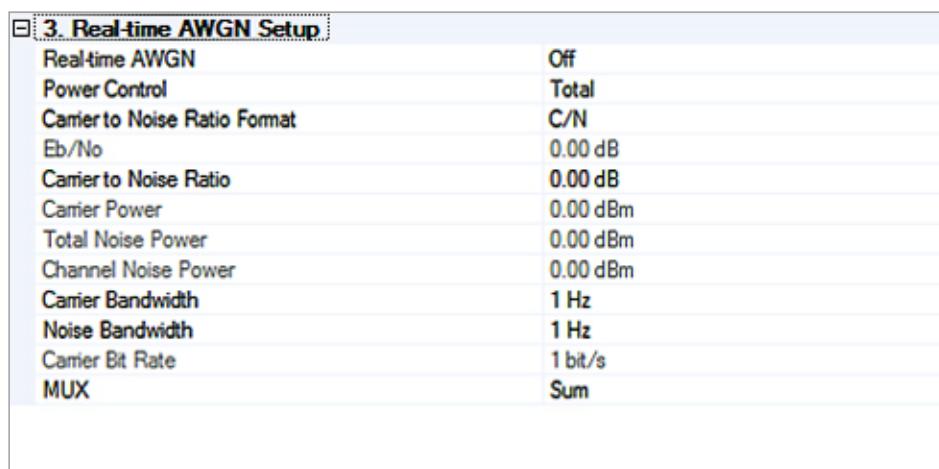

Key Specifications

Simulate real-world conditions to test multi-format receivers more quickly and validate design robustness earlier in the development cycle with the EXG/MXG signal generator.

Number of faders	1
Paths per fader	6 paths @ 160 MHz 12 paths @ 80 MHz 24 paths @ 40 MHz
Power accuracy	See N5182B MXG/N5172B EXG data sheet for performance details.
Predefined channel models	W-CDMA, HSDPA, HSUPA, COST 259, TD-SCDMA, cdma2000®, cdmaOne, 1xEV-DO, GSM, EDGE, WLAN, TETRA, 802.16 OFDM, 802.16 OFDMA, LTE (includes high speed train), MBRAI models for DVB-T and DVB-H
Random seed	89 bits
Fading types	Pure Doppler, Rayleigh, Rician, Suzuki, log normal
Spectral shape	Classical 3 dB, classical 6 dB, flat, rounded, Jakes classical, Jakes rounded, Gaussian, Half Bathtub, Jakes Half Bathtub
Rayleigh distribution	0.5 dB from –30 to + 10 dB of mean power level deviation from CDF, filtered noise
Rician	
Power ratio (k) range	–84 dB to 84 dB
LOS AoA	0 to 180°
Path delay	0 to 2.5 ms
Resolution	0.1 ns
Phase shift	0 to 360°
Resolution	0.01°
Path loss	0 to 84 dB
Resolution	0.01 dB
Vehicle speed ¹	0 to 864 km/h @ 2 GHz
Resolution	0.01 km/h
Doppler frequency ¹	0 Hz to 1.6 kHz
Resolution	0.001 Hz
Angle of arrival (AoA)	–360 to 360°
Resolution	0.01°
Angle of departure (AoD)	–360 to 360°
Resolution	0.01°
AoA Azimuth spread	0.01 to 180°
Resolution	0.01°
AoD Azimuth spread	0.01 to 180°
Resolution	0.01°
Log normal	
Standard deviation	0 to 12 dB
Decorrelation length	1 m to 1 km

1. Doppler frequency of vehicle speed is coupled to the carrier frequency setting.

Software Licensing and Configuration

Signal Studio offers flexible licensing options, including:

- **Fixed license:** Allows you to create unlimited I/Q waveforms with a specific Signal Studio product and use them with a single, specific platform.
- **Transportable/floating license:** Allows you to create unlimited I/Q waveforms with a specific Signal Studio product and use them with a single platform (or PC in some cases) at a time. You may transfer the license from one product to another.

The table below lists fixed, perpetual licenses only; additional license types may be available. For detailed licensing information, please refer to the Licensing Options web page at www.keysight.com/find/SignalStudio_licensing

N7605B signal studio for real-time fading

Model-Option	Description
Connectivity	
N7605B-3FP	Connect to N5182B/72B MXG/EXG signal generator
Capability	
N7605B-EFP	Basic real-time fading

For detailed configuration assistance, refer to the Signal Studio Configuration Assistant web page at:

http://rfmw.em.keysight.com/wireless/helpfiles/all-in-one_config_asst/ssconfig.html

Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.



Start with a 30-day free trial.
[www.keysight.com/find/
SignalStudio_trial](http://www.keysight.com/find/SignalStudio_trial)

Additional Information

Related literature

Refer to the following N5172B EXG and N5182B MXG data sheets for hardware specifications.

N5172B X-Series vector signal generator,
Data Sheet, 5991-0039EN

N5182B X-Series vector signal generator,
Data Sheet, 5991-0038EN


Web

Find additional product-related information at www.keysight.com/find/n7605b

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

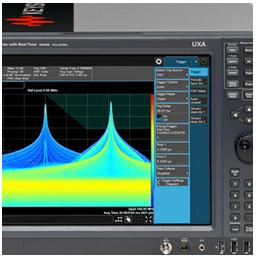

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000 is a US registered certification mark of the Telecommunications Industry Association.



Unlocking Measurement Insights

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified

ISO9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

This information is subject to change without notice.
© Keysight Technologies, 2015
Published in USA, December 1, 2017
5992-0853EN
www.keysight.com