


Keysight Technologies

GSM/EDGE/EVO

X-Series Measurement App, Traditional UI

N9071DEM0D

Technical Overview

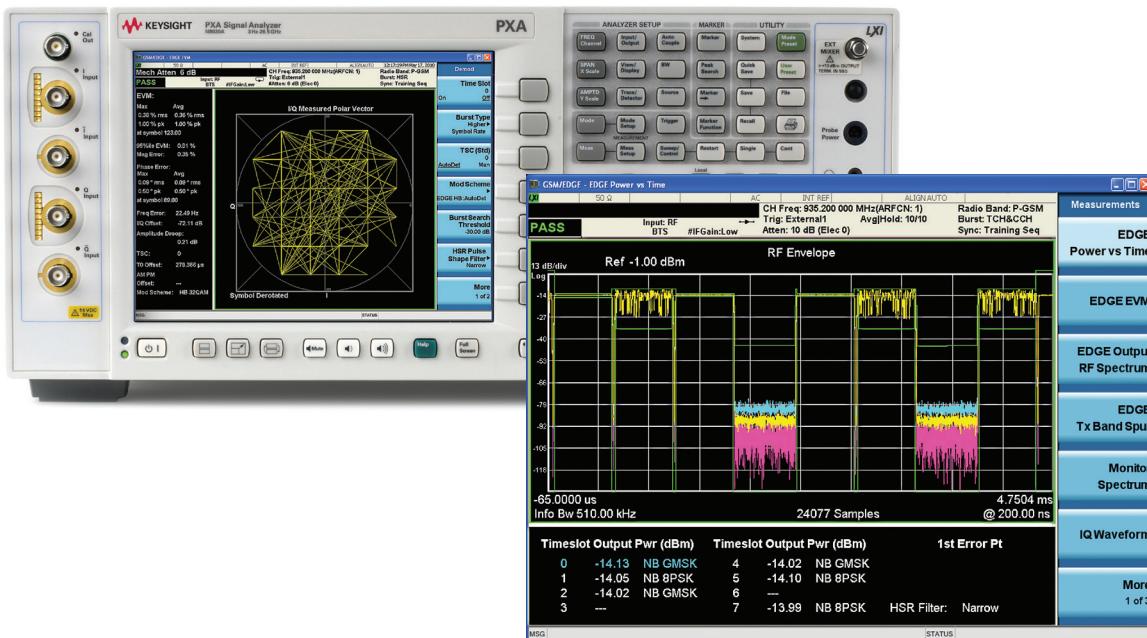

- Measure GSM, EDGE, and EDGE Evolution RF transmitter performance, including multi-carrier base transceiver stations (MC-BTS)
- Test voice services over adaptive multi-user channels on one slot (VAMOS) enabled transmitters
- Perform one-button transmitter tests with pass/fail limit per 3GPP standard
- Use hardkey/softkey manual user interface or SCPI remote user interface
- Leverage built-in, context-sensitive help
- Flexible licensing provides the option of using perpetual or time based licenses with one or multiple signal analyzers

GSM/EDGE/EVO Measurement Application

The GSM/EDGE/EVO measurement application transforms the X-Series signal analyzers into standards-based GSM, EDGE, and EDGE-Evolution transmitter testers by adding fast one-button RF conformance measurements to help you design, evaluate, and manufacture your GSM/EDGE devices. The measurement application is further enhanced to support multicarrier (MC) BTS and voice services over adaptive multi-user channels on one slot (VAMOS)—allowing you to stay on the leading edge of your design and manufacturing challenges.


X-Series measurement applications can help you:

- Gain more insight into device performance with intuitive display and graphs for your application. Select from our library of over 25 different measurement applications.
- Ensure that your design meets the latest standard. Updates are made to the X-Series measurement applications as standards evolve.
- Apply the same measurement science across multiple hardware platforms for consistent measurement results over your design cycle from R&D to production.
- Choose the license structure that meets your business needs. We provide a range of license types (node-locked, transportable, floating or USB portable) and license terms (perpetual or time-based).

Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.

- Electronic design automation (EDA) software
- Application software
- Programming environments
- Productivity software



Learn more at
www.keysight.com/find/software

Start with a 30-day free trial.
www.keysight.com/find/free_trials



Technology Overview

The global system for mobile communications (GSM) digital cellular standard is a time division multiple access (TDMA) channel access scheme that uses Gaussian minimum shift keying (GMSK) modulation. It uses 200 kHz RF channels, time division multiplexed, to enable up to eight users to access each carrier.

Enhanced data rates for GSM evolution (EDGE) technology is an upgrade to the GSM standard, providing higher data rates in the same frequency spectrum by using higher density modulation, $3\pi/8$ rotating 8PSK modulation. The rotation prevents symbol transitions through the origin, reducing the peak-to-average power ratio, thereby minimizing spectral re-growth and

improving power efficiency. The $3\pi/8$ rotating 8PSK is not a constant amplitude modulation; hence a standard Gaussian filter (non-linear) will distort the signal. Therefore, EDGE uses a special “linearized” version of the Gaussian filter from GSM resulting in a spectrum that is very similar to that of GSM, while minimizing non-linear distortion in the baseband signal.

EDGE Evolution or EGPRS2 is a technology to offer near-UMTS (universal mobile telecommunications system) level data throughput with more than double the spectrum efficiency. For a higher data rate, the EDGE Evolution signal configuration has normal burst (NB) and higher symbol rate (HSR) burst including new modulation formats such as

QPSK, 16QAM, and 32QAM. New pulse shaping filters are defined as narrow and wide filters for HSR. This is necessary to adjust the HSR spectrum with normal EDGE mask tests because GSM, EDGE, and EDGE Evolution will coexist in commercial services.

Now included in 3GPP Release 9 is voice services over adaptive multi-user channels on one slot (VAMOS). VAMOS can double the channel number assignment capacity of existing GSM networks by sending two sub channels on one slot. It utilizes adaptive QPSK (AQPSK), which is PSK with four state points whose positions are adjustable via a parameter Alpha.

Table 1. Key differences in GSM, EDGE, and EDGE Evolution standards

	GSM	EDGE	EDGE Evolution (EGPRS2)	
			Level A (EGPRS2-A)	Level B (EGPRS2-B)
Modulation	GMSK	$3\pi/8$ shift 8PSK	GMSK $3\pi/8$ shift 8PSK, $+\pi/4$ shift 16QAM, $-\pi/4$ shift 32QAM	$3\pi/8$ shift QPSK, $+\pi/4$ shift 16QAM, $-\pi/4$ shift 32QAM
Bits per symbol	1	3	1, 3, 4, 5	2, 4, 5
Payload per timeslot	114 bits (57+57)	348 bits (174+174)	114 bits (57+57) 348 bits (174+174) 464 bits (232+232) 580 bits (290+290)	276 bits (138+138) 552 bits (276+276) 690 bits (345+345)
Symbol rate	270.833 kbps	270.833 kbps	270.833 kbps	325 kbps
Amplitude modulation	No	Yes	Yes	Yes
Filter	Gaussian	Linearized Gaussian (EDGE)	Linearized Gaussian (EDGE)	Narrow or wide pulse shaping filter
BT	0.3	0.3	0.3	–

RF Transmitter Tests

With the X-Series signal analyzers and the GSM/EDGE/EVO measurement application, you can perform RF transmitter measurements on BTS and mobile devices in time, frequency, and modulation domains. Measure basic GSM and EDGE signals as well as

EDGE Evolution signals with Level A (normal burst) and Level B (high symbol rate) with all modulation formats and transmit filters. In addition, MC-BTS and VAMOS transmitter measurements according to Release 9 of the 3GPP standard is supported.

For mobile station (MS) high-speed manufacturing, a single acquisition combined GSM/EDGE measurement is available where the speed is up to 20 times faster than traditional one-button measurements (for details refer to Ordering Information).

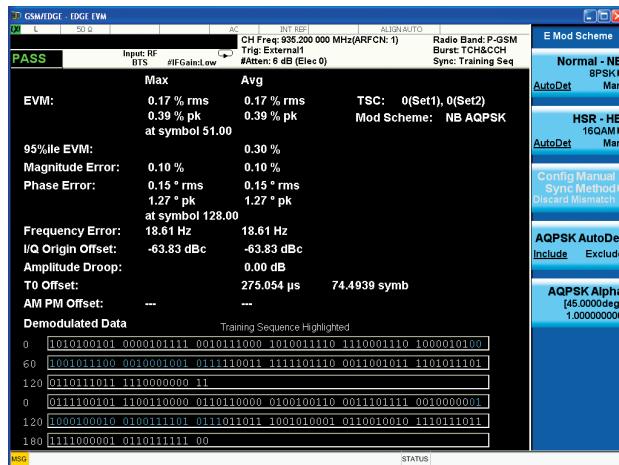


Figure 1. EVM and demodulated bits for VAMOS (AQPSK) modulation signals. Training sequences for both VAMOS sub channels are highlighted.

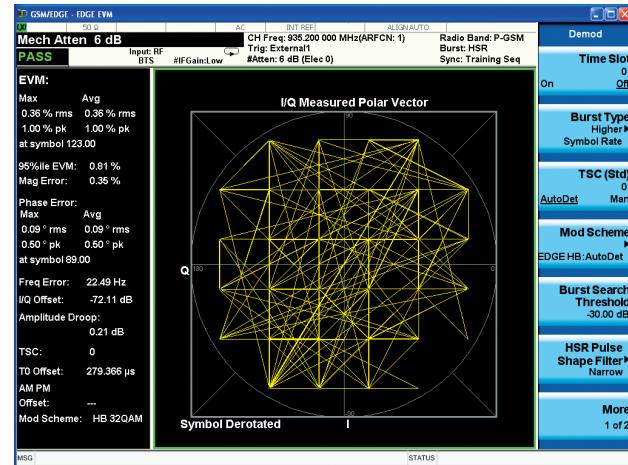


Figure 2. Constellation diagram and error summary of an HSR 32QAM EDGE Evolution signal.

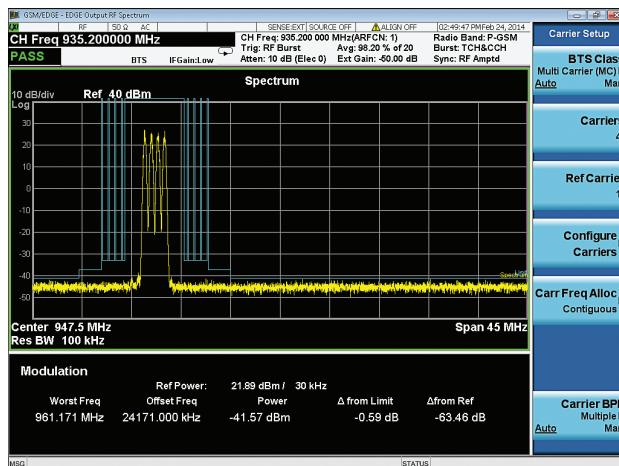


Figure 3. Multi-carrier BTS (MC-BTS) ORFS with limit mask for ORFS and up to 5th order intermodulation products. MC-BTS ORFS can also be configured for non-contiguous frequency allocation.



Figure 4. GSM list power step measurement for signal calibration using single acquisition combined measurement mode.

Standards-based RF transmitter test

The RF transmitter test requirements for GSM/EDGE/EDGE Evolution are defined in TS 45 and 51 series of the 3GPP standard. Table 2 shows the

required base station RF transmitter tests along with the corresponding measurement applications.

Table 2. Required BTS RF transmitter measurements and the corresponding measurements in N9071EM0D and 89600 VSA software

3GPP TS.51.021 subclause	Transmitter test	N9071EM0D X-Series measurement application	89600 VSA software Option AYA
6.2	Modulation accuracy	EVM	EVM
6.3	Mean transmitted RF carrier power	Transmit power	Can be performed using band power marker
6.4	Transmitted RF carrier power versus time	Power vs. time	
6.5.1	Spectrum due to modulation and wideband noise	Output RF spectrum (ORFS) due to modulation and wideband noise	
6.5.2	Switching transients spectrum	Output RF spectrum (ORFS) due to switching	
6.6.1	Conducted spurious emissions from the transmitter antenna connector, inside the BTS transmit band	Tx band spur	
6.6.2		Spectrum analyzer mode – Spurious emissions	
6.7	Intermodulation attenuation	Spectrum analyzer mode – Spurious emissions	
6.8	Intra base station system intermodulation attenuation	Spectrum analyzer mode – Spurious emissions	
6.9	Intra base station system intermodulation attenuation, MXM 850 and MXM 1900	Spectrum analyzer mode – Spurious emissions	89600 VSA offers modulation quality measurements. For one button, non-demodulation, measurements such as ORFS and PvT, use the N9071EM0D embedded application.
6.10	Intra base station system intermodulation attenuation, PCS 1900, GSM 850, GSM 700	Spectrum analyzer mode – Spurious emissions	
6.11	Intermodulation attenuation (GSM 700, GSM 850, MXM 850, PCS 1900, and MXM 1900)	Spectrum analyzer mode – Spurious emissions	
6.12	Wideband noise and intra-BSS intermodulation attenuation in multicarrier operation	MCBTS ORFS due to modulation and wideband noise. Available for both contiguous and non-contiguous frequency allocation.	

Top Features

All of the RF transmitter measurements as defined by the 3GPP standard, as well as a wide range of additional measurements and analysis tools, are available with a press of a button (Table 3). These measurements are fully remote

controllable via the IEC/IEEE bus or LAN, using SCPI commands.

Analog baseband measurements are available on the PXA or MXA signal analyzer equipped with BBIQ hardware. Supported baseband

measurements include all of the modulation quality plus I/Q waveform measurements.

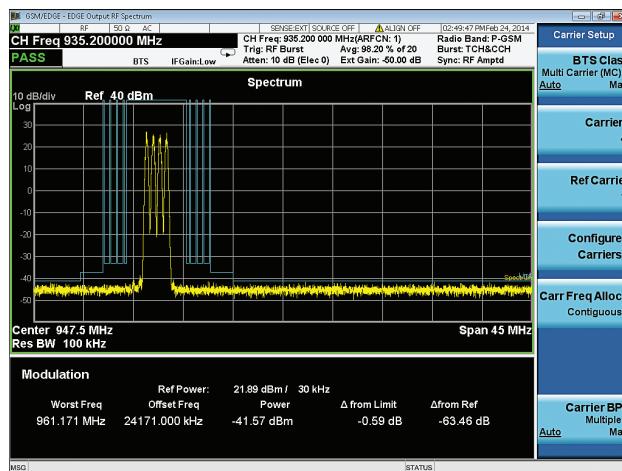


Figure 5. GSM signal view in power vs. time, real-time spectrum with frequency mask trigger and spectrogram display using RTSA option on the PXA or MXA signal analyzers.

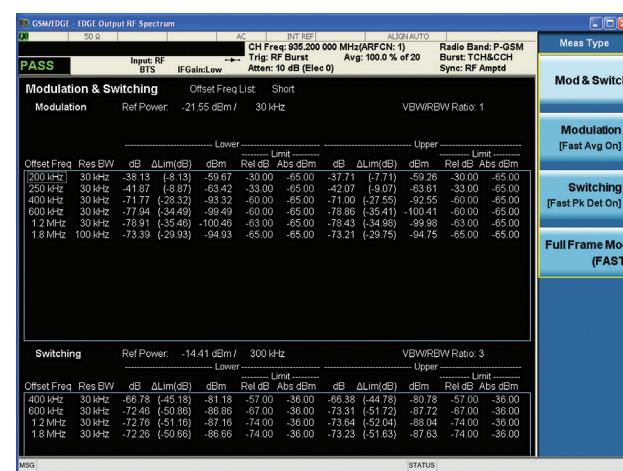


Figure 6. Combined view of ORFS due to modulation and switching transients.

Table 3. One-button measurements provided by the N9071DEM0D measurement application

Technology	GSM/ EDGE	EDGE Evolution Level A (EGPRS2-A) Level B (EGPRS2-B)	VAMOS (AQPSK)	Single Carrier BTS	MC BTS Single Carrier active	MC BTS Multicarrier active for contiguous and non- contiguous frequency allocation	MS
Measurements							
EVM	●	●	●	●	●	○	●
RMS EVM	●	●	●	●	●	○	●
Peak EVM	●	●	●	●	●	○	●
95% EVM	●	●	●	●	●	○	●
Frequency error	●	●	●	●	●	○	●
Phase error	●	●	●	●	●	○	●
Magnitude error	●	●	●	●	●	○	●
I/Q origin offset	●	●	●	●	●	○	●
TO offset	●	●	●	●	●	○	●
AM PM offset	●	●	●	●	●	○	●
Transmit power	●	●	●	●	●	○	●
Power vs. time	●	●	●	●	●	○	●
Output RF spectrum							
Due to modulation and wideband noise	●	●	●	●	●	●	●
Due to switching transients	●	●	●	●	●	●	●
In-band Tx band spur	●	●	●	●	(*)1	(*)2	n/a

Notes: ○ Supported, but focused on one carrier measurement at a time

(*)1 Use output RF spectrum in single carrier operation

(*)2 Use output RF spectrum in multicarrier operation

Single acquisition combined measurements

The N9071EMXD single acquisition combined GSM/EDGE measurement application is for high-speed manufacturing of GSM/EDGE mobile phone transmitters, wireless components, such as power amplifiers, and low-cost pico/femtocell base stations. Used with the MXA and EXA signal analyzers, it provides up to 20 times speed improvement compared to traditional one-button measurements for list power step, phase and frequency error (PFER), EDGE EVM, PvT, ORFS, marker measurements, and harmonics.

Single Acquisition

Contains one continuous block of captured data collected using predefined capture settings. The capture period can be defined by test engineers to suit the requirements for specific device tests, for example, the number of GSM bursts required to provide the engineer with enough data to ensure a good measurement on the DUT.

Combined Measurements

Implies that the measurement sequence performed by the analyzer can accommodate any mix of transmitter power measurements and modulation quality measurements performed on the data collected within the capture period.

Key Specifications

Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence. These values are not covered by the product warranty.
- Typical values are designated with the abbreviation "typ." These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation "nom." These values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Note: Data subject to change

Supported devices and standards

Device type	BTS, MS
Standard version	Mobile station: 3GPP TS 51.010-1 v.10.0.0 (2012-03) Base station: 3GPP TS51.021 v.10.7.0 (2012-11)
BTS type	Normal, Micro1, Micro2, Micro3, Pico
Radio band	P-GSM 900, E-GSM 900, R-GSM 900, DCS1800, PCS1900, GSM 850, T-GSM 810, GSM 700, GSM 480, GSM 450

For a complete list of specifications refer to the appropriate specifications guide.

Benchtop:

PXA: www.keysight.com/find/pxa_specifications

MXA: www.keysight.com/find/mxa_specifications

EXA: www.keysight.com/find/exa_specifications

CXA: www.keysight.com/find/cxa_specifications

PXIe:

VSA up to 6 GHz: www.keysight.com/find/m9391a

VSA up to 50GHz: www.keysight.com/find/m9393a

VXT: www.keysight.com/find/m9421a

CXA-m: www.keysight.com/find/cxa-m

Performance specifications

Description	PXA	MXA	EXA	CXA ¹
EDGE error vector magnitude (EVM)^{2,3}				
Carrier power range at RF input	+24 to -45 dBm (nom)			
EVM, rms				
Operating range	0 to 20% (nom)			
Floor	0.6 (0.4% nom)	0.6 (0.5% nom)	0.7 (0.5% nom)	0.7 (0.5% nom)
Floor (Baseband IQ Input)	0.5% (nom)	0.5% (nom)	n/a	n/a
Accuracy conditions:				
EVM range 1 to 10% (NSR 8 PSK);	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$
EVM range 1 to 6% (NSR 16QAM/32QAM);				
EVM range 1 to 8% (HSR QPSK);				
EVM range 1 to 5% (HSR 16QAM/32QAM)				
Frequency error				
Initial frequency error range	± 80 kHz (nom)			
Accuracy	± 5 Hz + tfa ⁴			

1. When the margin between this performance level and 3GPP requirements is not adequate, it may not test against the 3GPP test limits.

2. Specifications based on 200 bursts.

3. $3\pi/8$ shifted 8PSK, $3\pi/8$ shifted QPSK, $\pi/4$ shifted 16QAM, $-\pi/4$ shifted 32QAM modulation in NSR/HSR with pulse shaping filter

4. tfa = transmitter frequency x frequency reference accuracy

Description	PXA	MXA	EXA	CXA
IQ origin offset				
DUT maximum offset	-15 dBc (nom)	-15 dBc (nom)	-15 dBc (nom)	-15 dBc (nom)
Maximum analyzer noise floor	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)
Trigger to T0 time offset				
Relative accuracy	± 5.0 ns (nom)	± 5.0 ns (nom)	± 5.0 ns (nom)	± 5.0 ns (nom)
Phase and frequency error (GMSK modulation)¹				
Carrier power range at RF input	+27 to -45 dBm (nom)	+27 to -45 dBm (nom)	+27 to -45 dBm (nom)	+27 to -45 dBm (nom)
Phase error, rms				
Floor	0.5°	0.5°	0.6°	0.6°
Floor (baseband IQ input)	0.3° (nom)	0.3° (nom)	n/a	n/a
Accuracy				
Phase error range 1° to 6°	± 0.3°	± 0.3°	± 0.3°	± 0.3°
Frequency error				
Initial frequency error range	± 80 kHz (nom)	± 80 kHz (nom)	± 80 kHz (nom)	± 80 kHz (nom)
Accuracy	± 5 Hz + tfa ²	± 5 Hz + tfa ²	± 5 Hz + tfa ²	± 5 Hz + tfa ²
IQ origin offset				
DUT maximum offset	-15 dBc (nom)	-15 dBc (nom)	-15 dBc (nom)	-15 dBc (nom)
Analyzer noise floor	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)
Trigger to T0 time offset				
Relative accuracy	± 5.0 ns (nom)	± 5.0 ns (nom)	± 5.0 ns (nom)	± 5.0 ns (nom)
Power vs. time (GSM/EDGE/EDGE Evolution)				
Minimum carrier power at RF input	-35 dBm (nom)	-35 dBm (nom)	-35 dBm (nom)	-35 dBm (nom)
Absolute power accuracy for in-band signal (excluding mismatch error)	-0.11 ± 0.19 dB (95%)	-0.11 ± 0.23 dB (95%)	-0.11 ± 0.27 dB (95%)	-0.11 ± 0.60 dB (95%)
Power ramp relative accuracy (referenced to mean transmitted power)				
Accuracy	± 0.11 dB	± 0.11 dB	± 0.16 dB	± 0.31 dB
Measurement floor	-95 dBm	-92 dBm	-89 dBm	-84 dBm
Output RF spectrum (ORFS)				
Minimum carrier power at RF input	-20 dBm (nom)	-20 dBm (nom)	-20 dBm (nom)	-20 dBm (nom)
ORFS relative RF power uncertainty				
Due to modulation				
Offsets ≤ 1.2 MHz	± 0.09 dB	± 0.16 dB	± 0.26 dB	± 0.54 dB
Offsets ≥ 1.8 MHz	± 0.11 dB	± 0.18 dB	± 0.27 dB	± 0.95 dB
Due to switching	± 0.09 dB (nom)	± 0.12 dB (nom)	± 0.17 dB (nom)	± 0.36 dB (nom)
ORFS absolute RF power accuracy	± 0.19 dB (95%)	± 0.23 dB (95%)	± 0.27 dB (95%)	± 0.62 dB (95%)
GSM (GMSK): Dynamic range, spectrum due to modulation³				
Offset frequency				
100 kHz	70.2 dB	63.8 dB ⁴	63.7 dB ⁵	53.1 dB ⁶
200 kHz	77.4 dB	70.0 dB ⁴	69.5 dB ⁵	59.9 dB ⁶
250 kHz	79.6 dB	72.0 dB ⁴	71.4 dB ⁵	62.1 dB ⁶
400 kHz	83.6 dB	76.0 dB ⁴	75.0 dB ⁵	66.5 dB ⁶
600 kHz	86.2 (87.4 dB typ)	79.1 dB (80.8 dB typ) ⁴	77.6 dB (80.7 dB typ) ⁵	70.1 dB ⁶ (72.2 dB typ)
1.2 MHz	88.1 (90.3 dB typ)	82.7 dB (85.0 dB typ) ⁴	80.7 dB (83.7 dB typ) ⁵	74.3 dB ⁶ (77.0 dB typ)
1.8 MHz	90.7 (91.9 dB nom)	81.8 dB (83.2 dB nom) ⁴	81.3 dB (84.7 dB nom) ⁴	70.1 dB ⁶ (73.6 dB nom)
6.0 MHz	92.5 (94.5 dB nom)	86.4 dB (88.5 dB nom) ⁴	84.1 dB (88.1 dB nom) ⁴	72.0 dB ⁶ (77.3 dB nom)

1. Specifications based on 200 bursts.

2. tfa = transmitter frequency x frequency reference accuracy

3. 5-pole sync-tuned filters; methods: direct time and FFT

4. ORFS dynamic range specification for MXA is for instruments with serial number prefix ≥ MY/SG/US5233 (those instruments ship standard with N9020A-EP2 as the identifier). Refer to the GSM/EDGE chapter for the MXA specification guide for specification on the other MXA: www.keysight.com/find/mxa_specifications. For MXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

5. ORFS dynamic range specification for EXA is for instruments with serial number prefix ≥ MY/SG/US5340 (those instruments ship standard with N9010A-EP3 as the identifier). Refer to the GSM/EDGE chapter for the EXA specification guide for specification on the other EXA: www.keysight.com/find/exa_specifications. For EXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

6. ORFS dynamic range specification for CXA is for instruments with serial number prefix ≥ MY/SG/US5423 (those instruments ship standard with N9000A-EP4 as the identifier). Refer to the GSM/EDGE chapter for the CXA specification guide for specification on the other CXA: www.keysight.com/find/cxa_specifications. For CXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

Description	PXA	MXA	EXA	CXA
GSM (GMSK): Dynamic range, spectrum due to switching¹				
Offset frequency				
400 kHz	80.7 dB	73.7 dB ²	72.5 dB ³	64.4 dB ⁵
600 kHz	82.4 dB	76.4 dB ²	74.6 dB ³	67.6 dB ⁵
1.2 MHz	83.5 dB	79.1 dB ²	76.6 dB ³	70.9 dB ⁵
1.8 MHz	92.3 dB	84.7 dB ²	83.7 dB ³	71.6 dB ⁵
EDGE (NSR 8PSK and narrow QPSK): Dynamic range, spectrum due to modulation⁴				
Offset frequency				
100 kHz	70.2 dB	63.8 dB ²	63.9 dB ³	53.1 dB ⁵
200 kHz	77.1 dB	69.9 dB ²	69.3 dB ³	59.8 dB ⁵
250 kHz	79.1 dB	71.8 dB ²	71.0 dB ³	62.0 dB ⁵
400 kHz	82.4 dB	75.5 dB ²	74.2 dB ³	66.2 dB ⁵
600 kHz	84.2 (85.9 dB typ)	78.2 dB (80.3 dB typ) ²	76.4 dB (79.5 dB typ) ³	69.4 dB ⁵ (71.9 dB typ)
1.2 MHz	85.3 (87.7 dB typ)	80.9 dB (83.7 dB typ) ²	78.4 dB (81.5 dB typ) ³	72.7 dB ⁵ (76.2 dB typ)
1.8 MHz	88.8 (90.5 dB nom)	81.3 dB (82.9 dB nom) ²	80.3 dB (83.7 dB nom) ³	68.1 dB ⁵ (72.4 dB nom)
6.0 MHz	89.9 (92.3 dB nom)	84.9 dB (87.5 dB nom) ²	82.3 dB (86.2 dB nom) ³	69.2 dB ⁵ (74.8 dB nom)
EDGE (NSR 8PSK and narrow QPSK): Dynamic range, spectrum due to switching¹				
Offset frequency				
400 kHz	80.7 dB	73.7 dB ²	72.5 dB ³	64.4 dB ⁵
600 kHz	82.4 dB	76.4 dB ²	74.6 dB ³	67.6 dB ⁵
1.2 MHz	83.5 dB	79.1 dB ²	76.6 dB ³	70.9 dB ⁵
1.8 MHz	92.3 dB	84.7 dB ²	83.7 dB ³	71.6 dB ⁵
EDGE (NSR 16/32QAM; HSR QPSK/16QAM/32QAM) Dynamic range, spectrum due to modulation⁴				
Offset frequency				
100 kHz	70.0 dB	63.7 dB ²	63.5 dB ³	53.1 dB ⁵
200 kHz	76.4 dB	69.6 dB ²	68.8 dB ³	59.7 dB ⁵
250 kHz	78.1 dB	71.4 dB ²	70.3 dB ³	61.7 dB ⁵
400 kHz	80.5 dB	74.6 dB ²	72.9 dB ³	65.5 dB ⁵
600 kHz	81.5 (83.6 dB typ)	76.6 dB (79.8 dB typ) ²	74.3 dB (77.5 dB typ) ³	68.1 dB ⁵ (71.3 dB typ)
1.2 MHz	82.1 (84.6 dB typ)	78.3 dB (82.1 dB typ) ²	75.5 dB (78.7 dB typ) ³	70.3 dB ⁵ (74.4 dB typ)
1.8 MHz	86.2 (88.4 dB nom)	80.1 dB (84.0 dB nom) ²	78.6 dB (82.1 dB nom) ³	65.5 dB ⁵ (70.4 dB nom)
6.0 MHz	86.8 (89.4 dB nom)	82.6 dB (86.7 dB nom) ²	79.8 dB (83.6 dB nom) ³	66.0 dB ⁵ (71.8 dB nom)
EDGE (NSR 16/32QAM; HSR QPSK/16QAM/32QAM) Dynamic range, spectrum due to switching¹				
Offset frequency				
400 kHz	79.7 dB	73.3 dB ²	71.8 dB ³	64.1 dB ⁵
600 kHz	81.1 dB	75.7 dB ²	73.6 dB ³	67.0 dB ⁵
1.2 MHz	81.9 dB	77.8 dB ²	75.1 dB ³	69.8 dB ⁵
1.8 MHz	91.0 dB	84.2 dB ²	82.9 dB ³	70.3 dB ⁵

1. 5-pole sync-tuned filters
2. ORFS dynamic range specification for MXA is for instruments with serial number prefix \geq MY/SG/US5233 (those instruments ship standard with N9020A-EP2 as the identifier). Refer to the GSM/EDGE chapter for the MXA specification guide for specification on the other MXA: www.keysight.com/find/mxa_specifications. For MXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)
3. ORFS dynamic range specification for EXA is for instruments with serial number prefix \geq MY/SG/US5340 (those instruments ship standard with N9010A-EP3 as the identifier). Refer to the GSM/EDGE chapter for the EXA specification guide for specification on the other EXA: www.keysight.com/find/exa_specifications. For EXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)
4. 5-pole sync-tuned filters; methods: direct time and FFT
5. ORFS dynamic range specification for CXA is for instruments with serial number prefix \geq MY/SG/US5423 (those instruments ship standard with N9000A-EP4 as the identifier). Refer to the GSM/EDGE chapter for the CXA specification guide for specification on the other CXA: www.keysight.com/find/cxa_specifications. For CXA, phase noise optimization is set to Best Wide offset (offset > 100 kHz)

Ordering Information

Flexible licensing and configuration

- **Perpetual:** License can be used in perpetuity.
- **Time-based:** License is time limited to a defined period, such as 12-months.
- **Node-locked:** Allows you to use the license on one specified instrument/computer.
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool.
- **Floating:** Allows you to access the license on networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased.
- **USB portable:** Allows you to move the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately.
- **Software support subscription:** Allows the license holder access to Keysight technical support and all software upgrades

You Can Upgrade!

All of our X-Series application options are license-key upgradeable.



GSM/EDGE/Evo measurement application (N9071EM0D)

Model	Software License Type	Support Contract	Support Subscription (12-month) ²
N9071EM0D-1FP	Node-locked perpetual	R-Y5C-001-A ²	R-Y6C-001-L ²
N9071EM0D-1FL	Node-locked 12-month	R-Y4C-001-L ¹	Included
N9071EM0D-1TP	Transportable perpetual	R-Y5C-004-D ²	R-Y6C-004-L ²
N9071EM0D-1TL	Transportable 12-month	R-Y4C-004-L ¹	Included
N9071EM0D-1NP	Floating perpetual	R-Y5C-002-B ²	R-Y6C-002-L ²
N9071EM0D-1NL	Floating 12-month	R-Y4C-002-L ¹	Included
N9071EM0D-1UP	USB portable perpetual	R-Y5C-005-E ²	R-Y6C-005-L ²
N9071EM0D-1UL	USB portable 12-month	R-Y4C-005-L ¹	Included

One month software support subscription extensions³

Model	Description
R-Y6C-501 ³	1-month of software support subscription for node-locked license
R-Y6C-502 ³	1-month of software support subscription for floating license
R-Y6C-504 ³	1-month of software support subscription for transportable license
R-Y6C-505 ³	1-month of software support subscription for USB portable license

1. All time-based X-Series measurement application licenses includes a 12-month support contract which also includes the 12-month software support subscription as same duration.
2. Support contract must bundle software support subscription for all perpetual licenses in the first year. All software upgrades and Keysight support are provided for software licenses with valid support subscription.
3. After the first year, software support subscription may be extended with annual or monthly software support subscription extensions for perpetual licenses.

Try Before You Buy!

Evaluate a full-featured version of our X-Series measurement application with our **FREE** trial. Redeem one 30-day trial license of each measurement application online at: www.keysight.com/find/X-Series_apps_trial

Hardware Configurations

To learn more about compatible platforms and required configurations, please visit: www.keysight.com/find/X-Series_apps_platform

Software Models & Options

To learn more about X-Series measurement application licensing, model numbers and options, please visit:
www.keysight.com/find/X-Series_apps_model

Hardware Configuration

For optimizing the LTE and LTE-Advanced FDD/TDD measurement application, Keysight recommends a minimum level of instrument hardware functionality at each instrument performance point. Supported instruments include:

Benchtop:

- PXA N9030A
- MXA N9020A
- EXA N9010A
- CXA N9000A

PXIe:

- VSA (6 GHz) M9391A
- VSA (50 GHz) M9393A
- VXT M9420/21A
- CXA-m M9290A

N90x0A X-Series signal analyzer

Capability	Instrument Option	Benefit
Analysis bandwidth	10 or 25 MHz as default or higher	Required: Wider analysis bandwidth options such as 25/40/85/160 MHz can be selected depending on the specified signal analyzer model
Precision frequency reference	-PFR	Recommended: For enhanced frequency accuracy and repeatability for lower measurement uncertainty
Electronic attenuator	-EA3	Recommended: Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps
Pre-amplifier	3.6 GHz (-P03) or higher	Recommended: For maximizing the measurement sensitivity
Fine resolution step attenuator	-FSA	Recommended: Useful for maximizing useable dynamic range to see signals
Analog baseband I/Q inputs	-BBA on PXA and MXA only	Optional: To extend measurements at baseband if required by device under test

M9391/93A PXIe VSA vector signal analyzer

Description	Model-Option	Additional information
Frequency range 3 or 6 GHz	M9391A-F03, or F06	One required for M9391A
Frequency range 8.4, 14, 18, or 27 GHz	M9393A-F08, F14, F18, or F27	One required for M9393A
Frequency extension to 43.5 or 50 GHz	M9393A-FRZ or FRX	Optional (requires M9393A-F27)
Analysis bandwidth 40, 100 or 160 MHz	M9391A/M9393A-B04, B10 or B16	One required
Memory 128, 512 or 1024 MSa	M9391A/M9393A-M01, M05 or M10	One required
Frequency reference 10 MHz and 100 MHz	M9391A/M9393A-300	One required

M9420/21A PXIe VXT vector transceiver

Description	Model-Option	Additional information
Frequency range 3.8 or 6 GHz	M9420A/M9421A-504, or 506	One required
Analysis bandwidth 40, 80 or 160 MHz	M9420A/M9421A-B40/B80/B1X	One required
Memory 256 or 512 MSa	M9420A/M9421A-M02/M05	One required
Half duplex port	M9420A/M9421A-HDX	Optional
High output power	M9420A/M9421A-1EA	Optional

M9290A CXA-m PXIe signal analyzer

Description	Model-Option	Additional information
Frequency range 3, 7.5, 13.6 or 26.5 GHz	M9290A-F03, F07, F13, or F26	One required
Analysis bandwidth 25 MHz	M9290A-B25	Optional
Preamplifier, 3, 7.5, 13.6 or 26.5 GHz	M9290A-P03, P07, P13 or P26	One required
Fine resolution step attenuator	M9290A-FSA	Optional
Precision frequency reference	-PFR	Optional

Related Literature

Description	Publication number
N9071A & W9071A GSM/EDGE/EDGE Evolution, Self-Guided Demonstration	5990-5927EN
N9080A & W9080A LTE Measurement Application Measurement Guide	N9080-90006
N9071A & W9071A GSM/EDGE/EDGE Evolution, Measurement Guide	N9071-90016
Understanding GSM/EDGE Transmitter and Receiver Measurements for Base Transceiver Stations and their Components, Application Note	5968-2320E
Measuring EDGE Signals – New and Modified Techniques and Measurement Requirements, Application Note 1361	5980-2508EN
User's and Programmer's Reference Guide is available in the library section of the N9071A and W9071A product pages.	

Web

Product page:

www.keysight.com/find/N9071D

X-Series measurement applications:

www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:

www.keysight.com/find/X-Series

PXIe VXT vector transceiver:

www.keysight.com/find/VXT

PXIe VSA vector signal analyzer:

www.keysight.com/find/M9391A

www.keysight.com/find/M9393A

PXIe CXA-m signal analyzer:


www.keysight.com/find/M9290A

Application pages:

www.keysight.com/find/cellular

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.
From Hewlett-Packard to Agilent to Keysight.

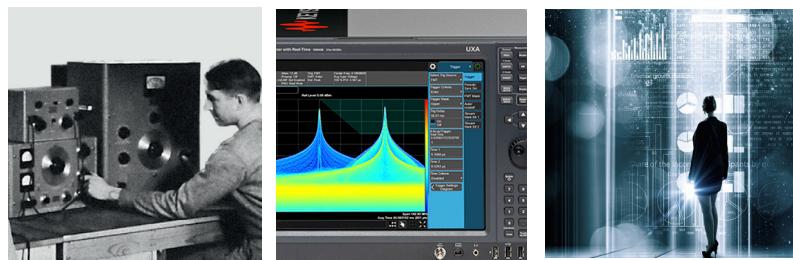

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/x-series_apps

www.keysight.com/find/N9071D

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified

ISO9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System