


# Keysight Technologies

## Remote Language Compatibility (RLC) X-Series App, Traditional UI N9061EMOD

### Technical Overview and Demo Guide

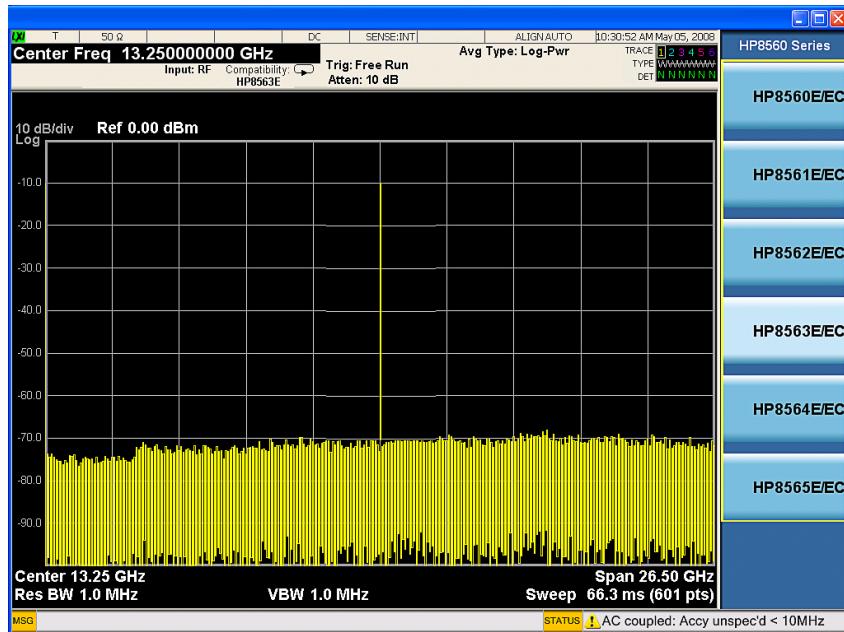

- Seamless ATE system migration to next generation
- Reduce ATE system cost with X-Series analyzers
- Run legacy programming codes using newer
- SCPI-based instruments without code modification

## RLC Measurement Application


In addition to a superior combination of speed, accuracy, flexibility, and dynamic range, the Keysight Technology, Inc. X-Series signal analyzers offer the broadest set of measurement applications. The RLC measurement application is an ideal tool for seamlessly evolving your ATE system to the next generation.

X-Series measurement applications can help you:


- Gain more insight into device performance with intuitive display and graphs for your application. Select from our library of over 25 different measurement applications.
- Ensure that your design meets the latest standard. Updates are made to the X-Series measurement applications as standards evolve.
- Apply the same measurement science across multiple hardware platforms for consistent measurement results over your design cycle from R&D to production.
- Choose the license structure that meets your business needs. We provide a range of license types (node-locked, transportable, floating or USB portable) and license terms (perpetual or time-based).

## Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.



Start with a 30-day free trial.  
[www.keysight.com/find/free\\_trials](http://www.keysight.com/find/free_trials)

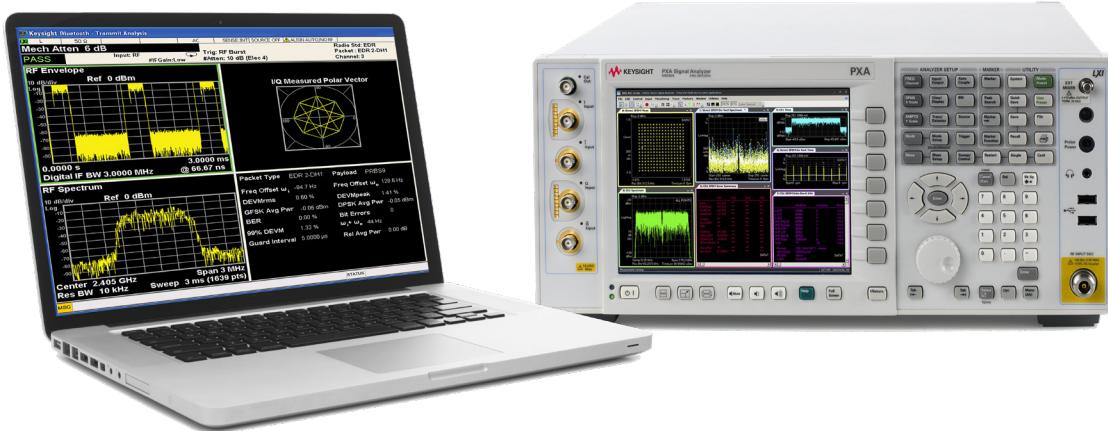

## Top Features

You selected HP/Keysight's legacy spectrum analyzers, such as the 856xE/EC or 8566/68 family, for your automatic test equipment (ATE) systems. After decades of success, you are probably considering transitioning your ATE system to the next generation, and, as your partner, Keysight is here to help make that transition as seamless as possible—so you can focus on achieving new successes in mission-critical tasks.

We understand the problems you are facing when evolving ATE systems. Some or all of the instruments in your ATE system racks become obsolete and some of them are no longer supported. Those instruments have to be replaced with the modern ones. However, ATE systems are very expensive to develop and certify. Once the remote test program sets for these ATE systems have been certified, changes require recertification which is expensive and time-consuming.

Finding modern replacement instruments with comparable performance to the legacy ones may not be so difficult. However, finding the instruments that can be placed in an ATE system with minimal disruption to test program sets, while still meeting the required specifications, can be a real challenge.

The X-Series signal analyzers (PXA/MXA/EXA), Keysight's next-generation signal analyzers and the fastest signal analyzers in the industry, offer a remote language compatibility (RLC) application (N9061A-2FP) with the legacy HP/Keysight 856xE/EC spectrum analyzers and N9061A-1FP for the 8566/68 spectrum analyzers. This application is an excellent solution to help you upgrade old ATE systems, which include 856xE/EC spectrum analyzers, to those including

Keysight's next-generation X-Series signal analyzers. The X-Series N9061A-2FP RLC application currently provides as many as 164 supported programming commands from 856xE/EC for the most frequently used spectrum analysis functions in ATE systems.

### Gain competitive edge with innovative X-Series signal analyzers

The HP 856xE was launched 16 years ago and the 856xE family was very well received because of its unprecedented RF performance and features. Emerging in the pre-SCPI (standard commands for programming instruments) era, when an electronic memory device used inside the instrument was prohibitively expensive, the 856xE employed a very instrument-specific command set for remote programming.

Eight years later, HP/Keysight introduced the 856xEC family, which replaced the spectrum analyzer's monochrome CRT tube with a color LCD display while sharing the same remote programming language with its predecessor, the 856xE.

Today, the Keysight X-Series signal analyzers drive signal analysis to the next level, with a combination of Keysight's technological innovations and decades of spectrum analyzer design and manufacturing experiences. The X-Series' excellent performance provides an ideal hardware replacement for the 856xE/EC and 8566/68. By replacing your legacy 856xE/EC with an X-Series, you will take full advantage of the technology breakthroughs in the X-Series signal analyzers:

### Speed

The X-Series are the industry's fastest signal analyzers in their class. At up to 300% faster than other signal and spectrum analyzers, the X-Series signal analyzers help you to significantly reduce test time and increase your manufacturing throughput.

### Performance

The X-Series signal analyzers deliver outstanding performance. For example, the MXA signal analyzer offers 0.23 dB of typical absolute amplitude accuracy—over 3 times better than the 856xE/EC accuracy. The improvement in amplitude accuracy enables you to set more stringent test criteria to increase your manufacturing yields.

### Cost

The X-Series signal analyzers are significantly less expensive than the 856xEC. A 26.5 GHz MXA is about 24% less expensive than the 8563EC, and a 3.6 GHz MXA is about 37% less. And if the economy-class EXA can meet your test requirements, you can save even more.

Like all other modern signal/spectrum analyzers, the X-Series signal analyzers use SCPI commands for remote programming. Therefore, a bridge between the legacy 856xE/EC or 8566/68 remote language and the SCPI language that Keysight X-Series uses becomes necessary when migrating the 856xE/EC to the X-Series analyzer in your ATE system. The X-Series RLC application (N90601A-2FP/1FP) is that bridge. It enables an X-Series analyzer to run most customers' 856xE/EC or 8566/68 programming codes without modification.

## Measurement Application Demonstration Guide

### How the X-Series RLC application works

Figure 1 shows a simplified working block diagram for the X-Series RLC application, specifically for the N9061EMOD-2FP/1FP. The X-Series signal analyzer, using the SCPI commands for remote user interface (RUI), is unable to understand the legacy remote program commands. Likewise, the instrument-specific, legacy remote program will not recognize the responses returned from X-Series signal analyzers in the form of SCPI commands.

The N9061EMOD X-Series RLC application provides an emulation process that enables the user's legacy program and X-Series signal analyzer to understand each other. As shown in the simplified block diagram below, the RLC application installed on the X-Series signal analyzer, emulates the behaviors of the legacy spectrum analyzer (such as the 856xE/EC or 8566/68). As a result, the user's legacy program considers the X-Series signal analyzer to be a legacy spectrum analyzer and controls the X-Series signal analyzer just the way it did before the migration.

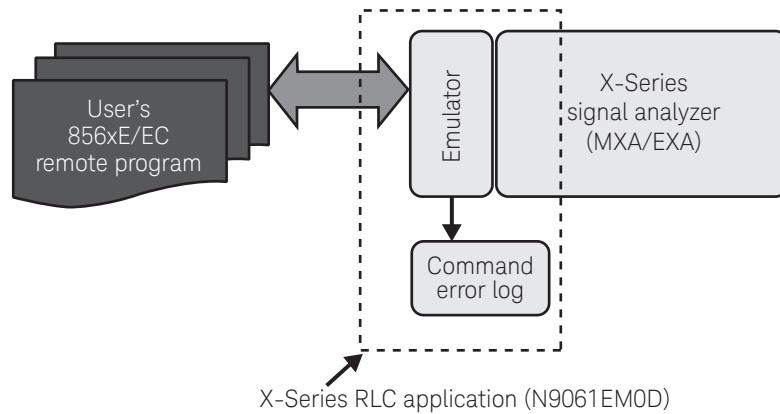


Figure 1. A simplified working block-diagram for X-Series RLC application

It is important to point out that the emulation processes, as shown in the block diagram, are bidirectional. The purpose of an RLC application is to enable the X-Series signal analyzer to emulate the legacy analyzer. Therefore, not only does the RLC application make the X-Series understand the legacy commands for correct implementations, but it also makes the responses from the X-Series signal analyzer, such as measurement results and query results, understandable to the legacy remote program.

Depending on use cases, some legacy commands may not technically be possible for the emulation due to the substantial differences in the architecture and implementation between the legacy and X-Series analyzers. In these instances, the legacy commands that can't be emulated are logged to a command error log. This error log helps users understand which legacy commands are not emulated by the RLC application, and an appropriate workaround may be required.

## Starting the RLC application and selecting the appropriate legacy model to emulate

After the RLC application has been activated, the Remote Language Compatibility soft key is added to the Mode menu that allows the user to switch into an RLC application (see Figure 2). The specific instrument to be emulated is selected under the Mode Setup menu (shown in Figure 3).

The X-Series RLC application can be accessed in two ways: 1) from the front-panel user interface (FPUI), or 2) via remote user interface (RUI). In the following demo procedure for FPUI, keystrokes surrounded by [ ] indicate front-panel hard keys, whereas those surrounded by { } indicate soft keys on the display of the X-Series signal analyzers to be a legacy spectrum analyzer and controls the X-Series signal analyzer just the way it did before the migration.

1. FPUI access:  
X-Series: [MODE], {Remote Language Compatibility}; [Mode Setup], {HP8560 series}, {HP856xE/EC} where x = 0 to 5 (for example, if the 8563EC is to emulate, then select {HP8563E/EC})

While all the 856xE and 856xEC share a common set of remote commands, each model may respond to the commands quite differently. For example, when responding to a FS (Full Span) command, an 8560EC sets its frequency span to 2.9 GHz, whereas an 8563EC sets its span to 26.5 GHz.

2. RUI access:

INSTrument:SELect  
SYSTem:LANGuage

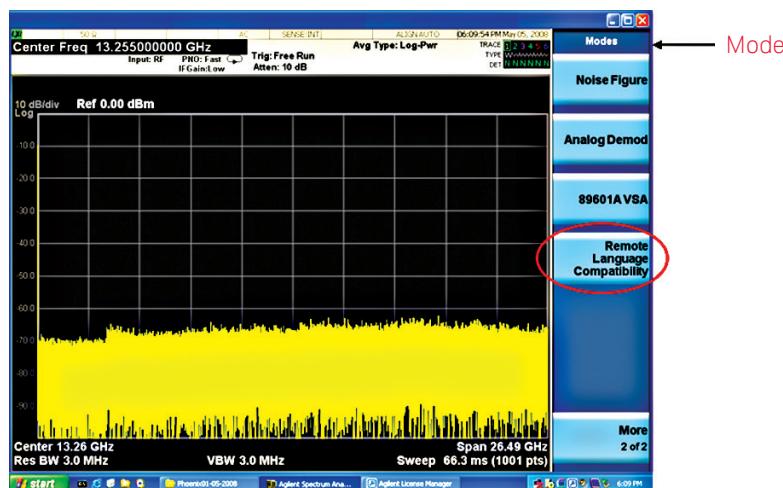


Figure 2. RLC is accessed under the **Mode** menu, just like other applications

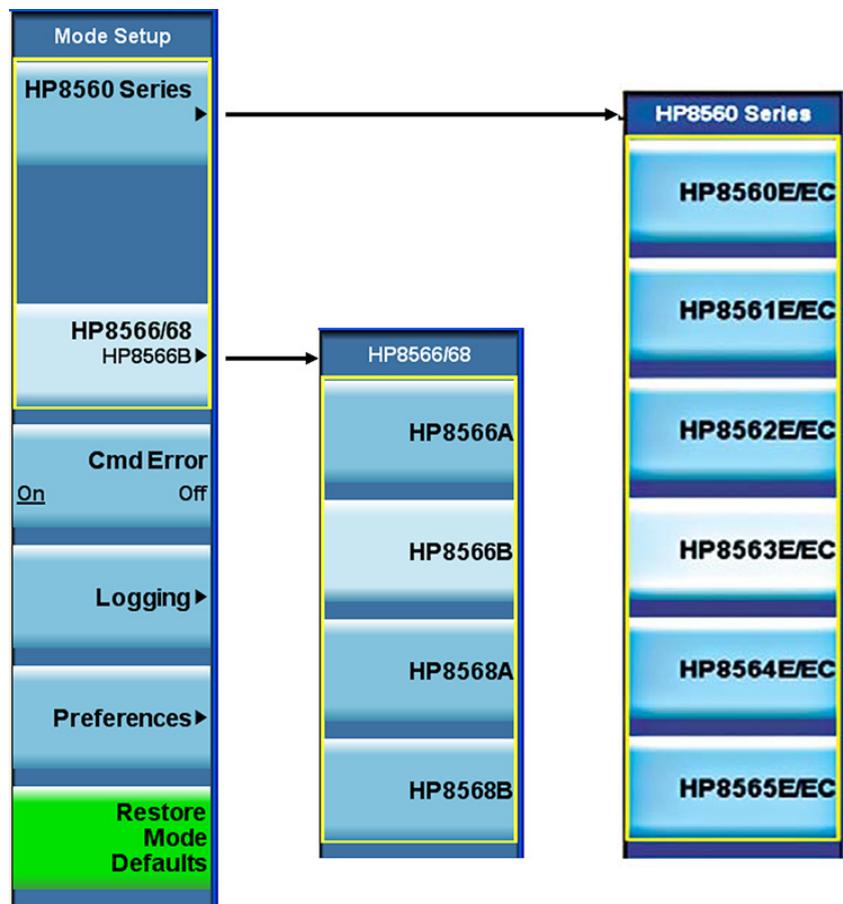


Figure 3. Mode Setup menu when selecting the legacy model number to emulate

## Troubleshooting when the legacy command is not supported or has syntactic errors

Rather than hiding the unsupported legacy commands, the X-Series RLC application allows you to display the CMD ERR error messages, which will appear in the Message bar as an advisory message. It shows the error format as: **CMD ERR, <string>**. This will occur upon receipt of a recognized legacy command that is not supported by the RLC application, or if either the command syntax or any of its parameters are incorrectly formed.

By toggling the **CMD Error** soft key, you can enable or disable the display of the error message.

Furthermore, the Logging menu allows the user to scroll the log window (Previous Page/Next Page), to refresh and clear the RLC command error log (Refresh/Clear Log)—see Figure 5. The logging menu is only accessible from the FPUI.

## Selecting preferences for your emulation

Preferences allow the user to change the emulation behavior to gain usability, speed, or measurement accuracy. However, the default value for each parameter in the Preference menu is the closest emulation of legacy behavior.

In RLC mode, each preference is a configurable feature. They can be selected either via the FPUI or RUI. Preference settings are persistent. If they are changed by the user, they are unaffected by mode switching, language switching, mode preset, or even power on. They are only preset to their default state using the Restore Mode Defaults key in the Mode Setup menu via FPUI, or using the commands, **INST:DEF** or **SYST:PRES:PERS**.



Figure 4. The Logging menu

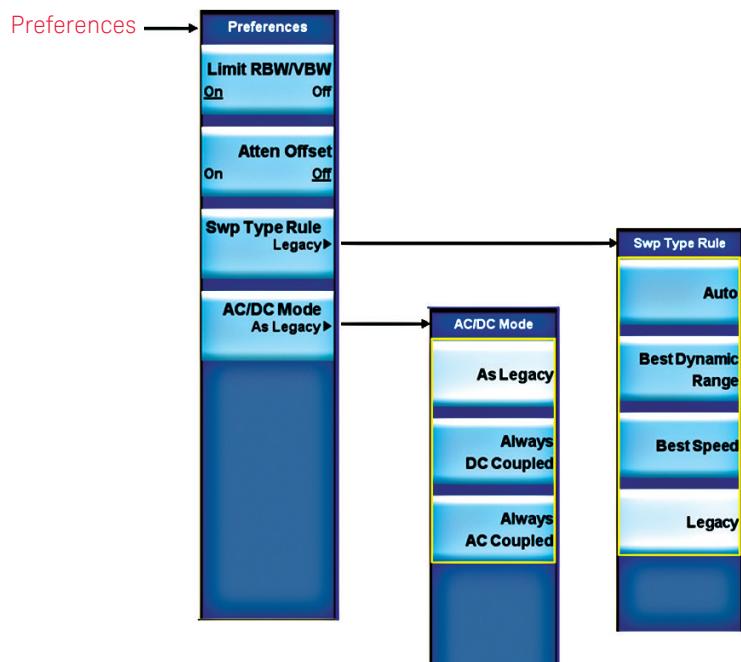


Figure 5. Setting preferences for the emulation behavior via the Preferences menu

Let's look at two examples for the preferences setting:

1. Limit RBW/VBW
2. Sweep type rules

**Limit RBW/VBW** can be used for limiting the valid resolution bandwidth (RBW) and video bandwidth (VBW) values to those appropriate for the currently selected remote language. In the case of the 856xE/EC emulation, setting the RBW/VBW to **ON** limits the RBW and VBW values to what the 856xE/EC can have. Setting it to **OFF** causes the RBW/VBW filters to use the X-Series range of values. To activate this feature:

1. **FPUI Access:**  
[Mode Setup],  
{Preferences},  
{Limit RBW/VBW}
2. **RUI Access:**  
[;SENSe]:RLC:BANDwidth:  
LIMit ON|OFF|1|0

**Sweep type rules** determines when the instrument uses FFT vs. Swept mode. The FFT mode offers substantially faster measurements in some cases. The 856xE/EC family switches between the FFT and swept mode based on the RBW setting—FFT mode when RBW  $\leq 100$  Hz, and Swept mode when RBW  $\geq 300$  Hz.

By contrast, in the X-Series signal analyzers, users can select between **Best Dynamic Range (Swept)** and **Best Speed (FFT)** to fit their measurement applications. Once the **Legacy** is selected, the sweep mode will be determined by the RBW selected. To activate this feature:

1. **FPUI Access:**  
[Mode Setup],  
{Preferences},  
{Sweep type rules}
2. **RUI Access:**  
[:SENSe]:RLC:SWEep:RULEs  
SPEEd|DRAnge|LEGACY

For a list of supported commands for the 856xE/EC and 8566/68, refer to the N9061EM0D Remote Language Capability User's and Programer's Reference at:

<http://cp.literature.keysight.com/litweb/pdf/N9020-90091.pdf>

## Ordering Information

### Flexible licensing and configuration

- **Perpetual:** License can be used in perpetuity.
- **Time-based:** License is time limited to a defined period, such as 12-months.
- **Node-locked:** Allows you to use the license on one specified instrument/computer.
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool.
- **Floating:** Allows you to access the license on networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased.
- **USB portable:** Allows you to move the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately.
- **Software support subscription:** Allows the license holder access to Keysight technical support and all software upgrades

### You Can Upgrade!

All of our X-Series application options are license-key upgradeable.



### Remote Language Compatibility measurement application (N9061EMOD)

Model	Software License Type	Support Contract	Support Subscription (12-month) <sup>1,2</sup>
N9061EMOD-1FP	Node-locked perpetual	R-Y5C-001-A <sup>2</sup>	R-Y6C-001-L <sup>2</sup>
N9061EMOD-1FL	Node-locked 12-month	R-Y4C-001-L <sup>1</sup>	Included
N9061EMOD-1TP	Transportable perpetual	R-Y5C-004-D <sup>2</sup>	R-Y6C-004-L <sup>2</sup>
N9061EMOD-1TL	Transportable 12-month	R-Y4C-004-L <sup>1</sup>	Included
N9061EMOD-1NP	Floating perpetual	R-Y5C-002-B <sup>2</sup>	R-Y6C-002-L <sup>2</sup>
N9061EMOD-1NL	Floating 12-month	R-Y4C-002-L <sup>1</sup>	Included
N9061EMOD-1UP	USB portable perpetual	R-Y5C-005-E <sup>2</sup>	R-Y6C-005-L <sup>2</sup>
N9061EMOD-1UL	USB portable 12-month	R-Y4C-005-L <sup>1</sup>	Included

### One month software support subscription extensions<sup>3</sup>

Model	Description
R-Y6C-501 <sup>3</sup>	1-month of software support subscription for node-locked license
R-Y6C-502 <sup>3</sup>	1-month of software support subscription for floating license
R-Y6C-504 <sup>3</sup>	1-month of software support subscription for transportable license
R-Y6C-505 <sup>3</sup>	1-month of software support subscription for USB portable license

1. All time-based X-Series measurement application licenses includes a 12-month support contract which also includes the 12-month software support subscription as same duration.
2. Support contract must bundle software support subscription for all perpetual licenses in the first year. All software upgrades and Keysight support are provided for software licenses with valid support subscription.
3. After the first year, software support subscription may be extended with annual or monthly software support subscription extension.

### Try Before You Buy!

Evaluate a full-featured version of our X-Series measurement application with our **FREE** trial. Redeem one 30-day trial license of each measurement application online at: [www.keysight.com/find/X-Series\\_apps\\_trial](http://www.keysight.com/find/X-Series_apps_trial)

### Hardware Configurations

To learn more about compatible platforms and required configurations, please visit: [www.keysight.com/find/X-Series\\_apps\\_platform](http://www.keysight.com/find/X-Series_apps_platform)

### Software Models & Options

To learn more about X-Series measurement application licensing, model numbers and options, please visit: [www.keysight.com/find/X-Series\\_apps\\_model](http://www.keysight.com/find/X-Series_apps_model)

## Hardware Configuration

For optimizing the Remote Language Compatibility (RLC) measurement application, Keysight recommends a minimum level of instrument hardware functionality at each instrument performance point. Supported instruments include:

Benchtop:

- PXA N9030A    – EXA N9010A
- MXA N9020A    – CXA N9000A

### N90x0A X-Series signal analyzer

Capability	Instrument Option	Benefit
Analysis bandwidth	10 or 25 MHz as default or higher	<b>Required:</b> Wider analysis bandwidth options such as 25/40/85/160 MHz can be selected depending on the specified signal analyzer model
Precision frequency reference	-PFR	<b>Recommended:</b> For enhanced frequency accuracy and repeatability for lower measurement uncertainty
Electronic attenuator	-EA3	<b>Recommended:</b> Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps
Pre-amplifier	3.6 GHz (-P03) or higher	<b>Recommended:</b> For maximizing the measurement sensitivity
Fine resolution step attenuator	-FSA	<b>Recommended:</b> Useful for maximizing useable dynamic range to see signals
Analog baseband I/Q inputs	-BBA on PXA and MXA only	<b>Optional:</b> To extend measurements at baseband if required by device under test

For a complete list of specifications refer to the appropriate specifications guide.

PXA: [www.keysight.com/find/pxa\\_specifications](http://www.keysight.com/find/pxa_specifications)


MXA: [www.keysight.com/find/mxa\\_specifications](http://www.keysight.com/find/mxa_specifications)

EXA: [www.keysight.com/find/exa\\_specifications](http://www.keysight.com/find/exa_specifications)

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

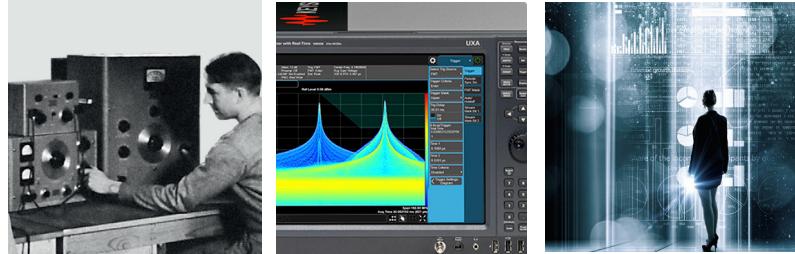

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.



#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/X-Series\\_apps](http://www.keysight.com/find/X-Series_apps)

[www.keysight.com/find/N9061EM0D](http://www.keysight.com/find/N9061EM0D)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-9-7-17)

 DEKRA Certified

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System