

Keysight Technologies

W-CDMA/HSPA+

X-Series Measurement App, Traditional UI

N9073EM0D

Technical Overview



- Perform W-CDMA, HSPA, and HSPA+ downlink and uplink transmitter test per 3GPP standard
- Perform one-button tests with pass/fail limit per 3GPP standard
- Use hardkey/softkey manual user interface or SCPI remote user interface
- Leverage built-in, context-sensitive help
- Flexible licensing provides the option of using perpetual or time based licenses with one or multiple signal analyzers

W-CDMA/HSPA+ Measurement Application


The W-CDMA/HSPA+ measurement application transforms the X-Series signal analyzers into 3GPP standard-based transmitter testers. The application provides fast, one-button RF conformance measurements to help you design, evaluate, and manufacture your W-CDMA/HSPA/HSPA+ base station and user equipment devices. The measurement application closely follows the 3GPP standard, allowing you to stay on the leading edge of your design and manufacturing challenges.

X-Series measurement applications can help you:

- Gain more insight into device performance with intuitive display and graphs for your application. Select from our library of over 25 different measurement applications.
- Ensure that your design meets the latest standard. Updates are made to the X-Series measurement applications as standards evolve.
- Apply the same measurement science across multiple hardware platforms for consistent measurement results over your design cycle from R&D to production.
- Choose the license structure that meets your business needs. We provide a range of license types (node-locked, transportable, floating or USB portable) and license terms (perpetual or time-based).

Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.



Start with a 30-day free trial.
www.keysight.com/find/free_trials



Technology Overview

Wideband code-division multiple-access (W-CDMA) is one of the main technologies for the implementation of third-generation (3G) cellular systems. Release 99 of the 3GPP specifications provided the evolutionary path for GSM, GPRS, and EDGE technologies, enabling more spectrally efficient and better performing voice and data services through the introduction of a 5 MHz W-CDMA carrier.

High speed downlink packet access (HSDPA), the first step in the evolution of WCDMA was introduced in Release 5 of the 3GPP standard. HSDPA enhances the WCDMA downlink packet-data performance and capabilities in terms of higher peak data rate, reduced latency, and increased capacity.

High-speed uplink packet access (HSUPA) also known as “enhanced uplink” was introduced in W-CDMA Release 6. It provides improvements in W-CDMA uplink capabilities and performance in terms of much higher data rates in the uplink, reduced latency, and improved system capacity and is therefore a companion technology to HSDPA. Together, HSDPA and HSUPA are commonly referred to as high-speed packet access (HSPA).

HSPA+, also known as “HSPA evolution,” was introduced to W-CDMA in Release 7 with significant enhancements in Releases 8, 9 and 10 of the 3GPP standard. 3GPP Release 7 of the standard introduced new major HSPA+ features such as multiple input multiple output (MIMO) for downlink as well as higher order

modulation; 64QAM in the downlink and 4PAM (16QAM) in the uplink. However, for downlink, it only allowed operation for either MIMO or the 64QAM. Release 8 of the standard allowed simultaneous operation of 64QAM and MIMO as well as defined dual carrier operation in the downlink (dual cell HSDPA). Release 9 of the standard defined dual carrier operation in the uplink (dual cell HSUPA), dual band HSDPA as well as combination of dual cell HSDPA and MIMO. Release 10 of the standard introduced four carrier HSDPA (quad-cell HSDPA).

Table 1. Key differences in W-CDMA, HSPA and HSPA+ standards.

	W-CDMA		HSPA		HSPA+	
	Downlink	Uplink	HSDPA	HSUPA	HSPA+ downlink	HSPA+ uplink
3GPP standard	Release 99	Release 99	Release-5	Release-6	Release 7 and beyond	Release 7 and beyond
Modulation	QPSK	BPSK	QPSK, 16QAM	BPSK	QPSK, 16QAM, 64QAM	BPSK, 4PAM (16QAM)
Carrier bandwidth	5 MHz	5 MHz	5 MHz	5 MHz	5 MHz, 10 MHz with dual-cell (Release 8), 20 MHz with four carrier HSDPA (Release 10)	5 MHz, 10 MHz with dual-cell (Release 9)
Data channel	Dedicated (voice/packet)	Dedicated (voice/packet)	Shared (packet)	Dedicated (packet)	Shared (packet)	Dedicated (packet)
Peak data rate	384 kbps	384 kbps	14.4 Mbps (16QAM)	5.7 Mbps	<ul style="list-style-type: none"> · 21.1 Mbps (64QAM) · 42.2 Mbps (64QAM and MIMO) · 84.4 Mbps (64QAM DC-HSDPA and MIMO) · 168.8 Mbps (64QAM QC-HSDPA and MIMO) 	<ul style="list-style-type: none"> · 11.5 Mbps (16QAM) · 23 Mbps (DC-HSUPA)

RF Transmitter Tests

With the X-Series signal analyzers and the W-CDMA/HSPA+ measurement application you can perform RF transmitter measurements on base station and user equipment devices in time, frequency, and modulation domains. Measure basic W-CDMA signals as well as HSPA (HSDPA/HSUPA) and HSPA+ signals with all channel configurations.

For high-speed manufacturing, a single acquisition combined W-CDMA measurement is available where the speed is up to 20 times faster than traditional one-button measurements (for details refer to Ordering Information).

Standard-based RF transmitter tests

The RF transmitter test requirements for W-CDMA/HSPA/HSPA+ are defined in 3GPP TS 25.141 (BTS) and 3GPP TS34.121 (UE) of the 3GPP standard. Table 2 shows the 3GPP required BTS RF transmitter tests along with the corresponding measurements available in the X-Series and 89600 VSA W-CDMA applications. Table 4 shows similar information for UE transmitter tests.

Table 2. Required base station (BTS) RF transmitter measurements and the corresponding measurements in the N9073EMOD measurement application and 89600 VSA software

3GPP TS25.141 subclause	Transmitter test	N9073EMOD X-Series measurement application	89601B-B7N
6.2.1	Base station maximum output power	Total power ¹	Total power ¹
6.2.2	CPICH power accuracy	CPICH power ¹	CPICH power ¹
6.3	Frequency error	Freq error ¹	Freq error ¹
6.4.1	Inner loop power control	Channel power ²	IQ meas time ³
6.4.2	Power control steps	Channel power ²	IQ meas time ³
6.4.3	Power control dynamic range	Channel power ²	IQ meas time ³
6.4.4	Total power dynamic range	Total power ¹	Total power ¹
6.4.5	IPDL time mask	Chip power vs. time ⁴	Composite meas time ⁴
6.5.1	Occupied bandwidth	Occupied BW	OBW ⁵
6.5.2.1	Spectrum emission mask	Spectrum emission mask	Not available ⁶
6.5.2.2	Adjacent channel leakage power ratio	ACP	ACP ⁵
6.5.3	Spurious emissions	Spurious emissions	Not available ⁶
6.6	Transmit intermodulation	ACP, SEM, spur emissions or spectrum analyzer mode	Not available ⁶
6.7.1	Error vector magnitude	EVM ¹	EVM ¹
6.7.2	Peak code domain error	PkCDE ¹	PkCDE ¹
6.7.3	Time alignment error in Tx diversity and MIMO transmission	Time offset ⁷ (under mod accuracy)	Time offset (under error summary or MIMO info trace). Note: 89601B-B7U supports 2x2 MIMO. ⁷
6.7.4	Relative code domain error	64QAM RCDE (under mod accuracy)	RCDE for 64QAM (under composite error summary)

1. For N9073EMOD application, these values are found in "Capture Time Summary" view under Mod Accuracy measurement. For 89601B-B7N, these values are found under "Composite Slot Summary" trace.
2. This "channel power" metric is reported under Symbol EVM error summary result under code domain power measurement quad view. "Symbol power" trace under code domain power quad view can also be used for this measurement however RMS slot power is not provided.
3. Measurement parameters must be set up manually. IQ Meas Time with LogMag (dB) format with band marker over each slot length can be used.
4. Measurement parameters must be set up manually. For N9073EMOD application, "chip power vs. time" is one of the traces displayed in the "symbol power" display under code domain quad view. For 89601B-B7N, "composite Meas Time" trace with LogMag (dB) format provides chip power in dB (dBm value not available).
5. Measurement parameters must be set up manually. If 89601B Option B7N is used with a Keysight spectrum or signal analyzer, these measurements are available as part of the spectrum analyzer mode under power suite measurements.
6. If 89601B Option B7N is used with a Keysight spectrum or signal analyzer, these measurements are available as part of the spectrum analyzer mode under power suite measurements.
7. Both the v and 89601B Option B7N can perform the time offset measurement for Tx diversity. In addition, the 89601B Option B7N supports 2x2 MIMO analysis using dual channel hardware such as dual-MXA, dual-EXA, N7109A multi-channel signal analyzer, or Keysight Oscilloscopes.

Measurement details

All of the RF transmitter measurements as defined by the 3GPP standard, as well as a wide range of additional measurements and analysis tools, are available with a press of a button (Table 3 and 5). These measurements are fully remote controllable via the IEC/IEEE bus or LAN, using SCPI commands.

Analog baseband measurements are available on the PXA or MXA signal analyzer equipped with BBIQ hardware. Supported baseband measurements include all of the modulation quality plus I/Q waveform measurements.

Measurement details for base station transmitter test

Table 3. One-button measurements for base station provided by the N9073EM0D measurement application

Technology	W-CDMA	HSDPA	HSPA+
Modulation Accuracy			
Rho	●	●	●
RMS EVM	●	●	●
Peak EVM	●	●	●
Pk CDE	●	●	●
Pk active CDE	●	●	●
RMS mag error	●	●	●
RMS phase error	●	●	●
Freq error	●	●	●
I/Q origin offset	●	●	●
Time offset	●	●	●
CPICH power	●	●	●
Total power	●	●	●
64QAM RCDE			●
QPSK EVM	●	●	●
Code domain power	●	●	●
Time alignment error for Tx diversity, and MIMO	●	●	●
Channel power	●	●	●
ACP	●	●	●
Spectrum emission mask (SEM)	●	●	●
Spurious emissions	●	●	●
Occupied bandwidth	●	●	●
CCDF	●	●	●
Monitor spectrum	●	●	●
I/Q waveform	●	●	●

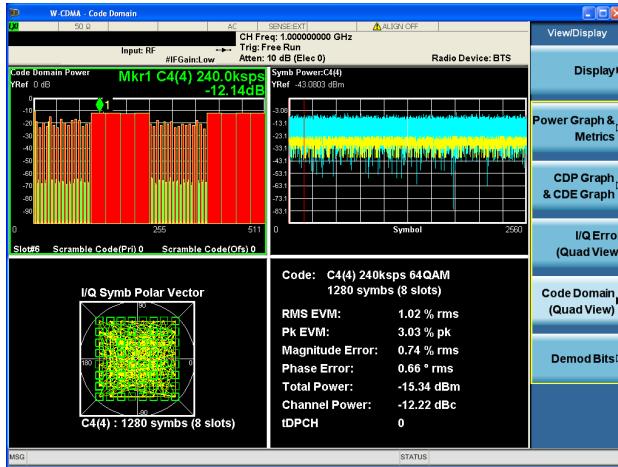


Figure 1. HSPA+ 64QAM code domain power quad view

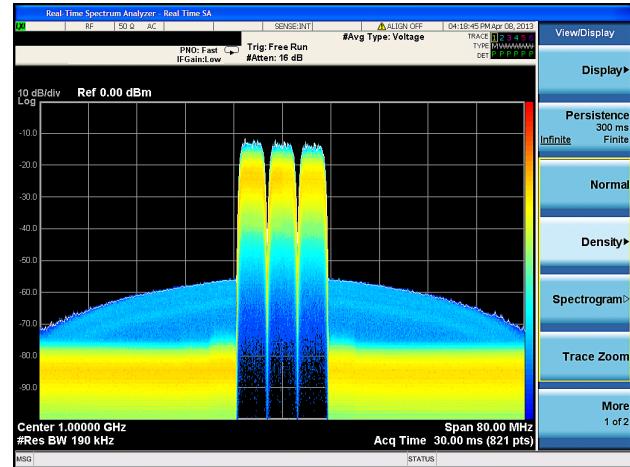


Figure 2. Real-time view of multi-carrier W-CDMA signal using RTSA option on the PXA or MXA signal analyzers

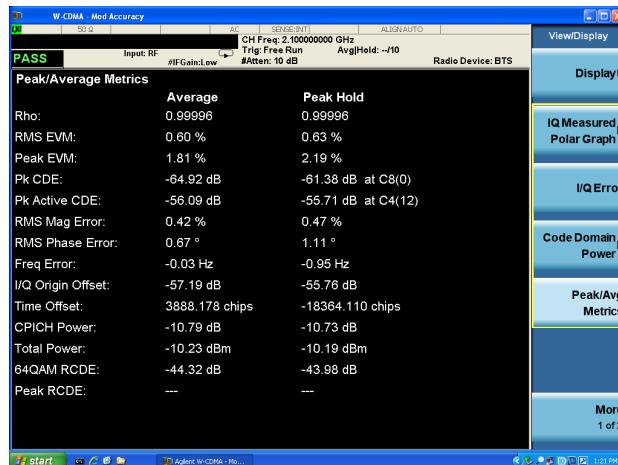


Figure 3. HSPA+ modulation analysis with 64QAM RCDE metrics

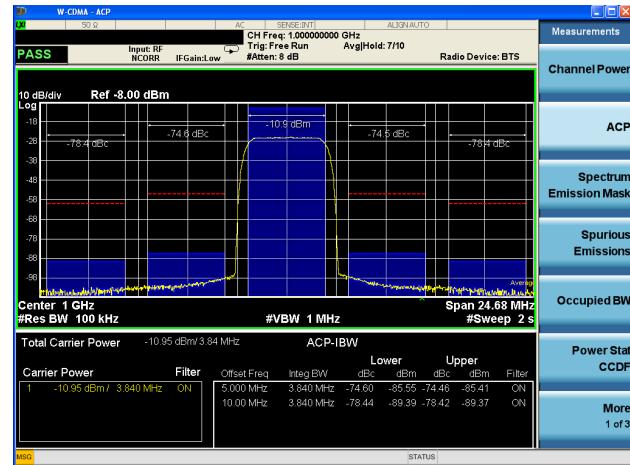


Figure 4. W-CDMA ACLR measurement

Table 4. Required user equipment (UE) RF transmitter measurements and the corresponding measurements in the N9073EMOD measurement application and 89600 VSA software.

3GPP TS34.121 subclause	Transmitter test	N/W9073A X-Series measurement application	89601B-B7N
5.2	Maximum output power	Total power ¹	Total power ¹
5.2A, 5.2AA	Maximum output power with HS-DPCCH	Total power ¹	Total power ¹
5.2B	Maximum output power with HS-DPCCH and E-DCH	Total power ¹	Total power ¹
5.2C	UE Relative code domain power accuracy	Not available ²	Not available ²
5.2D	UE Relative code domain power accuracy for HS-DPCCH and E-DCH	Not available ²	Not available ²
5.2E	UE Relative code domain power accuracy for HS-DPCCH and E-DCH with 16QAM	Not available ²	Not available ²
5.3	Frequency error	Freq error ¹	Freq error ¹
5.4.1	Open loop power control in the uplink	Power control (Meas type = PRACH power)	Not available
5.4.2	Inner loop power control in the uplink	Power control (Meas type = slot power)	IQ Meas time ³
5.4.3	Minimum output power	Channel power	Channel power using band power marker
5.4.4	Out-of-synchronization handling of output power	Manual configuration using symbol power vs. time or I/Q waveform (time domain) trace	Not available
5.5.1	Transmit off power	Power control (Meas type = slot power and I/Q waveform with RRC filtered)	Not available
5.5.2	Transmit on/off time mask	Power control (Meas type = PRACH power)	Manual configuration using "Time" trace with trigger and band power marker
5.6	Change of TFC	Power control (Meas type = slot power)	IQ meas time ³
5.7	Power setting in uplink compressed mode	Power control (Meas type = slot power)	IQ meas time ³
5.7A	HS-DPCCH power control	Power control (Meas type = slot phase) with meas interval = 0.5 slot	IQ meas time with "LogMag (dB)" with band marker over each half-slot length.
5.8	Occupied bandwidth	Occupied bandwidth	OBW ⁴
5.9	Spectrum emission mask	Spectrum emission mask	Not available ⁵
5.9A	Spectrum emission mask with HS-DPCCH	Spectrum emission mask	Not available ⁵
5.9B	Spectrum emission mask with E-DCH	Spectrum emission mask	Not available ⁵
5.10	Adjacent channel leakage power ratio	ACP	ACP ⁴
5.10A	Adjacent channel leakage power ratio with HS-DPCCH	ACP	ACP ⁴
5.10B	Adjacent channel leakage power ratio with E-DCH	ACP	ACP ⁴
5.11	Spurious emissions	Spurious emissions	Not available ⁵

1. For N/W9073A application, these values are found in "Capture Time Summary" table under Mod Accuracy measurement. For 89601B-B7N, these values are found under "Composite Slot Summary" trace.
2. This measurement is not supported. One possible way is to make code domain power measurement and subtract the result from the expected code domain power value.
3. Measurement parameters must be set up manually. IQ Meas Time trace with LogMag(dB) format and band power marker over each slot length.
4. Measurement parameters must be set up manually. If 89601B Option B7N is used with a Keysight spectrum or signal analyzer, these measurements are available as part of the spectrum analyzer mode under PowerSuite measurements.
5. If 89601B Option B7N is used with a Keysight spectrum or signal analyzer, these measurements are available as part of the spectrum analyzer mode under power suite measurements.

Table 4. (continued)

3GPP TS34.121 Paragraph #	Transmitter test	N9073EMOD X-Series measurement application	89601B-B7N
5.12	Transmit intermodulation	ACP	ACP ⁴
5.13.1	Error vector magnitude	EVM ¹	EVM ¹
5.13.1A	Error vector magnitude with HS-DPCCH	Power control (meas type = slot phase) with meas interval = 0.5 slot	EVM (over half-slot length)
5.13.1AA	Error vector magnitude and phase discontinuity with HS-DPCCH	Power control (meas type = slot phase) with meas interval = 0.5 slot	Not available
5.13.1AAA	EVM and IQ origin offset for HS-DPCCH and E-DCH with 16QAM	Mod accuracy	Error summary trace
5.13.2	Peak code domain error	PkCDE ¹	PkCDE ¹
5.13.2A	Relative code domain error with HS-DPCCH	RCDE in mod accuracy	RCDE in code domain offsets
5.13.2B	Relative code domain error with HS-DPCCH and E-DCH	RCDE in mod accuracy	RCDE in code domain offsets
5.13.2C	Relative code domain error with HS-DPCCH and E-DCH with 16QAM	RCDE in mod accuracy	RCDE in code domain offsets
5.13.3	UE phase discontinuity	Power control (meas type = slot phase)	Not available
5.13.4	PRACH preamble quality	QPSK EVM	QPSK EVM (using Option AYA)

1. For N/W9073A application, these values are found in "Capture Time Summary" table under Mod Accuracy measurement.
For 89601B-B7U, these values are found under "Composite Slot Summary" trace.

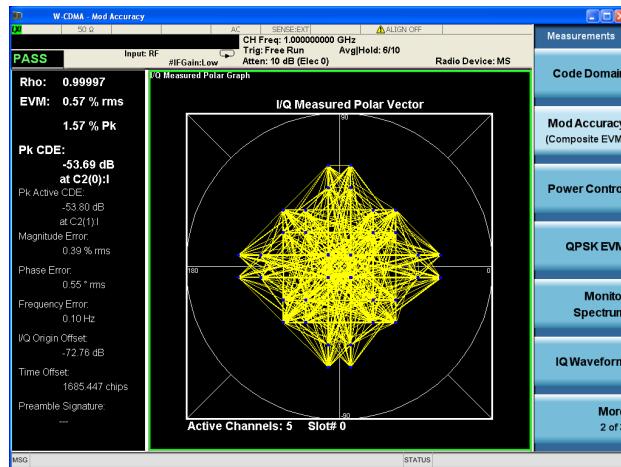


Figure 5. W-CDMA uplink EVM measurement

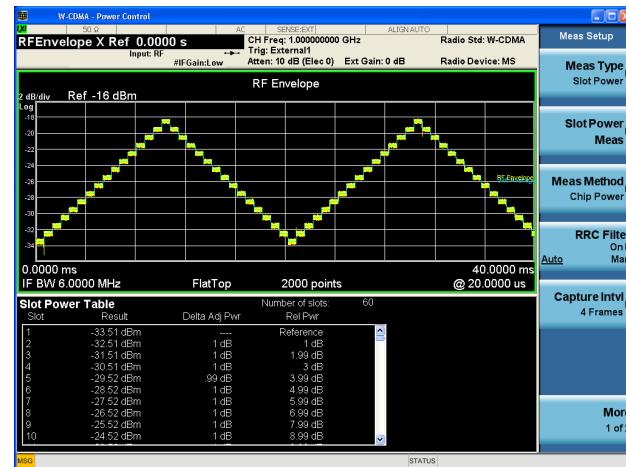


Figure 6. W-CDMA UL power control measurement

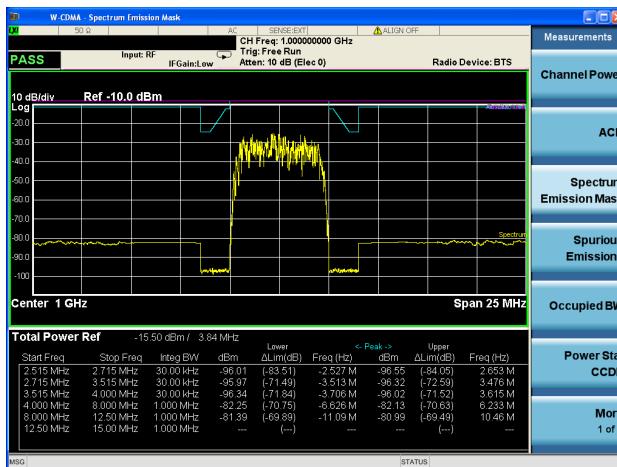


Figure 7. W-CDMA spectrum emissions mask measurement



Figure 8. HSUPA capture time summary showing error metrics for 15 consecutive slots

Measurement details for user equipment transmitter test

Table 5. One-button measurements for user equipment provided by the N9073EMOD measurement application

Technology	W-CDMA	HSUPA	HSPA+
Modulation accuracy			
Rho	●	●	●
RMS EVM	●	●	●
Peak EVM	●	●	●
Pk CDE	●	●	●
Pk active CDE	●	●	●
RMS mag error	●	●	●
RMS phase error	●	●	●
Freq error	●	●	●
I/Q origin offset	●	●	●
Time offset	●	●	●
Total power	●	●	●
Peak RCDE	●	●	●
QPSK EVM	●	●	●
Code domain power	●	●	●
Power control	●	●	●
PRACH power	●	●	●
Slot power	●	●	●
Slot phase	●	●	●
Channel power	●	●	●
ACP	●	●	●
Spectrum emission mask (SEM)	●	●	●
Spurious emissions	●	●	●
Occupied bandwidth	●	●	●
CCDF	●	●	●
Monitor spectrum	●	●	●
I/Q waveform	●	●	●

Single acquisition combined measurements

The N9073EMXD single acquisition combined W-CDMA measurement application is for high-speed manufacturing of W-CDMA mobile phone transmitters, wireless components, such as power amplifiers, and low-cost pico/femtocell base stations. Used with the MXA and EXA signal analyzers, it provides up to 20 times speed improvement compared to traditional one-button measurements for a combined W-CDMA ACP, modulation quality (Rho) and QPSK EVM.

Single Acquisition

Contains one continuous block of captured data collected using predefined capture settings.

Combined Measurements

Implies that the measurement sequence performed by the analyzer can accommodate any mix of transmitter power measurements and modulation quality measurements performed on the data collected within the capture period.

Key Specifications

Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence.
- Typical values are designated with the abbreviation "typ." These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation "nom." These values indicate expected performance, or describe product performance that is useful in the application of the product.

Note: Data subject to change

Description	PXA	MXA	EXA	CXA
Channel power				
Minimum power at RF input	-50 dBm (nom)	-50 dBm (nom)	-50 dBm (nom)	-50 dBm (nom)
	±0.61 dB	±0.82 dB	±0.94 dB	±1.33 dB
Absolute power accuracy (Atten = 10 dB)	(±0.19 dB 95th percentile)	(±0.23 dB 95th percentile)	(±0.27 dB 95th percentile)	(±0.61 dB 95th percentile)
Measurement floor	-85.8 dBm (nom)	-83.8 dBm (nom)	-79.8 dBm (nom)	-76.8 dBm (nom)
Adjacent channel power (ACPR, ACLR)				
Single carrier				
Minimum power at RF input	-36 dBm (nom)	-36 dBm (nom)	-36 dBm (nom)	-36 dBm (nom)
ACPR accuracy (RRC weighted, 3.84 MHz noise BW)				
Radio	Offset frequency			
UE	5 MHz (ACPR -30 to -36 dBc)	±0.08 dB	±0.14 dB	±0.22 dB
UE	10 MHz (ACPR -40 to -46 dBc)	±0.12 dB	±0.21 dB	±0.34 dB
BTS	5 MHz (ACPR -42 to -48 dBc)	±0.20 dB	±0.49 dB	±1.07 dB
BTS	10 MHz (ACPR -48 to -53 dBc)	±0.21 dB	±0.44 dB	±1.00 dB
BTS	5 MHz (-48 dBc with non-coherent ACPR)	±0.10 dB	±0.21 dB	±0.44 dB
				±0.87 dB
Dynamic range (RRC weighted, 3.84 MHz noise BW)				
Noise	Offset	Method		
correction	frequency			
Off	5 MHz	Filtered IBW	-80 dB (typ)	-73 dB (typ)
Off	5 MHz	Fast	-80 dB (typ)	-72 dB (typ)
Off	10 MHz	Filtered IBW	-87 dB (typ)	-79 dB (typ)
On	5 MHz	Filtered IBW	-83.5 dB (typ); -88 dB (nom)	-78 dB (typ)
On	10 MHz	Filtered IBW	-89.5 dB (typ)	-82 dB (typ)
				-76 dB (typ)
				-78 dB (typ)

Description	PXA	MXA	EXA	CXA
RRC weighting accuracy				
White noise in adjacent channel	0.00 dB (nom)	0.00 dB (nom)	0.00 dB (nom)	0.00 dB (nom)
TOI-induced spectrum	0.001 dB (nom)	0.001 dB (nom)	0.001 dB (nom)	0.001 dB (nom)
rms CW error	0.012 dB (nom)	0.012 dB (nom)	0.012 dB (nom)	0.012 dB (nom)
Multiple carriers (RRC weighted, 3.84 MHz noise BW)				
ACPR dynamic range (two carriers)				
5 MHz offset, noise correction (NC) on	-83 dB (nom), NC on	-70 dB (nom), NC off	n/a	n/a
ACPR accuracy (two carriers)				
5 MHz offset, noise correction on	±0.20 dB (nom)	±0.42 dB (nom)	n/a	n/a
ACPR dynamic range (four carriers)				
5 MHz offset, noise correction off (NFE off on PXA)	-69 dB (nom)	-64 dB (nom)	n/a	n/a
5 MHz offset, noise correction on	-79 dB (nom)	-72 dB (nom)	n/a	n/a
ACPR accuracy (four carriers, 5 MHz offset)				
BTS, incoherent TOI, ACPR range -42 to -48 dB				
5 MHz offset, noise correction off	±0.18 dB	±0.42 dB	n/a	n/a
5 MHz offset, noise correction on	±0.09 dB	±0.17 dB	n/a	n/a
Spectrum emission mask				
Dynamic range, relative 2.515 MHz offset	87.9 (92.6 dB typ)	81.9 (88.2 dB typ)	76.6 (83.8 dB typ)	73.4 (80.2 dB typ)
Sensitivity, absolute 2.515 MHz offset	-103.7 (-106.7 dBm typ)	-99.7 (-104.7 dBm typ)	-94.7 (-100.7 dBm typ)	-91.7 (-97.7 dBm typ)
Accuracy, 2.515 MHz offset				
Relative	±0.06 dB	±0.12 dB	±0.11 dB	±0.11 dB
Absolute (20 to 30 °C)	±0.62 dB (±0.20 dB 95% confidence)	±0.88 dB (±0.27 dB 95% confidence)	±1.15 dB (±0.31 dB 95% confidence)	±1.53 dB (±0.65 dB 95% confidence)
Spurious emissions				
Dynamic range, relative	88.8 (92.1 dB typ)	81.3 (82.2 dB typ)	76.9 (77.4 dB typ)	70.7 (75.9 dB typ)
Sensitivity, absolute	-88.4 (-91.4 dBm typ)	-84.4 (-89.4 dBm typ)	-79.4 (-85.4 dBm typ)	-76.5 (-82.5 dBm typ)
Accuracy (95% confidence; attenuation = 10 dB)				
Frequency range				
20 Hz to 3.6 GHz	±0.19 dB	±0.29 dB	±0.38 dB (9 kHz to 3.6 GHz)	±0.81 dB (100 kHz to 3.0 GHz)
3.5 GHz to 8.4 GHz	±1.08 dB	±1.17 dB	±1.22 dB (3.5 GHz to 7.0 GHz)	±1.80 dB (3.0 GHz to 7.5 GHz)
8.3 GHz to 13.6 GHz	±1.48 dB	±1.54 dB	±1.59 dB (6.9 GHz to 13.6 GHz)	n/a
Occupied bandwidth				
Minimum power at RF input	-30 dBm (nom)	-30 dBm (nom)	-30 dBm (nom)	-30 dBm (nom)
Frequency accuracy	±10 kHz (RBW = 30 kHz; number of points = 1001 span = 10 MHz)	±10 kHz (RBW = 30 kHz; number of points = 1001 span = 10 MHz)	±10 kHz (RBW = 30 kHz; number of points = 1001 span = 10 MHz)	±10 kHz (RBW = 30 kHz; number of points = 1001 span = 10 MHz)
Power statistics CCDF				
Histogram resolution	0.01 dB	0.01 dB	0.01 dB	0.01 dB

Code domain				
BTS measurements, -25 dBm ≤ mixer level ≤ -15 dBm, 20 to 30 °C				
Code domain power				
Absolute accuracy (95% confidence) (-10 dBc CPICH, Atten = 10 dB)	±0.25 dB	±0.25 dB	±0.32 dB	±0.61 dB
Relative accuracy				
CDP range between 0 and -10 dBc	±0.015 dB	±0.015 dB	±0.015 dB	±0.015 dB
CDP range between -10 and -30 dBc	±0.06 dB	±0.06 dB	±0.06 dB	±0.06 dB
CDP range between -30 and -40 dBc	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB
Power control steps accuracy				
CDP range between 0 and -10 dBc	±0.03 dB	±0.03 dB	±0.03 dB	±0.03 dB
CDP range between -10 and -30 dBc	±0.12 dB	±0.12 dB	±0.12 dB	±0.12 dB
Power dynamic range accuracy				
CDP range 0 to -40 dBc	±0.14 dB	±0.14 dB	±0.14 dB	±0.14 dB
Symbol power vs. time				
Relative accuracy				
CDP range between 0 and -10 dBc	±0.015 dB	±0.015 dB	±0.015 dB	±0.015 dB
CDP range between -10 and -30 dBc	±0.06 dB	±0.06 dB	±0.06 dB	±0.06 dB
vCDP range between -30 and -40 dBc	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB
Symbol error vector magnitude				
Accuracy for range between 0 and -25 dBc	±1.0% (nom)	±1.0% (nom)	±1.0% (nom)	±1.0% (nom)
Modulation accuracy (composite EVM)				
BTS measurements, -25 dBm ≤ mixer level ≤ -15 dBm, 20 to 30 °C				
Composite EVM range	0 to 25%	0 to 25%	0 to 25%	0 to 25%
Composite EVM floor	1.50%	1.50%	1.60%	1.6%
Composite EVM floor (with Option BBA)	±1.5% (nom)	±1.5% (nom)	n/a	n/a
Composite EVM accuracy	±1.0%, (±0.5% in the EVM range of 12.5% to 22.5%, no 16QAM nor 64QAM codes)	±1.0%, (±0.5% in the EVM range of 12.5% to 22.5%, no 16QAM nor 64QAM codes)	±1.0%, (±0.5% in the EVM range of 12.5% to 22.5%, no 16QAM nor 64QAM codes)	±1.0%, (±0.5% in the EVM range of 12.5% to 22.5%, no 16QAM codes)
Peak code domain error accuracy	±1.0 dB	±1.0 dB	±1.0 dB	±1.0 dB
I/Q origin offset, DUT maximum offset	-10 dBc (nom)	-10 dBc (nom)	-10 dBc (nom)	-10 dBc (nom)
I/Q origin offset, analyzer noise floor	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)
Frequency error range	±3 kHz (nom)	±3 kHz (nom)	±3 kHz (nom)	±3 kHz (nom)
Frequency error accuracy	±5 Hz + (transmitter frequency x frequency reference accuracy)	±5 Hz + (transmitter frequency x frequency reference accuracy)	±5 Hz + (transmitter frequency x frequency reference accuracy)	±5 Hz + (transmitter frequency x frequency reference accuracy)
Time offset				
Absolute frame offset accuracy	±20 nsec	±20 nsec	±20 nsec	±20 nsec
Relative frame offset accuracy	±5.0 nsec (nom)	±5.0 nsec (nom)	±5.0 nsec (nom)	±5.0 nsec (nom)
Relative offset accuracy (for STTD diff mode)	±1.25 nsec	±1.25 nsec	±1.25 nsec	±1.25 nsec

Power control

Using 5 MHz resolution BW

Absolute power measurement

Accuracy 0 to -20 dBm	±0.7 dB (nom)	±0.7 dB (nom)	±0.7 dB (nom)	±0.7 dB (nom)
Accuracy -20 to -60 dBm	±1.0 dB (nom)	±1.0 dB (nom)	±1.0 dB (nom)	±1.0 dB (nom)
Relative power measurement accuracy				
Step range ±1.5 dB	±0.1 dB (nom)	±0.1 dB (nom)	±0.1 dB (nom)	±0.1 dB (nom)
Step range ±3.0 dB	±0.15 dB (nom)	±0.15 dB (nom)	±0.15 dB (nom)	±0.15 dB (nom)
Step range ±4.5 dB	±0.2 dB (nom)	±0.2 dB (nom)	±0.2 dB (nom)	±0.2 dB (nom)
Step range ±26.0 dB	±0.3 dB (nom)	±0.3 dB (nom)	±0.3 dB (nom)	±0.3 dB (nom)

QPSK EVM

-25 dBm ≤ mixer level ≤ -15 dBm, 20 to 30 °C

EVM

Range	0 to 25% (nom)			
Floor	1.50%	1.50%	1.60%	1.6%
Accuracy	±1.0%	±1.0%	±1.0%	±1.0%
I/Q origin offset				
DUT maximum offset	-10 dBc (nom)	-10 dBc (nom)	-10 dBc (nom)	-10 dBc (nom)
Analyzer noise floor	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)	-50 dBc (nom)
Frequency error				
Range	±30 kHz (nom)	±30 kHz (nom)	±30 kHz (nom)	±30 kHz (nom)
Accuracy	±5 Hz + (transmitter frequency x frequency reference accuracy)	±5 Hz + (transmitter frequency x frequency reference accuracy)	±5 Hz + (transmitter frequency x frequency reference accuracy)	±5 Hz + (transmitter frequency x frequency reference accuracy)

For a complete list of specifications refer to the appropriate specifications guide.

PXA: www.keysight.com/find/pxa_specifications
 MXA: www.keysight.com/find/mxa_specifications
 EXA: www.keysight.com/find/exa_specifications
 CXA: www.keysight.com/find/cxa_specifications

PXIe:

VSA up to 6 GHz: www.keysight.com/find/m9391a
 VSA up to 50GHz: www.keysight.com/find/m9393a
 VXT: www.keysight.com/find/m9421a
 CXA-m: www.keysight.com/m9290a

Ordering Information

Flexible licensing and configuration

- **Perpetual:** License can be used in perpetuity.
- **Time-based:** License is time limited to a defined period, such as 12-months.
- **Node-locked:** Allows you to use the license on one specified instrument/computer.
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool.
- **Floating:** Allows you to access the license on networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased.
- **USB portable:** Allows you to move the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately.
- **Software support subscription:** Allows the license holder access to Keysight technical support and all software upgrades

You Can Upgrade!

All of our X-Series application options are license-key upgradeable.



W-CDMA/HSPA+ measurement application (N9073EMOD)

Model	Software License Type	Support Contract	Support Subscription (12-month) ²
N9073EMOD-1FP	Node-locked perpetual	R-Y5C-001-A ²	R-Y6C-001-L ²
N9073EMOD-1FL	Node-locked 12-month	R-Y4C-001-L ¹	Included
N9073EMOD-1TP	Transportable perpetual	R-Y5C-004-D ²	R-Y6C-004-L ²
N9073EMOD-1TL	Transportable 12-month	R-Y4C-004-L ¹	Included
N9073EMOD-1NP	Floating perpetual	R-Y5C-002-B ²	R-Y6C-002-L ²
N9073EMOD-1NL	Floating 12-month	R-Y4C-002-L ¹	Included
N9073EMOD-1UP	USB portable perpetual	R-Y5C-005-E ²	R-Y6C-005-L ²
N9073EMOD-1UL	USB portable 12-month	R-Y4C-005-L ¹	Included

One month software support subscription extensions³

Model	Description
R-Y6C-501 ³	1-month of software support subscription for node-locked license
R-Y6C-502 ³	1-month of software support subscription for floating license
R-Y6C-504 ³	1-month of software support subscription for transportable license
R-Y6C-505 ³	1-month of software support subscription for USB portable license

1. All time-based X-Series measurement application licenses includes a 12-month support contract which also includes the 12-month software support subscription as same duration.
2. Support contract must bundle software support subscription for all perpetual licenses in the first year. All software upgrades and Keysight support are provided for software licenses with valid support subscription.
3. After the first year, software support subscription may be extended with annual or monthly software support subscription extensions for perpetual licenses.

Try Before You Buy!

Evaluate a full-featured version of our X-Series measurement application with our **FREE** trial. Redeem one 30-day trial license of each measurement application online at: www.keysight.com/find/X-Series_apps_trial

Hardware Configurations

To learn more about compatible platforms and required configurations, please visit: www.keysight.com/find/X-Series_apps_platform

Software Models & Options

To learn more about X-Series measurement application licensing, model numbers and options, please visit:
www.keysight.com/find/X-Series_apps_model

Hardware Configuration

For optimizing the LTE and LTE-Advanced FDD/TDD measurement application, Keysight recommends a minimum level of instrument hardware functionality at each instrument performance point. Supported instruments include:

Benchtop:

- PXA N9030A
- EXA N9010A
- MXA N9020A
- CXA N9000A

PXIe:

- VSA (6 GHz) M9391A
- VXT M9420/21A
- VSA (50 GHz) M9393A
- CXA-m M9290A

N90x0A X-Series signal analyzer

Capability	Instrument Option	Benefit
Analysis bandwidth	10 or 25 MHz as default or higher	Required: Wider analysis bandwidth options such as 25/40/85/160 MHz can be selected depending on the specified signal analyzer model
Precision frequency reference	-PFR	Recommended: For enhanced frequency accuracy and repeatability for lower measurement uncertainty
Electronic attenuator	-EA3	Recommended: Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps
Pre-amplifier	3.6 GHz (-P03) or higher	Recommended: For maximizing the measurement sensitivity
Fine resolution step attenuator	-FSA	Recommended: Useful for maximizing useable dynamic range to see signals
Analog baseband I/Q inputs	-BBA on PXA and MXA only	Optional: To extend measurements at baseband if required by device under test

M9391/93A PXIe VSA vector signal analyzer

Description	Model-Option	Additional information
Frequency range 3 or 6 GHz	M9391A-F03, or F06	One required for M9391A
Frequency range 8.4, 14, 18, or 27 GHz	M9393A-F08, F14, F18, or F27	One required for M9393A
Frequency extension to 43.5 or 50 GHz	M9393A-FRZ or FRX	Optional (requires M9393A-F27)
Analysis bandwidth 40, 100 or 160 MHz	M9391A/M9393A-B04, B10 or B16	One required
Memory 128, 512 or 1024 MSa	M9391A/M9393A-M01, M05 or M10	One required
Frequency reference 10 MHz and 100 MHz	M9391A/M9393A-300	One required

M9420/21A PXIe VXT vector transceiver

Description	Model-Option	Additional information
Frequency range 3.8 or 6 GHz	M9420A/M9421A-504, or 506	One required
Analysis bandwidth 40, 80 or 160 MHz	M9420A/M9421A-B40/B80/B1X	One required
Memory 256 or 512 MSa	M9420A/M9421A-M02/M05	One required
Half duplex port	M9420A/M9421A-HDX	Optional
High output power	M9420A/M9421A-1EA	Optional

M9290A CXA-m PXIe signal analyzer

Description	Model-Option	Additional information
Frequency range 3, 7.5, 13.6 or 26.5 GHz	M9290A-F03, F07, F13, or F26	One required
Analysis bandwidth 25 MHz	M9290A-B25	Optional
Preamplifier, 3, 7.5, 13.6 or 26.5 GHz	M9290A-P03, P07, P13 or P26	One required
Fine resolution step attenuator	M9290A-FSA	Optional
Precision frequency reference	-PFR	Optional

Related Literature

Description	Publication number
N9073A & W9073A W-CDMA/HSPA/HSPA+ Self-Guided Demonstration	5990-5926EN
N9073A & W9073A W-CDMA/HSPA/HSPA+ Measurement Application Guide	N9073-90017
Designing and Testing 3GPP W-CDMA Base Transceiver Stations (Including Femtocells), Application Note 1355	5980-1239E
Designing and Testing 3GPP W-CDMA User Equipment, Application Note 1356	5980-1238E
Concepts of High Speed Downlink Packet Access: Bringing Increased Throughput and Efficiency to W-CDMA, Application Note	5989-2365EN
User's and Programmer's Reference Guide is available in the library section of the N9073A and W9073A product pages.	

Web

Product pages:

www.keysight.com/find/N9073D

X-Series measurement applications:

www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:

www.keysight.com/find/X-Series

PXIe VXT vector transceiver:

www.keysight.com/find/VXT

PXIe VSA vector signal analyzer

www.keysight.com/find/M9391A

www.keysight.com/find/M9393A

PXIe CXA-m signal analyzer:

www.keysight.com/find/m9290a


Application pages:

www.keysight.com/find/cellular

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

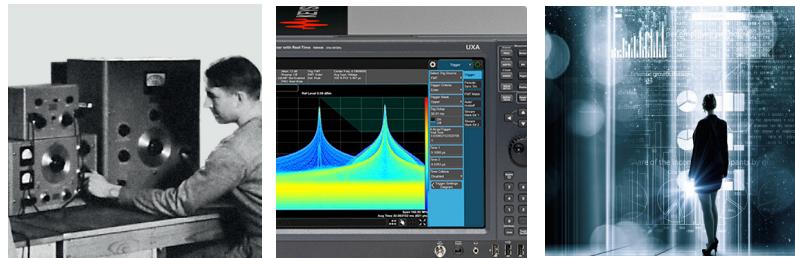

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/x-series
www.keysight.com/find/N9073D

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)


DEKRA Certified
ISO9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System