


Keysight Technologies N9070A Wideband Signal Analysis Solution

Technical Overview

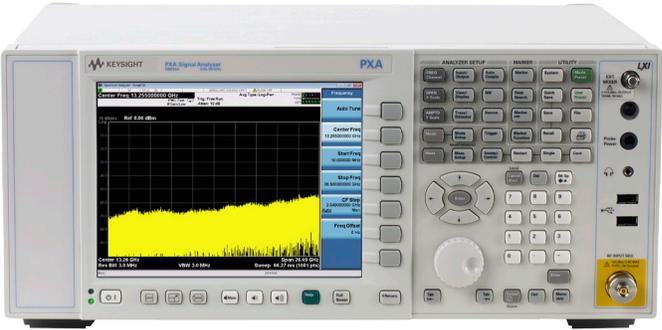

Introduction

Wideband commercial, satellite or radar signals can now be analyzed with commercial test equipment at a fraction of the cost and measurement time of traditional solutions using the N9070A wideband signal analysis solution. The Keysight Technologies, Inc. N9070A consists of Keysight's N9030A PXA signal analyzer, combined with an Infiniium DSO9204H oscilloscope and 89600 VSA software, orderable as N9070A-001.

The N9070A takes advantage of the PXA's wide IF output, the high dynamic range of the Infiniium oscilloscope, and the powerful 89600 VSA to deliver a wideband high-dynamic range signal analysis solution at an affordable price. This solution does not require a stimulus, the correction data is exported from the PXA to the 89600 VSA so the user does not need to do time consuming calibrations for acceptable measurement results. Correction data is quickly loaded when the user changes center frequency and span, and the full analysis capability of the 89600 VSA can then be taken advantage of. The corrections contain both amplitude and phase, which enables the 89600 VSA to make accurate wideband measurements such as analysis of chirp linearity, demodulation of cellular, emerging, or custom modulation formats.

Key Features:

- Automatically loads correction data from the PXA signal analyzer
- PXA correction data for > 1 GHz of bandwidth
- Measurement characteristics including frequency response and phase linearity performance up to 800 MHz of bandwidth
- Includes high dynamic range scope with up to 12 bits of resolution
- Quick setup and measurements
- Frequency coverage to 50 GHz

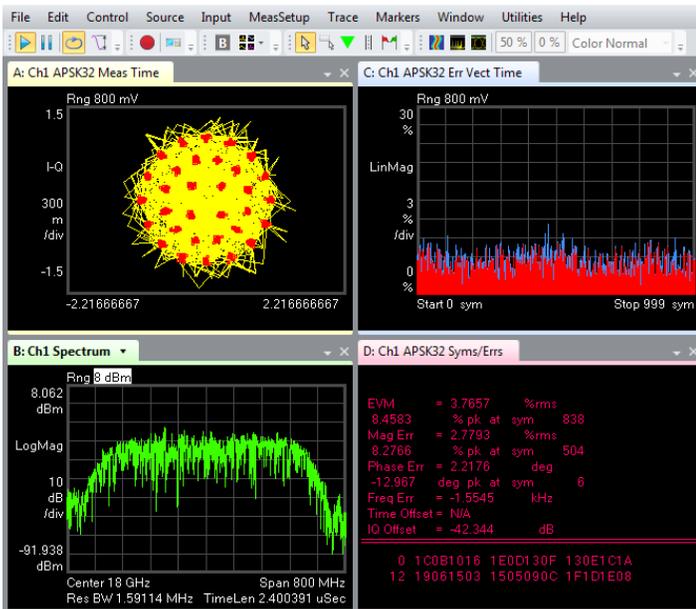


Figure 1. Demodulation of a wideband APSK signal without using equalization. Note the EVM at around 3.75%. The source has an expected EVM performance of > 2%.

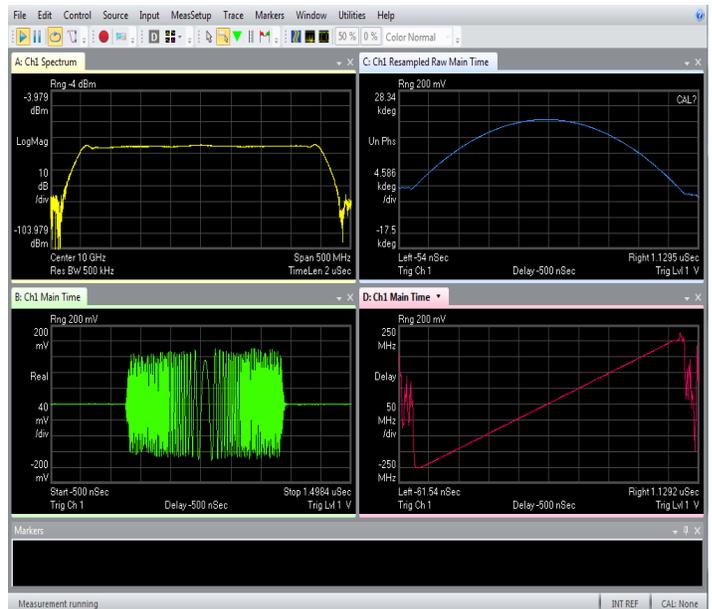


Figure 2. Analysis of a wideband chirp and evaluation phase and frequency across the band.

89600 VSA software

The 89600 VSA software is a comprehensive set of tools for demodulation and vector signal analysis.

- Gain greater insight with high resolution FFT-based spectrum, time and modulation domain analysis
- Capture and playback signals for detailed gap-free analysis
- Vector measurements for RADAR/EW
- Over 75 signal standards and modulation types, including:
 - Cellular communications: LTE-Advanced, W-CDMA, HSPA+, GSM/EDGE Evolution, TD-SCDMA, cdma2000®
 - Wireless connectivity: WLAN 802.11a/b/g/n/ac, WiMAX™, Bluetooth®, Zigbee, RFID
 - Aerospace, defense, satellite: AM, FM, PM, BPSK, QPSK, QAM, APSK, FSK, VSB, SOQPSK, APCO 25
 - Custom modulation: evaluate non-standard or proprietary OFDM and APSK signals

Keysight's high dynamic range oscilloscopes bring 12-bit digitizer performance, enabling the N9070A to attain results similar to an integrated signal analyzer. Measurements such as error vector magnitude are accurate due to both sets of correction data and the performance of the digitizer. The 89600 VSA can run inside the scope, giving the user a large screen display to view an extensive amount of measurement views.

The N9070A is an easy-to-use solution. Setup is done in a few simple steps and using the integrated software component in the VSA, switching measurement parameters is fast and straightforward. Using an Ethernet cable between the PXA and scope enables the 89600 VSA to load correction data and set up the measurement; the user does not have to interact between the signal analyzer or the scope interface.

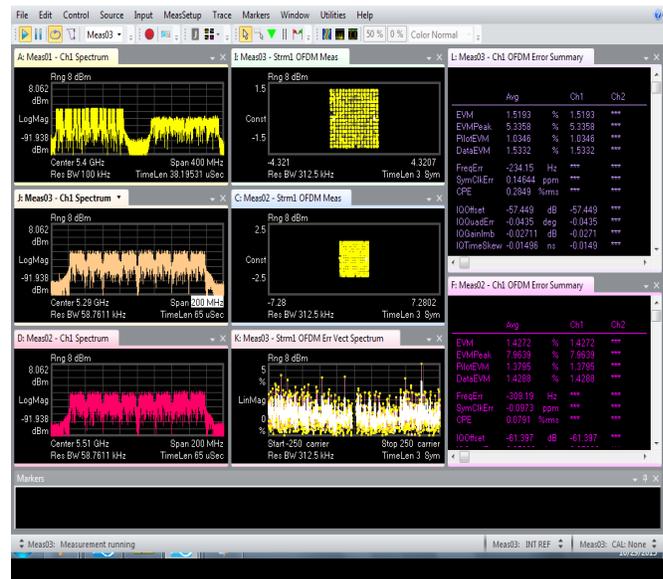


Figure 3. The N9070A is downconverting two 802.11ac signals (160 MHz bandwidth each) that are adjacent to each other. The 89600 VSA has multi-measurement capability to analyze both signals simultaneously. Note span of 400 MHz.

The N9070A allows for a flexible measurement capability without sacrificing usability. Bandwidth, center and IF frequencies can be selected by the user and the software automatically loads the appropriate correction data. When signal recording is required, using the N9070A allows for much longer record lengths due to the use of the downconverter. The recorded waveform data can be analyzed using the 89600 VSA or easily exported to MATLAB or other popular formats.

The PXA can also be used to do traditional swept measurements such as spur search or occupied bandwidth. All of the X-Series measurements such as noise figure and phase noise are also available. The PXA correction data are complex (both magnitude and phase) and can be used with many of the digitizers supported by the 89600 VSA. The Infiniium oscilloscope also offers multi-channel analysis.

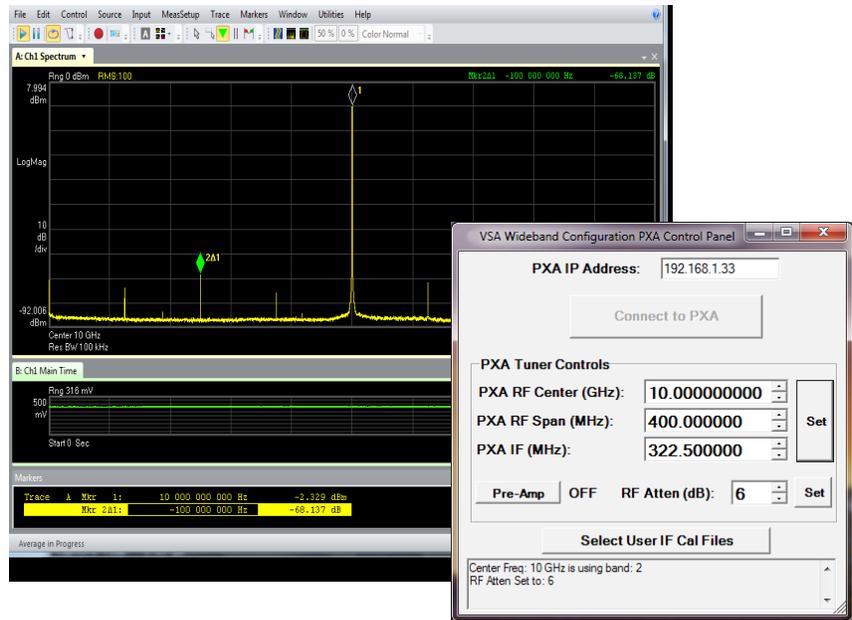


Figure 4. The downconverter control window and a spurious measurement of the N9070A which is > 67 dBc.

The DS09204H oscilloscope has been configured for the N9070A but it is possible to choose other digitizers such as the Infiniium 90000 Series oscilloscopes or modular digitizers such as the M9703A. Viewing dynamic range performance of other digitizers can be seen in that product's datasheet. Ordering each item individually will not limit correction functionality.

Characteristics

The following data represents nominal characteristics not tested over temperature. The instrument(s) used had the IF characterized, using family corrections will likely have degraded performance (see box-box variation). These characteristics are for the following hardware configurations unless otherwise noted: N9030A (Options 526, MPB, CR3), MSO9404A. Using a higher sample rate lower noise digitizer can lead to better performance and this configuration should work with digitizers supported by the 89600 VSA software. Preselector has been bypassed for measurement results shown. Other measurement factors such as aliasing and images should be taken into consideration. The PXA can act as an anti-aliasing filter, although this has not been fully characterized.

Spurious response	Spurious signal content will likely be dominated by the oscilloscope and the characteristics of spur free dynamic range will nominally be reviewed in this document. The PXA general spurious responses will not be addressed in this document.
Displayed average noise level (DANL)	DANL characteristics will vary based on carrier frequency and the contribution will be from both the PXA and scope. Please review the PXA specification guide and 9000 series data sheet.
Third-order intermodulation (TOI)	This product can create additional TOI products outside of the noted TOI specifications in the N9030A specification guide; this is not specified for the N9070A.
Phase noise	Phase noise should not degrade significantly.
Absolute amplitude accuracy	Amplitude accuracy can vary significantly more than the internal (Option B1X) digitizer but the relative frequency response should exhibit behavior as listed from the IF frequency response table in this document.

General specifications



More information on each product can be found in the N9030A specification guide or the Infiniium 9000 H-Series data sheet.

Oscilloscope/digitizer	DS09204H	Use MSO9404A if frequency coverage from 2 to 3.6 GHz is needed.
Bandwidth	2 GHz	Useful for direct measurement. Using the downconverter, corrections are limited to 1.2 GHz (see correctable bandwidth below).
Bits of resolution	12 bit (< 500 MHz)	10 bit (< 2 GHz) Please consult the H-Series datasheet for more information.
Memory (standard)	10 Mpts	
Signal analyzer/downconverter	N9030A	Bandwidth is limited on other X-Series instruments and correction data will not export.
Frequency range	3.6 to 50 GHz	Option N9030A-550. Measurements below 3.6 GHz are in band 0 and will be limited to < 160 MHz of BW; for wider bandwidths go directly into the scope. There are no auto-corrections needed for band 0.
Correctable bandwidth	1.2 GHz	IF output frequency must be at least 20 MHz; suggested start of IF is 100 MHz. Corrections are significant over 1 GHz and performance degrades. Suggested usable bandwidth is < 1 GHz.
Spur-free dynamic range		
Less than 400 MHz bandwidth	-65 dBc	Single tone in center of span; center frequency ≥ 3.6 , ≤ 26.5 . Performance differs based on IF frequency.
Less than 800 MHz bandwidth	-61 dBc	Single tone in center of span; center frequency ≥ 3.6 , ≤ 26.5 . Performance differs based on IF frequency.
Less than 1000 MHz bandwidth	-56 dBc	Single tone in center of span; center frequency ≥ 3.6 , ≤ 26.5 . Performance differs based on IF frequency.

IF frequency response^{1,2}

Center Frequency < 26.5 GHz

Less than 400 MHz bandwidth	± 0.8 dB	See the graphs for measured results across frequency bands.
Less than 800 MHz bandwidth	± 1.5 dB	See the graphs for measured results across frequency bands.
Less than 1000 MHz bandwidth	± 2.2 dB	See the graphs for measured results across frequency bands.

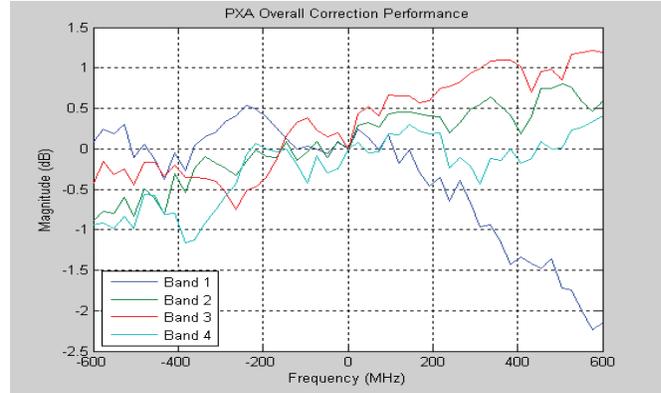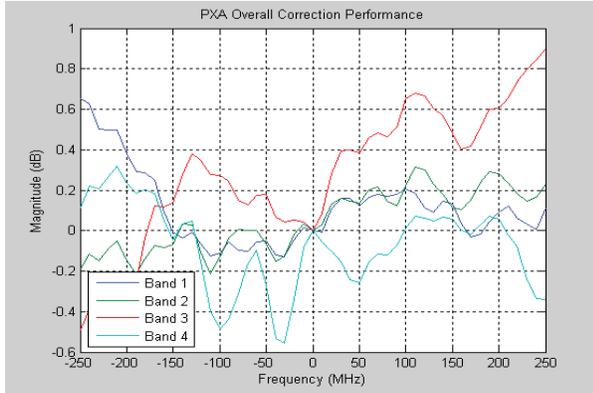

Center Frequency < 50 GHz

Less than 400 MHz bandwidth	± 2.0 dB	Using N9030A (550, MPB, CR3).
Less than 800 MHz bandwidth	± 3.5 dB	Using N9030A (550, MPB, CR3).
Less than 1000 MHz bandwidth	± 4 dB	Using N9030A (550, MPB, CR3).

IF phase linearity^{1,2}

Center frequency ≥ 3.6 GHz, < 18 GHz	RMS
Less than 400 MHz bandwidth	3°
Less than 800 MHz bandwidth	5.5°

Corrections range

Understanding the amplitude correction range for the digitizer gives a general idea on impact to dynamic range. These are worst case measurements; the maximum needed corrections.

	Peak-to-peak	
400 MHz	5 dB	Worst case for either 26.5 or 50 GHz hardware.
800 MHz	12 dB	Worst case for either 26.5 or 50 GHz hardware.
1200 MHz	16 dB	Worst case for either 26.5 or 50 GHz hardware.

1. The IF frequency response includes effects due to RF circuits such as input filters that are a function of RF frequency, in addition to the IF pass-band effects.

2. Not including moding issues above 18 GHz.

Deviation using Family Cal

The corrections for N9070A have two components — RF and IF. This section describes the IF correction deviation from one instrument to the next. Users can choose to include a specific box measurement IF calibration (used in previous data) or use the family correction. RF calibration component is comprised of data that is always box specific; the software will automatically take that correction data from the PXA (requires firmware > A.14.00). IF corrections are the dominate of the two sets of corrections.

	Frequency response	Phase linearity
26 GHz instruments (800 MHz Bandwidth)		
Band 1	0.2 dB	4°
Band 2	0.2 dB	2.5°
Band 3	0.3 dB	5°
Band 4	0.2 dB	5°
50 GHz instruments (800 MHz Bandwidth)		
Band 1	0.3 dB	5°
Band 2	0.4 dB	3.5°
Band 3	0.5 dB	4.5°
Band 4	0.8 dB	5°
Band 5	0.5 dB	4.5°
Band 6	0.2 dB	3.5°

Note: The maximum amplitude variation for full corrections (1.2 GHz) is 2.5 dB. Maximum phase deviation for full corrections (1.2 GHz) is 15°. The dominate phase deviation for full corrections (BW < 1.2 GHz) occurs within the last 50 MHz of the measurement.

For More Information

N9070A Wideband signal analysis solution: www.keysight.com/find/wideband

N9030A PXA X-Series signal analyzer: www.keysight.com/find/PXA

Infiniium DS09204H oscilloscope: www.keysight.com/find/DSO9204H

89600 VSA software: www.keysight.com/find/89600

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.axiestandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000 is a US registered certification mark of the Telecommunications Industry Association.

WiMAX is a US trademark of the WiMAX Forum.

Bluetooth and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc., U.S.A. and licensed to Keysight Technologies, Inc.

www.keysight.com/find/wideband

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-07-10-14)

