

# Keysight DSOX6JITTER

## Jitter Analysis Option

For InfiniiVision 6000 X-Series Oscilloscopes

Data Sheet





## Introduction

As data rates continue to increase in today's state-of-the-art high-speed digital designs, timing budgets are decreasing. Ensuring that high-speed clocks and serial data signals are valid and stable when receivers sample data often requires an understanding of the effects of the various components of jitter that may contribute to decreased valid data windows. With the DSOX6JITTER jitter analysis option, the InfiniiVision 6000 X-Series oscilloscope can perform various types of jitter analysis measurements with multiple views and quantization of jitter to provide you with valuable insight into the source of unwanted timing errors. The Keysight Technologies, Inc. InfiniiVision 6000 X-Series oscilloscope with the DSOX6JITTER jitter analysis option is the lowest priced oscilloscope jitter analysis test solution in the market today.

## Features

- Serial data TIE jitter measurements
- Clock jitter measurements including: clock TIE, N period, period to period, +width to +width, -width to -width, and duty cycle
- Various clock recovery algorithms including: constant/fixed clock, 1st order phase-locked loop (PLL) with loop bandwidth, and 2nd order PLL with loop bandwidth and damping factor
- Various views/plots of jitter including: jitter histogram, jitter trend, jitter spectrum, and jitter statistics
- Color-graded real-time eye with automatic eye-opening measurements

## Types of Jitter Analysis

There are various types of jitter analysis measurements that can be selected and performed using the DSOX6JITTER jitter analysis option. Jitter on clock signals can be measured either relative to a software-based recovered ideal clock or relative to selected cycles of the clock signal itself. Jitter measurements on serial data signals, which are sometimes referred to as Time Interval Error (TIE), can be performed relative to either an explicit reference clock or software-based recovered clock.

Figure 1 shows the InfiniiVision 6000 X-Series oscilloscope jitter analysis selection/setup menu. The following table summarizes the various types of jitter analysis that can be selected and performed using the DSOX6JITTER option licensed on an InfiniiVision 6000 X-Series oscilloscope.



Figure 1. InfiniiVision 6000 X-Series oscilloscope jitter analysis setup menu.

### Clock jitter measurements

Clock TIE	Measures timing error of selected edges (rising, falling, or both) of the input clock signal relative to a recovered ideal clock.
N period	Measures the time-span of N consecutive periods of the clock based on the selected edge (rising or falling). Then, it shifts ahead by one period and measures the time-span of the next N consecutive periods, and so on. For example, if N = 3, then jitter = $(T_1 + T_2 + T_3)$ , $(T_2 + T_3 + T_4)$ , $(T_3 + T_4 + T_5)$ , etc.
Period to period	Measures the time difference of successive periods (or groups of periods if N > 1) of the input clock signal on the selected edge (rising or falling). If N = 1, which is sometimes referred to as cycle-to-cycle jitter, then jitter = $T_2 - T_1$ , $T_3 - T_2$ , $T_4 - T_3$ , etc. If N = 3, then jitter = $(T_4 + T_5 + T_6) - (T_1 + T_2 + T_3)$ , $(T_5 + T_6 + T_7) - (T_2 + T_3 + T_4)$ , etc.
+Width to +width	Measures the time difference of successive positive pulse widths of the input clock signal ( $^+PW_{n+1} - ^+PW_n$ ).
-Width to -width	Measures the time difference of successive negative pulse widths of the input clock signal ( $^-PW_{n+1} - ^-PW_n$ ).
+Duty cycle	Measures the duty cycle of every cycle of the input clock signal.

### Serial data jitter measurements

Data TIE	Measures timing error of all edges of the input serial data signal relative to either a recovered ideal clock or an explicit input clock signal.
----------	--

## Views/Plots of Jitter Measurements

Various views/plots of jitter, as well as statistical results of jitter measurements, can be selected to help provide insight into the distribution and source of timing errors including the following:

- Jitter histogram
- Jitter trend
- Jitter spectrum
- Jitter statistics
- Real-time eye

Figure 2 shows an example of a serial data TIE measurement with a jitter histogram plot and jitter trend plot. The histogram shows the probability distribution function (PDF) of accumulated timing errors along with numerical statistics of measured jitter. The jitter trend plot shows timing error of each serial data edge time-correlated to the input data signal (yellow trace) that is under test. In other words, the jitter trend waveform plots timing error on the vertical axis (sec/div) versus time on the horizontal axis.

Figure 3 shows an example of a serial data TIE measurement with the jitter spectrum view along with a jitter trend plot. The jitter spectrum is actually a Fast Fourier Transform (FFT) waveform math operation performed on the jitter trend waveform data. This view of jitter can often times help identify periodic components of jitter as illustrated in this jitter measurement example. Also available are frequency-domain search features to automatically identify peak frequencies. Note that although they not shown, all three views of jitter analysis (histogram, trend, and spectrum) and can be selected and viewed simultaneously.



Figure 2. Jitter analysis with the jitter histogram and jitter trend views of timing errors.

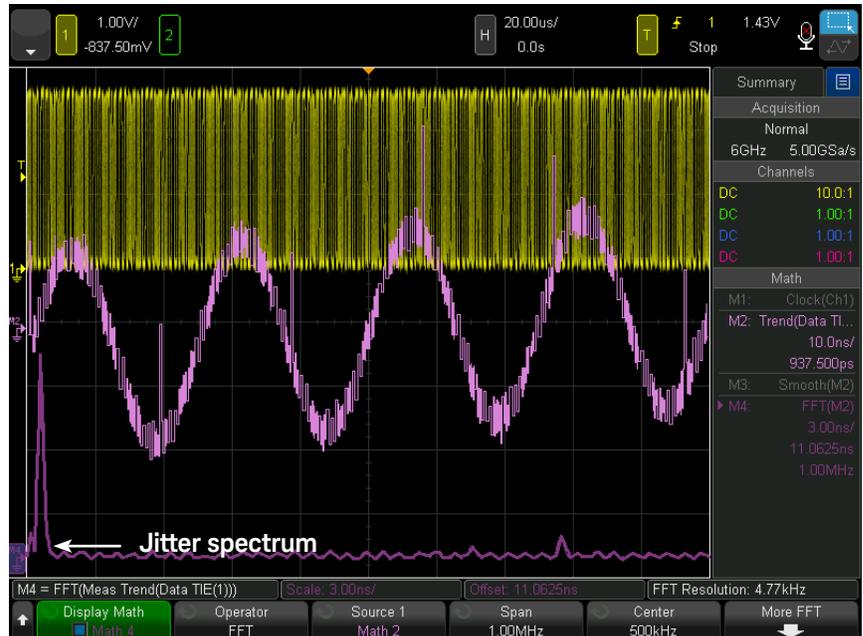


Figure 3. Jitter analysis with the jitter spectrum and jitter trend views of timing errors.

## Views/Plots of Jitter Measurements (continued)

In addition to viewing jitter in histogram, trend, and spectrum views, the InfiniiVision 6000 X-Series oscilloscopes can also display a color-graded Real-Time Eye (RTE) of serial data signals as shown in Figure 4. A real-time eye is an overlay of all bits to show worst-case timing (jitter) and worst-case noise relative to a recovered or explicit clock. With a real-time eye display, it is easy to observe the valid data window present at the input of receivers, along with automatic eye opening measurements (eye height and eye width).

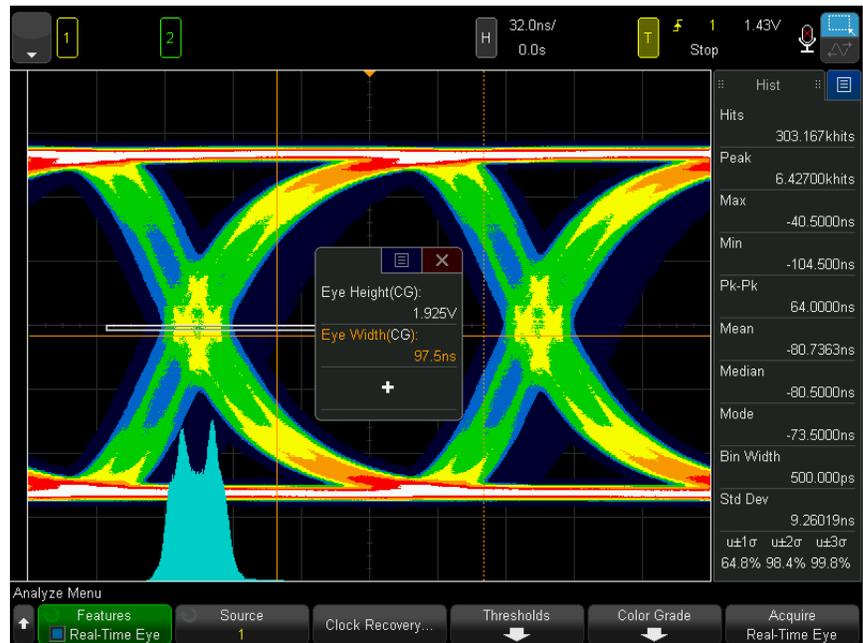


Figure 4. The color-graded real-time eye waveform shows worst-case data valid window (eye-opening).

## Clock recovery for jitter measurements

Clock and serial data TIE jitter measurements are performed on all captured edges based on the selected transition(s) relative to either an explicit input reference clock signal or a software-based recovered clock (sometimes referred to as clock data recovery (CDR)). Creating real-time eye displays also requires a recovered clock to use as a reference for slicing the captured serial data waveform into individual Unit Internals (UIs) for overlapping/folding. Since most of today's serial bus signals don't have explicit clocks (clocks are typically embedded in the data signal), software-based clock recovery is required to extract the clock from the data. Figure 5 shows a zoomed-in view of a serial data input (yellow trace), a recovered clock waveform (upper purple trace), and a TIE trend waveform (lower purple trace). TIE (jitter) measurements are performed on each transition of the serial data signal relative to the mid-point of the closest recovered clock, and then these measurement results are plotted as the TIE (jitter) trend waveform.

The DSOX6JITTER jitter analysis option provides the following software-based clock recovery algorithms:

- Constant/fixed clock
- 1<sup>st</sup> order PLL clock with user-specified loop bandwidth/cut-off frequency
- 2<sup>nd</sup> order PLL clock with user-specified loop bandwidth and damping factor
- Explicit clock (captured/not recovered)



Figure 5. Software-based clock recovery provides a reference waveform for performing TIE jitter measurements.

## Probing Differential Clock and Serial Bus Data Signals

Most of today's higher-speed digital designs are based on differential signaling. If direct 50- $\Omega$  cabling from the measurement source to the oscilloscope is not possible, then a differential probe must be used. Keysight recommends the N2750A InfiniiMode Series differential active probes (1.5 to 6 GHz bandwidth models) shown in Figure 6.

The InfiniiMode Series probe allows you to view not only the differential signal, but you can also select to view each side of a differential signal (high-side and low-side) bus relative to ground, as well as the common mode of the bus – without ever moving probe connections.

The InfiniiMode differential active probe comes standard with multiple probe heads for various probing use-models including solder-in, socketed, and browser. This probe also has a high-intensity LED headlight to make it easier to connect to fine-pitch devices.



Figure 6. Keysight's InfiniiMode N2750A Series differential active probe.

### Features and characteristics

Data jitter measurements	Data TIE
Clock jitter measurements	Clock TIE N period Period to period +Width to +width -Width to -width Duty cycle
Jitter views	Histogram Trend Spectrum Statistics Real time eye (color-graded)
Clock recovery	Explicit Constant/fixd 1 <sup>st</sup> order PLL with user-specified loop bandwidth/cut-off frequency 2 <sup>nd</sup> order PLL with user-specified loop bandwidth/cut-off frequency and damping factor

## Ordering Information

The DSOX6JITTER jitter analysis option is compatible on all InfiniiVision 6000 X-Series oscilloscope models with bandwidths ranging from 1 to 6 GHz and real-time sampling up to 20 GSa/s. Refer to the InfiniiVision 6000 X-Series oscilloscope data sheet for ordering information about specific oscilloscope models and other licensed options.


## Related Literature

Publication title	Publication type	Publication number
InfiniiVision 6000 X-Series Oscilloscopes	Data sheet	5991-4087EN
N2750A InfiniiMode Series Differential Active Probe	Data sheet	5991-0560EN
Jitter Analysis using Keysight's InfiniiVision 6000 X-Series and Infiniium Series Oscilloscopes	Application note	5991-4000EN
Finding Sources of Jitter with Real Time Jitter Analysis	Application note	5988-9740EN

To download these documents, insert the publication number in the URL: <http://literature.cdn.keysight.com/litweb/pdf/xxxx-xxxxEN.pdf>

## Product web site


For the most up-to-date and complete application and product information, please visit our product Web site at: [www.keysight.com/find/6000X-Series](http://www.keysight.com/find/6000X-Series)

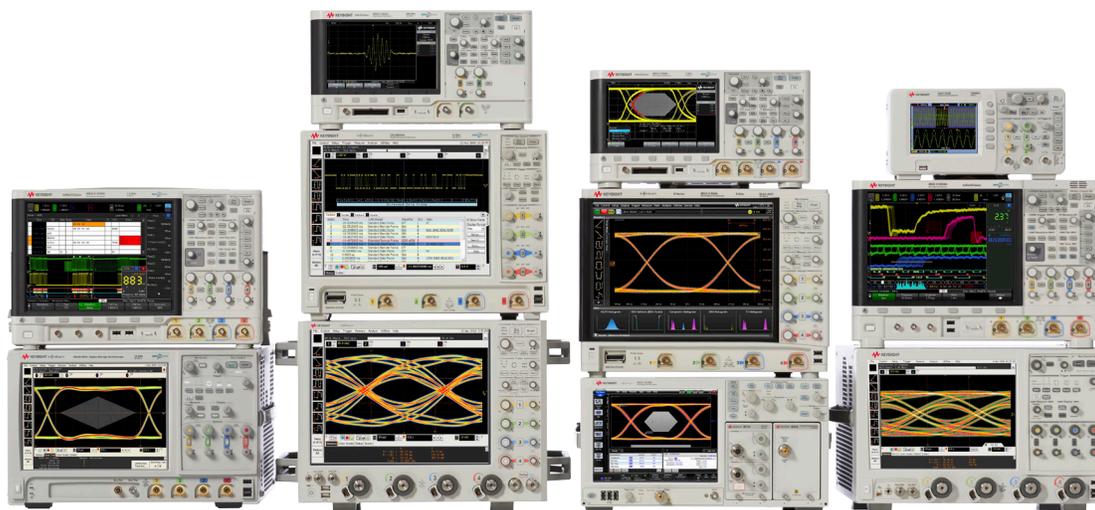

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

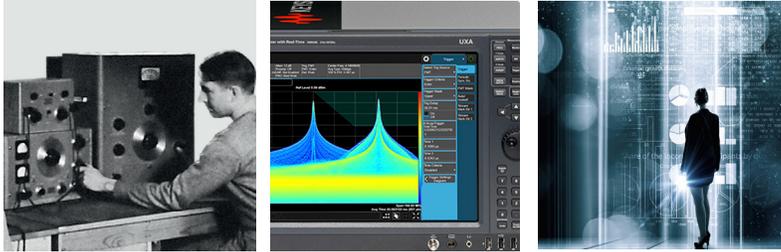

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.

#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

[www.keysight.com/find/6000X-Series](http://www.keysight.com/find/6000X-Series)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
(BP-9-7-17)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System

