

Keysight Technologies

InfiniiVision 7000B Series Oscilloscopes

Engineered for the best signal visibility

Data Sheet




If You Haven't Purchased A Keysight Scope Lately, Why Should You Consider One Now?

Oscilloscopes are visual tools and larger, high-resolution displays have become increasingly important as general purpose scopes need more space to display digital and serial signals in addition to traditional scope channels.

Wonder why? Keysight Technologies, Inc. engineers developed the InfiniiVision 7000B Series with advanced technology that will allow you to see more subtle signal detail and more infrequent events than any other scope on the market. See the InfiniiVision 7000B Series oscilloscope.

There is no better way to experience the superiority of the InfiniiVision 7000B Series scopes than to see it. Contact Keysight today to request an evaluation.

Or visit:
www.keysight.com/find/7000B

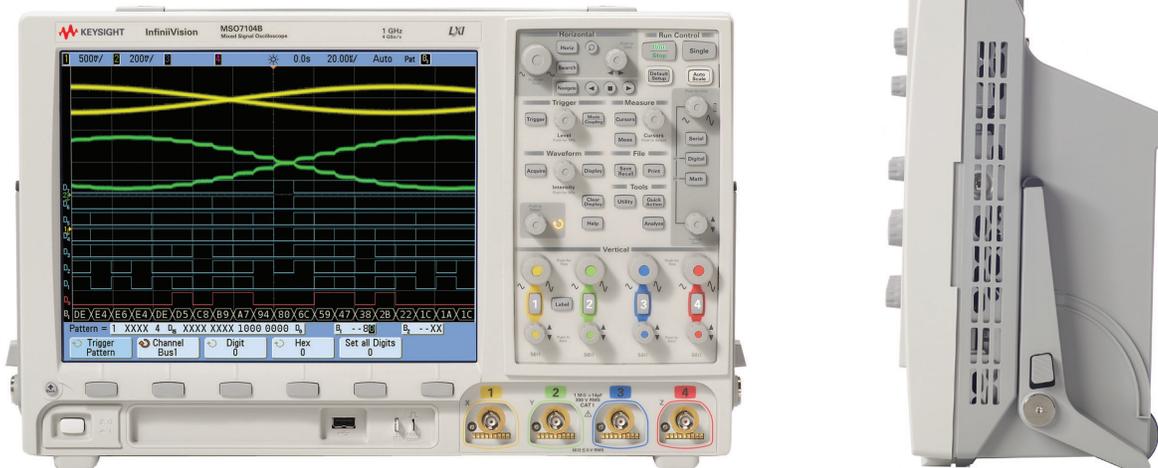

The InfiniiVision 7000B Series offers bandwidths up to 1 GHz. Each model, equipped with a large 12.1" XGA LCD display, comes in a whisper-quiet package that is just 6.5" deep and weighs only 13 pounds.

Model	Bandwidth	Sample rate	Memory	Scope channels	Digital channels	Update rate
DS07012B	100 MHz	2 GSa/s	8 Mpts	2	16	Up to 100,000 deep-memory waveforms per second, even with deep memory, digital channels and serial decode turned on.
DS07014B				4		
MS07012B				2		
MS07014B				4		
DS07032B	350 MHz	2 GSa/s	8 Mpts	2	16	
DS07034B				4		
MS07032B				2		
MS07034B				4		
DS07052B	500 MHz	4 GSa/s	8 Mpts	2	16	
DS07054B				4		
MS07052B				2		
MS07054B				4		
DS07104B	1 GHz	4 GSa/s	8 Mpts	4	16	
MS07104B				4		


Choose from fourteen InfiniiVision 7000B Series models. Keysight provides an easy 5-minute DSO-to-MSO upgrade kit for previously purchased 7000 Series DSOs.

What Gives the InfiniiVision 7000B Series the Best Signal Visibility?

1. Biggest display


Oscilloscopes are visual tools and larger, high-resolution screens make the product better. Bigger displays have become increasingly important as general purpose scopes need more space to display digital waveforms and serial decode traces in addition to traditional analog waveforms.

The 12.1-inch display size helps you easily view up to 20 channels simultaneously with serial protocol.

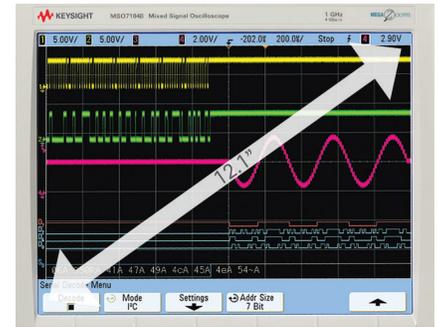

2. Fastest architecture

See a display more representative of the actual signals under test. The InfiniiVision 7000B Series shows jitter, infrequent events, and subtle signal detail that other scopes miss. Turn knobs and the instrument responds instantly and effortlessly. Need to also view digital channels? The instrument stays responsive. Decoding serial packets? Offering the industry's only hardware-accelerated serial bus decode, Keysight's InfiniiVision series delivers serial debug without compromising analog measurements.

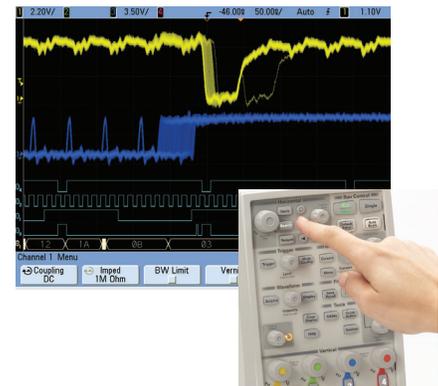

InfiniiVision scopes incorporate acquisition memory, waveform processing, and display memory in an advanced 0.13 μ ASIC. This patented 3rd generation technology, known as MegaZoom III, delivers up to 100,000 waveforms (acquisitions) per second with responsive deep memory always available.

3. Insightful applications

Customize your general purpose scope. A wide range of application packages provide meaningful insight into your application-specific problems. (See pages 8 to 9 and 13 to 14 for more detail.)

Serial with hardware-accelerated decode

- I²C, SPI
- CAN/LIN
- RS-232/UART
- I²S
- Mask testing
- Core-assisted FPGA debug
- Segmented memory
- Vector signal analysis
- DSO/MSO offline analysis
- Power measurement
- Secure environment
- MIL-STD-1553
- FlexRay

Your Design Has Analog, Digital and Serial Signals ... Shouldn't Your Scope?

The InfiniiVision 7000B Series scope channels provide faster identification of your most elusive problems

Revolutionary high-resolution display

Engineered with an XGA display and 256 levels of intensity grading, see a precise representation of the analog characteristics of the signals you're testing. Equipped with the industry's fastest uncompromised update rate at 100,000 waveforms/sec update rate, you'll capture critical signal detail and see infrequent events that traditional scopes miss.

MegaZoom III technology

MegaZoom III responsive deep memory captures long, non-repeating signals and maintains high sample rates, allowing you to quickly zoom in on areas of interest. Sample rate and memory depth go hand-in-hand. Deep memory in oscilloscopes sustains a high sample rate over longer time spans.

Capture a mix of analog or digital signals. Compare multiple cycles of digital signals with slower analog signals

16 high-speed timing channels with up to 2 GSa/s deep memory

Use the timing channels to evaluate control signal relationship. Or capture and view data buses up to 16 bits wide. Trigger on and display individual signals or bus waveforms in hex or binary.

Mixed signal trigger

Trigger across any combination of analog and digital signals simultaneously. See precise analog measurements timed with exact digital content, all in one instrument.

Applications for digital channels

Designing with Altera or Xilinx FPGAs? Use the FPGA dynamic probe for rapid internal FPGA measurements. Using I²C, SPI, or RS-232? Use the analog or digital signals from a 4-channel model to acquire and decode these serial buses.

Capture long streams of serial data and gain fast insight into your problems. Keysight 7000B Series oscilloscopes provide the best serial protocol capabilities in their class

Serial bus triggering and decoding

Display responsive, on-screen decode of serial bus traffic. Isolate specific events with pinpoint accuracy. Show decode to validate serial bus activity in real time.

Quickly find infrequent errors

Hardware-accelerated decoding increases the scope's probability of capturing communication errors. Keysight oscilloscopes can help you catch that intermittent problem before it becomes an intermittent customer complaint or quality concern.

Easily capture enough serial data to see all of the details


Use deep memory to capture serial data stream over a long period of time.

Listing display window


Shows two views of the serial decoded data, a serial decode trace that is time-correlated to the waveform and "list" view of each field and packet.

Search through deep memory acquisitions of serial data faster than was ever possible before


Save Debug with automatic Search and Navigate capability. Navigate through the serial data holding direct time-alignment to captured waveforms by simply turning the selection knob to easily correlate the decoded packet to the waveform.

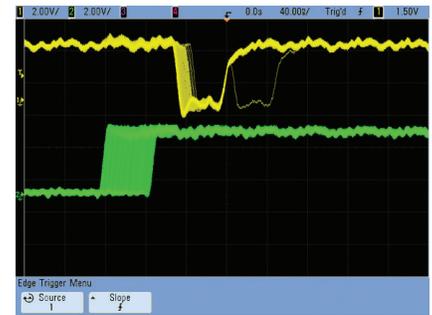


Analog: Up to 1 GHz bandwidth and up to 4 GSa/s sample rate.

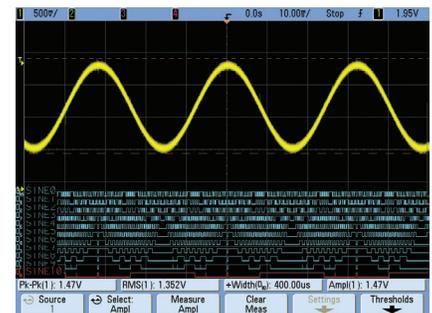

Digital: 16 digital timing channels with mixed signal triggering.

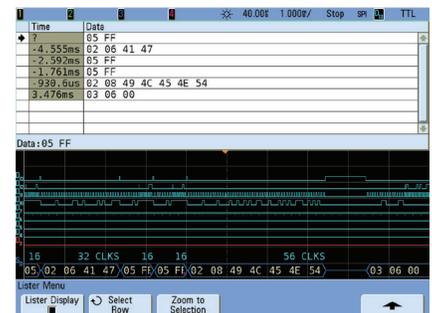

Serial: Hardware-accelerated decode and trigger for I²C, I^S, SPI, RS-232, CAN, LIN, FlexRay, and Mil-STD 1553.

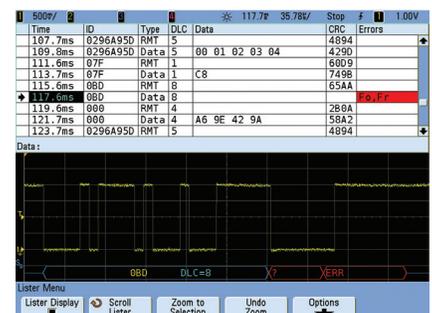

Serial Search and Navigate.

Other Useful Features

Navigate through the captured waveform

Automatically marks each frame in the selected search criteria. Use the dedicated front panel navigation keys to automatically jump to the next or previous marked frame or play through the entire waveform with control to stop, rewind or adjust the speed of waveform scrolling.

High resolution mode

Offers up to 12 bits of vertical resolution. This is accomplished by serially filtering sequential data points and mapping the filtered results to the display when operating at time base settings greater than 10- μ s/div.

Help is at your fingertips

An embedded help system – available in 11 languages – gives you quick answers if you don't understand a feature. Simply press and hold the corresponding front-panel key, and a screen pops up to explain its function.

Waveform math with FFT

Analysis functions include subtract, multiply, integrate, square root, and differentiate, as well as fast Fourier transforms (FFT).

Peak detect

250 ps on 500-MHz and 1-GHz models, 500 ps on 350-MHz models. Helps you find narrow glitches.

AutoProbe interface

Automatically sets probe attenuation factors and provides power for selected active probes, including the award-winning 1130A 1.5-GHz InfiniiMax differential active probe and 1156A 1.5-GHz single-ended active probe systems.

5-digit hardware counter

Measures frequency up to the bandwidth of the scope and provides accurate and repeatable results. Can be increased to 8 digits with an external 10 MHz reference.

Trig out and reference clock in/out

Provides an easy way to synchronize your scope to other instruments. Use the Trig Out port to connect your scope to a frequency counter for more accurate frequency measurements or to cross trigger other instruments.

Autoscale

Displays all analog and digital active signals, and automatically sets the vertical, horizontal and trigger controls.

23 automatic measurements with statistics

Get up to 4 simultaneous measurements with 5 additional statistics beyond the current value. Fast update rate provides statistical data for enabled measurements such as mean, min, max, standard deviation and count. Pressing [QuickMeas] brings up the last four automated measurements selected. Cursors automatically track the most recently selected measurement.

Analog HDTV/EDTV trigger

The 7000B Series comes standard with analog HDTV/EDTV triggering for standards like 1080i, 1080p, 720p and 480p as well as standard video triggering on any line within a field, all lines, all fields and odd or even fields for NTSC, SECAM, PAL and PAL-M video signals.

Bus mode display (on MSO models)

Quick and easy read-out of hexadecimal or binary representation of logic signals.


Easy software upgrades

System software is stored in flash ROM that can be upgraded from the scope's built-in USB port or LAN. You can find the latest system and IntuiLink software at: www.keysight.com/find/7000Bsw

Dedicated Front Panel Key




Simply press the dedicated front panel Search Key and enter a variety of specific search criteria.

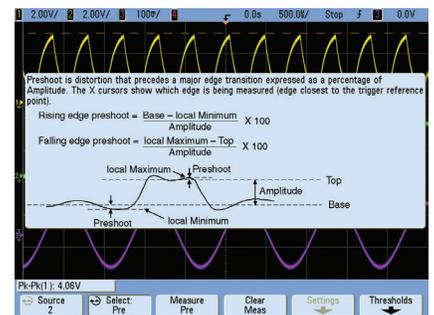

Press and hold a key for instant help.



Measurement statistics allow you to have confidence in your measurements. Statistics can show that a measurement is not only correct at one moment, but that it has stabilized and has a low variance over time, giving it a higher statistical validity.

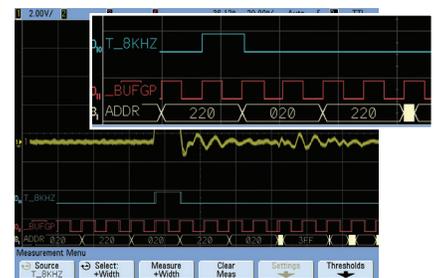

Digital signals can be displayed individually or as overlaid bus values.

Why Does a Fast Update Rate Matter?

While bandwidth, sample rate and memory depth are key criteria for deciding which scope to purchase, an equally important characteristic is update rate.

What is update rate?

Update rate is how many waveform acquisitions per seconds your scope can acquire, process, and display. Oscilloscope “dead-time” is the time it takes for a scope to process and then display an acquired waveform before re-arming its triggering for the next acquisition. For traditional scopes, this time is often orders of magnitude greater than acquisition time on fast time-per-division settings.

If a glitch occurs during the scope’s dead-time, it won’t be captured. The key to improving the probability of capturing a signal anomaly during the scope acquisition time is to minimize dead-time.


Oscilloscope vendors usually specify what their scope’s “best-case” waveform update rates are. Some scope architectures suffer from factors that can seriously degrade the “best-case” update rates spec. Keysight’s 7000B Series architecture delivers the fastest update rate when using:

- Analog channels
- Analog and digital
- Deep memory
- Serial decode


Why is update rate important?

1. Certainty. Fast waveform update rates improve the scope’s probability of capturing random and infrequent events.
2. Responsiveness. If you rotate the timebase control, you expect the oscilloscope to respond immediately – not seconds later after the scope finishes processing data.
3. Signal detail. Fast waveform update rates improve the display quality of the waveform that you see on screen.


Update rates directly affect a scope probability of capturing and displaying infrequent and random events. Slow update rates will cause a scope to miss subtle or infrequent signal details.

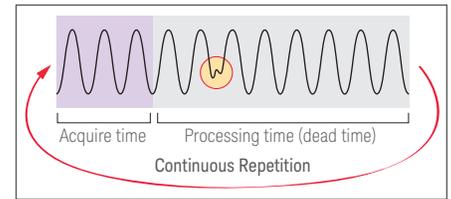

Improves instrument responsiveness.

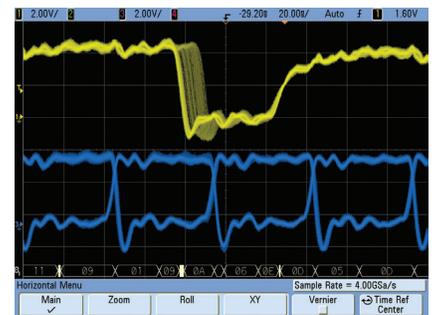


Improves scope display quality.

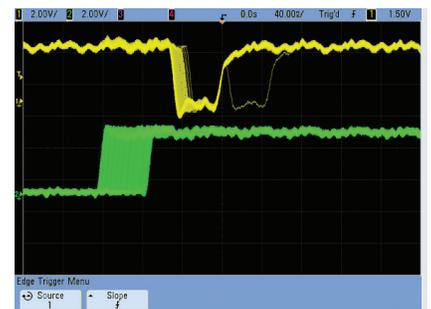

Improves probability of capturing infrequent events.

How Update Rate Affects Signal Visibility

Capturing random and infrequent events on an oscilloscope is all about statistical probabilities. The key to improving the probability of capturing a signal anomaly is to minimize dead-time and take more pictures of the signal in a given timeframe. Here is an example with Tek and Keysight scopes both connected to a target with a glitch that occurs 25 times per second.

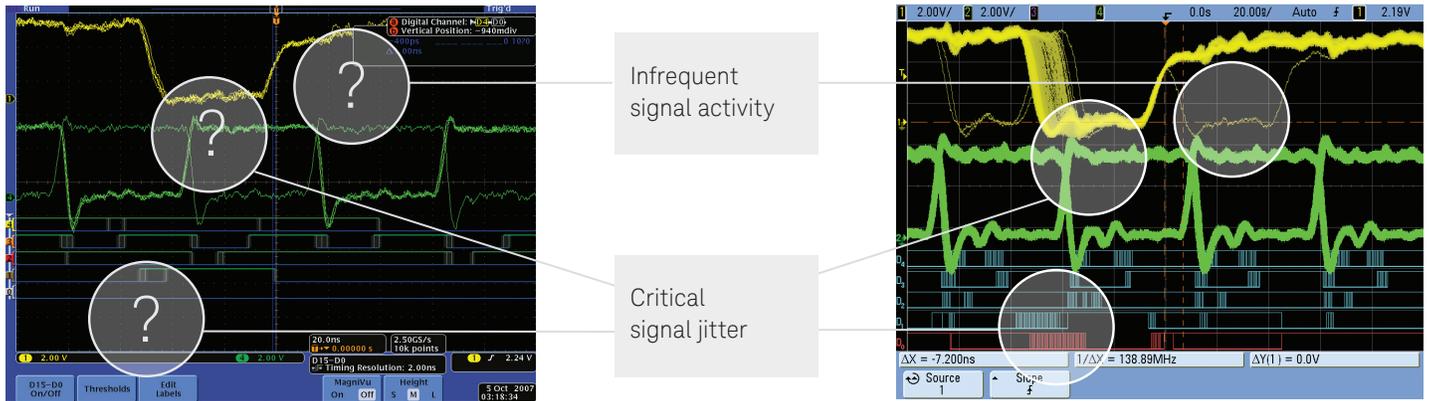

Tek MSO4104

- Product data sheet: 50,000 waveforms per second.
- Update rate = 18 waveforms per second with 10 Mpts and digital channels turned on. Resulting measurement shown.
- Probability of capturing the infrequent glitch = 0.09% after running for 10 seconds.
- Average time to capture just one glitch = 128 minutes.

Keysight MS07104B

- Product data sheet: 100,000 waveforms per second.
- Update rate = 95,000 waveforms per second with auto memory and digital channels turned on. Resulting measurement shown.
- Probability of capturing the infrequent glitch = 99% after running for 10 seconds.
- Average time to capture just one glitch = 1.5 seconds.

	Memory ¹		Scope settings			Measured update rates		
	Tek		Timebase setting	Digital channels	Serial decode	TEK MS04104A ²	LeCroy WR 104Xi	Keysight MS07104B
Initial setup	10 Kpts		20 ns/div	-	-	55,000	27	95,000
Change timebase	10 Kpts		10 ns/div	-	-	2,700	27	60,000
Add digital channels	10 Kpts		20 ns/div	On	-	125	27	95,000
Increase memory setting	10 Mpts		20 ns/div	On	-	35	27	95,000
Turn on serial decode	10 Mpts		20 ns/div	On	On	0.2	25	95,000

1. Keysight and LeCroy memory depth selection was automatically selected. Memory depth = display window times sample rate with up to 8 Mpts for Keysight.
 2. Tek measurements taken with version 2.13 firmware.

Seeing subtle signal detail and infrequent events requires a scope with fast waveform update rates. Don't take a scope vendor's banner waveform update rate specification at face value. Test it yourself. It's actually pretty easy to characterize a scope's update rate. Run a moderately fast signal (e.g. 50 MHz) into a scope channel. Measure the scope's average trigger output signal frequency. This is your scope's update rate for the specified timebase setting. Test the update rate of the scope under various setup conditions. Setup conditions that Keysight suggests varying include timebase range, memory depth, and number of channels, including analog, digital, as well as channels assigned for serial decoding.


Software Applications

Mask testing (N5455A or Option LMT)

Keysight's mask test option (Option LMT or N5455A) for InfiniiVision Series oscilloscopes provides a fast and easy way to test your signals to specified standards, and uncover unexpected signal anomalies, such as glitches. Mask testing on other oscilloscopes is based on software-intensive processing technology, which tends to be slow.

Keysight's InfiniiVision scopes can perform up to 100,000 real-time waveform pass/fail tests per second. This provides testing throughput significantly faster than other mask test solutions, making valid pass/fail statistics available almost instantly.

For more information: www.keysight.com/find/masktest

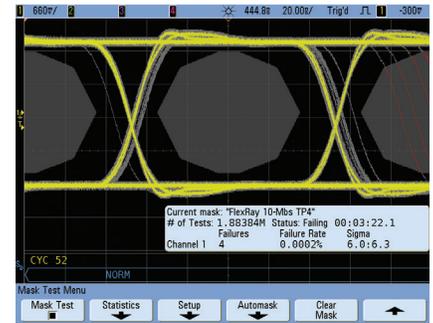


Mask testing uncovers an infrequent signal anomaly.

Segmented memory (N5454A or Option SGM on new scope purchases)

Segmented memory optimizes available memory for data streams that have long dead times between activity. The application excels at analyzing signal activity associated with laser pulses, serial buses, and bursty signals such as radar.

View an overlay of all signal segments, including MSO channels and serial decode, while highlighting the current segment. Quickly move between segments to view signal detail associated with a specific segment.

For more information: www.keysight.com/find/segmented

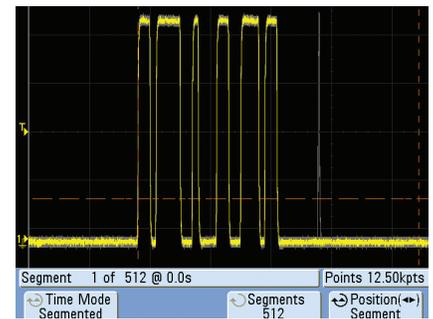

Use segmented memory to optimize available memory.

I²C/SPI serial trigger and decode (N5423A or Option LSS on new scope purchases)

This application displays real-time time-aligned decode of I²C and SPI serial buses. Hardware-accelerated decode means the scope stays responsive and fast.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of the scope or logic acquisition channels.

For more information: www.keysight.com/find/I2C-SPI



View on-screen serial decode of an I²C packet.


RS-232/UART serial decode and trigger (N5457A or Option 232 on new scope purchases)

Does your design include RS-232 or another type of UART? This application eliminates the need to manually decode bus traffic. Using data captured on the scope or logic channels, the application lets you easily view the information sent over a RS-232 or other UART serial bus.

Display real-time time-aligned decode of transmit and receive lines. The application also enables triggering on RS-232/UART conditions.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of the scope or logic acquisition channels.

For more information: www.keysight.com/find/RS-232

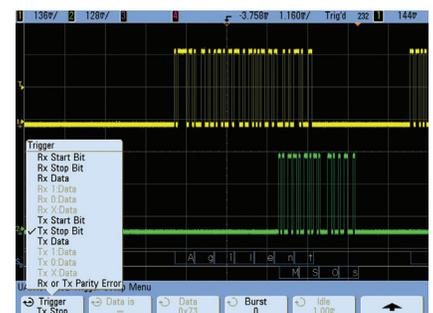

Trigger on and decode RS-232/UART transmission.

Software Applications (Continued)

CAN/LIN triggering and decode (N5424A or Option AMS on new scope purchases)

Trigger on and decode serially transmitted data based on CAN and LIN protocols. This application not only provides triggering on complex serial signals, but it also provides unique hardware-accelerated capabilities. Hardware-accelerated triggering and decode means the scope stays responsive and fast.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of scope or logic acquisition channels.

For more information: www.keysight.com/find/CAN-LIN




Trigger on and decode CAN serial packets.

FlexRay Measurements (N5432C or Option FLX on new scope purchases)

Trigger on and time-correlate FlexRay communication with physical layer signals. With Keysight’s unique hardware-accelerated decoding, it provides the fastest decode update rates in the industry while the scope remains responsive and fast. Also included with this option is FlexRay eye-diagram mask testing and physical layer conformance test solution.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of scope or logic acquisition channels.

For more information: www.keysight.com/find/flexray

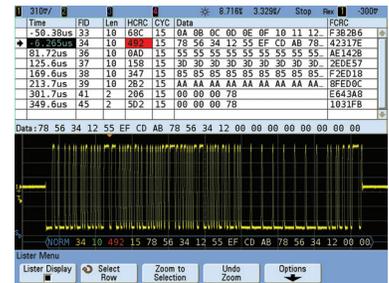


Time-correlated display of the FlexRay physical layer signal with protocol decoding.

I²S triggering and decode (Option SND or N5468A)

Find and debug intermittent errors and signal integrity problems faster on I²S audio protocol devices. This application offers powerful triggering and our unique hardware-accelerated decode and lister window so you can more easily find errors you could miss using other serial bus decode tools.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of scope or logic acquisition channels.

For more information: www.keysight.com/find/I2S

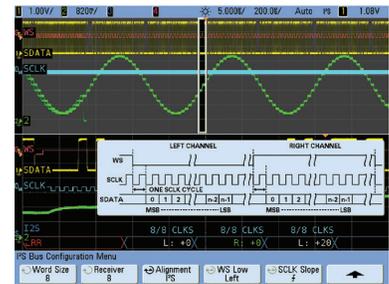


On-screen serial decode of an SPI packet.

MIL-STD 1553 Serial Trigger and Decode (N5469A or Option 553 on new scope purchase)

This application provides integrated MIL-STD 1553 serial bus triggering, hardware-based decoding, and eye-diagram mask testing to help you debug and characterize the electrical/physical layer of MIL-STD 1553 serial buses faster than with traditional “bit-counting” methods.

This application requires a 4-channel DSO or 4-channel MSO and can use any combination of scope or logic acquisition channels.

For more information: www.keysight.com/find/1553

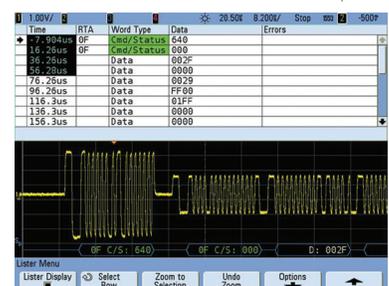

Time-correlated display of the MIL-STD 1553 physical layer signal with protocol decoding.

FPGA dynamic probe application (N5406A for Xilinx, N5434A for Altera)

Give your MSO internal FPGA visibility. Keysight’s MSO FPGA dynamic probe provides internal FPGA visibility and quick instrument setup using an innovative core-assisted debug approach. Measurement tasks that previously took hours can be done in a few mouse clicks. In a few seconds, easily measure a different set of internal signals without changing your FPGA design.

For more information:

www.keysight.com/find/7000-altera

www.keysight.com/find/7000-xilinx



Debug and validate your FPGA designs faster and more effectively.

Software Applications and Other Accessories

Power application (U1881A)

Need to make power measurements with your scope? Keysight's power application provides a full suite of power measurements that run on a PC connected to an InfiniiVision 7000B Series oscilloscope. Make more accurate power supply efficiency measurements by using an U1880A deskew fixture to deskew your voltage and current probes.

For more information: www.keysight.com/find/power-app



Use your scope to quickly make and analyze power measurements.

Vector signal analysis software (89601A)

Expand the measurement capability of your scope with the 89601A vector signal analysis software. This advanced DSP-based software takes the digitized signal data provided by the scope and provides FFT-based spectrum analysis and wide bandwidth digital modulation analysis for wireless communication signals like WCDMA and cdma2000, and wireless networking signals like 802.11 WiFi and 802.16 WiMax™.

Take advantage of the super wide bandwidth of your scope to capture and evaluate radar signals.

For more information: www.keysight.com/find/7000-vsa




Expand the capability of your scope with 89601A vector analysis software.

Offline viewing and analysis (B4610A)

Need to view and analyze scope data away from your scope? Need to share measurement data with geographically dispersed team members? Save your scope data to a USB or network drive and import the data into a PC-based offline viewer. Pan and zoom.

Use searching and filtering to gain insight on analog and digital buses. Email the data to team members who can use the same tool at their PCs.

For more information: www.keysight.com/find/InfiniiVisionOffline

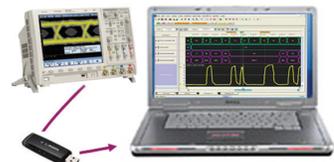


View and analyze previously acquired scope data on a PC-based offline tool.

Secure environment mode (Option SEC)

Option SEC – secure environment mode provides the highest level of security by ensuring internal nonvolatile memory is clear of all setup and trace settings in compliance with National Industrial Security Program Operation Manual (NISPOM) Chapter 8 requirements. When this option is installed, it will store setup and trace settings to internal volatile memory only.

Volatile memory will be cleared during the power off cycle of the instrument. So you can move the instrument out of a secure area with confidence.

For more information: *Option SEC Secure Environment Mode Option for Keysight 7000B Series Oscilloscopes - Data Sheet*

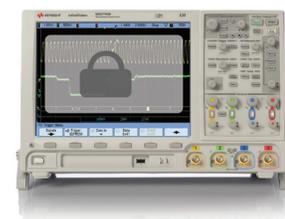

Secure environment mode ensures non-volatile memory is cleared on power off.

Evaluation kit (N2918A)

The evaluation kit includes a variety of signals that demonstrate MegaZoom III technology with its fast deep memory, superior waveform update rate, high definition display and mixed analog, digital and serial abilities.


Using this scope evaluation kit along with the easy-to-follow user's guide, you can quickly become familiar with how to effectively operate an InfiniiVision 7000B Series scopes.



The evaluation kit helps you discover the power of InfiniiVision 7000B Series oscilloscopes.

Probes and Accessories

Keysight offers a complete family of innovative passive and active probes for the InfiniiVision 7000B Series scopes helps you get your job done easily and accurately. Choosing the correct probe for your application will help to ensure you accurately acquire signals. Below is a general guide on how to choose the type of probe. For the most up-to-date information about Keysight's accessories, please visit our Web site at www.keysight.com/find/scope_probes.

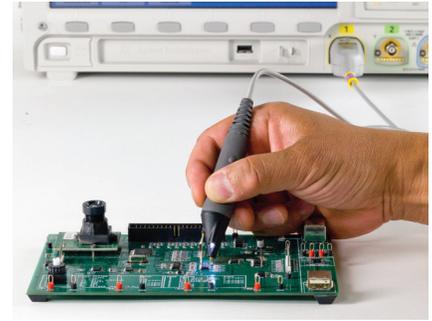

Probe type	Key characteristics
Passive probes: Most common type of probe, rugged and economical with bandwidth generally lower than 500 MHz	
10070C	1:1 20 MHz with probe ID
10073D	10:1 500 MHz with probe ID (standard with 350 MHz to 1 GHz models)
10074D	10:1 150 MHz with probe ID (standard with 100 MHz models)
N2871A	10:1 150 MHz passive probe with probe ID (optional with 100 MHz models)
N2873A	10:1 500 MHz with probe ID (optional with 350 MHz to 1 GHz models)
High voltage passive probe: View up to 30 kVDC + peak AC voltage referenced to earth ground	
10076B	100:1, 4 kV, 250 MHz probe with ID
N2771A	1000:1, 30 kV, 50 MHz probe
Single-ended active probes: Contains small, active amplifier and enables the probe input capacitance to be very low resulting in high input impedance on high frequencies. Least intrusive of all probes.	
N2795A	1 GHz with AutoProbe interface, head light and 1 M Ω input Z
N2596A	2 GHz with AutoProbe interface, head light and 1 M Ω input Z
1156A	1.5 GHz with AutoProbe interface
1144A	800 MHz (requires 1142A – power supply)
1145A	750 MHz 2-ch (requires 1142A – power supply)
Active differential probes: Use to look at signals that are referenced to each others instead of earth ground and to look at small signals in the presence of large DC offsets or other common mode signals such as power line noise.	
1130A	1.5 GHz InfiniiMax amplifier with AutoProbe interface (requires one or more InfiniiMax probe head – E2675A, E2668A, E2669A)
N2790A	100 MHz, 1.4 kV high-voltage differential probe with AutoProbe interface
N2791A	25 MHz, 700 V high-voltage differential probe (battery or USB powered)
N2792A	200 MHz, \pm 20 V differential probe (battery or USB powered)
N2793A	800 MHz, \pm 15 V differential probe (battery or USB powered)
N2891A	70 MHz, \pm 7 kV differential probe (battery or USB powered)
Current probes: Sense the AC or DC current flowing through a conductor and convert it to a voltage that can be viewed and measured on an oscilloscope. Compatible with 1 MΩ scope input.	
1146A	100 kHz, 100 A, AC/DC
1147B	50 MHz, 15 A, AC/DC with AutoProbe interface
N2893A	100 MHz, 15 A, AC/DC with AutoProbe interface
N2780A	2 MHz, 500 A, AC/DC (use with N2779A power supply)
N2781A	10 MHz, 150 A, AC/DC (use with N2779A power supply)
N2782A	50 MHz, 30 A, AC/DC (use with N2779A power supply)
N2783A	100 MHz, 30 A, AC/DC (use with N2779A power supply)
MSO probes: Offer the best performance and access to the industry's broad range of logic analyzer probing accessories	
01650-61607	With this 40-pin logic cable, Keysight MSOs accept numerous logic analyzer accessories such as Mictor, Samtec, flying leads or soft touch connectorless probes.
54620-68701	Included with all MSO models is a logic probe with 2x8 flying leads (includes 20 IC clips and five ground leads)

For more comprehensive information, refer to the Keysight 5000, 6000 and 7000 Series Oscilloscopes Probes and Accessories Data Sheet (with Keysight lit number 5968-8153EN).

Connectivity

The 7000B Series scopes come with the most comprehensive connectivity tools in their class

LXI class C

LAN eXtensions for Instrumentation (LXI) is a standards-based architecture for test systems. By specifying the interaction of system components, LXI enables fast and efficient test system creation and reconfiguration. The 7000B Series oscilloscopes follow specified LAN protocols and adhere to LXI requirements such as a built-in Web control server, IVI-COM driver, and easy-to-use SCPI commands. The standard Keysight I/O Library Suite makes it easy to configure and integrate instruments in your system.

IntuiLink toolbars and IntuiLink Data Capture


IntuiLink gives you a quick way to move oscilloscope screen shots and data into Microsoft Word and Excel. These toolbars can be installed from www.keysight.com/find/intuilink.

View Scope logic analyzer and oscilloscope correlation


View Scope enables simple and free time-correlated measurements between a 7000B Series oscilloscope and a Keysight 16900, 16800, 1690, or 1680 Series logic analyzer. Scope and logic waveforms are integrated into a single logic analyzer waveform display for easy viewing analysis – all with a simple point-to-point LAN connection. You can also cross-trigger the instruments, automatically de-skew the waveforms, and maintain marker tracking between the instruments.

National Instrument drivers

InfiniiVision 7000B Series oscilloscopes are supported by LabVIEW plug-and-play and IVI-C drivers.

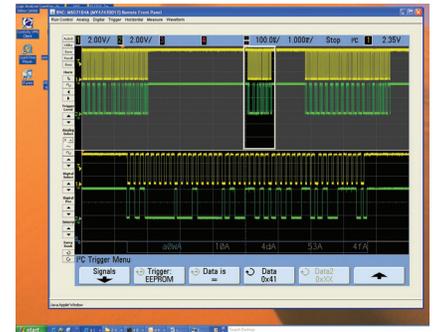

Keysight Remote Front Panel running in a Web browser.

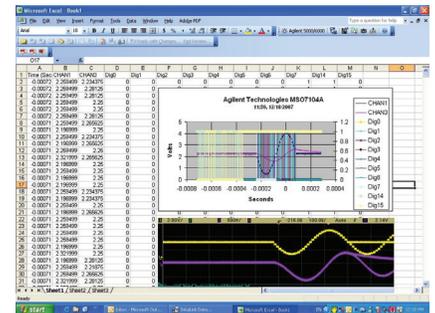


Use IntuiLink to import scope screen shots and data into Microsoft Word and Excel.




Use ViewScope to time-correlate oscilloscope and logic analyzer measurements.

Keysight InfiniiVision Portfolio

Keysight's InfiniiVision lineup includes 2000X, 3000X, 6000, and 7000B Series oscilloscopes. These share a number of advanced hardware and software technology blocks. Use the following selection guide to determine which scope best matches your specific needs.



	Ideal for ATE rackmount applications	Largest display, shallow depth	4 instruments in 1 for the same price	Only economy scope with mixed signal capability
Bandwidth	6000L Series	7000B Series	3000 X-Series	2000 X-Series
70 MHz bandwidth	—	—	—	●
100 MHz bandwidth	●	●	●	●
200 MHz bandwidth	—	—	●	●
350 MHz bandwidth	●	●	●	—
500 MHz bandwidth	●	●	●	—
1 GHz bandwidth	●	●	—	—
MSO models	●	●	●	●
GPIB connectivity	●	—	●	●
Rackmount height	1U	7U	5U	5U
Display size	—	12.1"	8.5"	8.5"
Footprint (W x H x D)	15.2" x 7.4" x 6.9"	17.9" x 10.9" x 6.8"	14.9" x 8.1" x 5.6"	14.9" x 8.1" x 5.6"

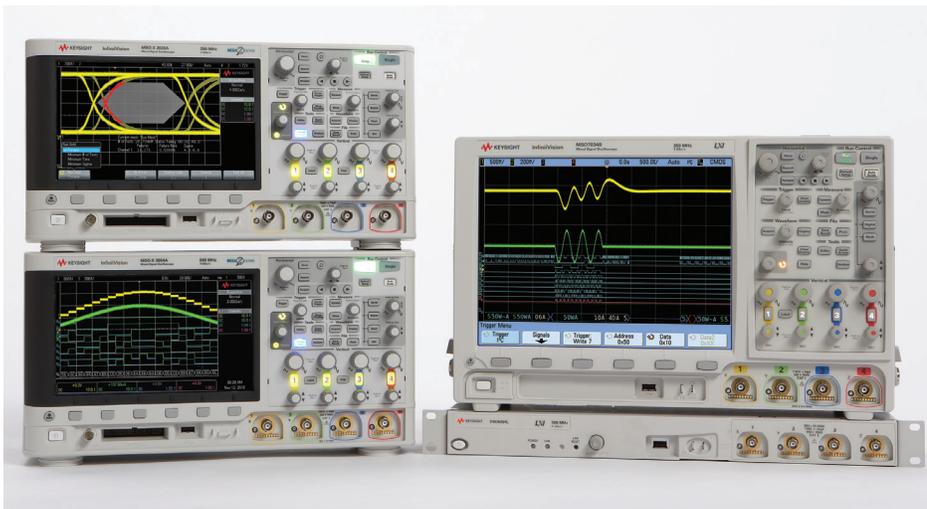

Keysight's InfiniiVision oscilloscope portfolio offers:


- A variety of form factors to fit your environment
- Responsive controls and best signal visibility
- Insightful application-specific measurement options
- Responsive deep memory with MegaZoom technology

Keysight InfiniiVision 7000B Series Oscilloscopes: Engineered for the Best Signal Visibility

12.1" large display makes it easier to view analog, digital and serial signals.

High-resolution color display with XGA resolution and 256 levels of intensity reveals subtle details that most scopes won't show you.

Free IntuiLink data capture PC software makes transferring waveform data or a screen image to a PC fast and easy. Built-in Web viewer via LAN allows for remote measurements and viewing.

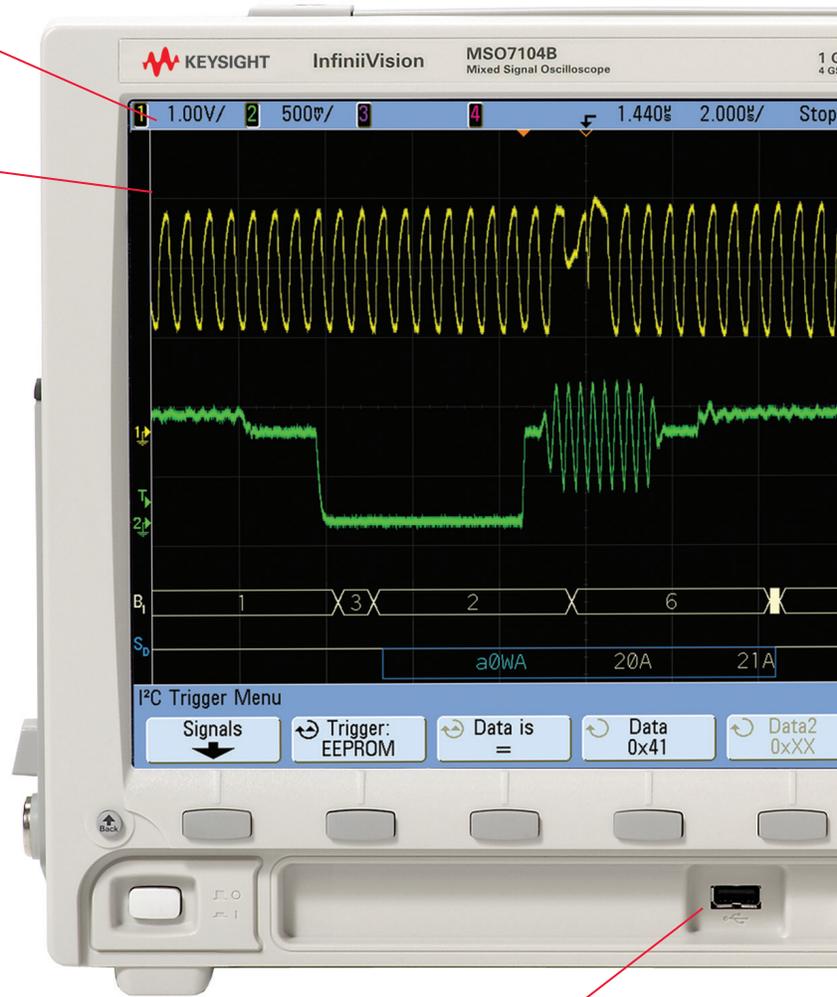

Built-in help in eleven languages – Simply press and hold the front-panel key of interest for a few seconds and a help screen pops up to explain its function.

GUI and front panel overlays available in multiple languages – GUI menus and removable key/knob overlays for the front panel are available in several languages.

Built-in USB port makes it easy to save your work and update your system software quickly.

Built-in 10-MHz reference in/out port synchronizes multiple measurement instruments in a system.


Standard USB and LAN ports provide PC and printer connectivity. For GPIB connectivity, order N4865A adapter.



Trig In port provides an easy way to what ever.

Trig Out port provides an easy way to synchronize your scope to other instruments.

An XGA video output port allows you to connect to a large external monitor.

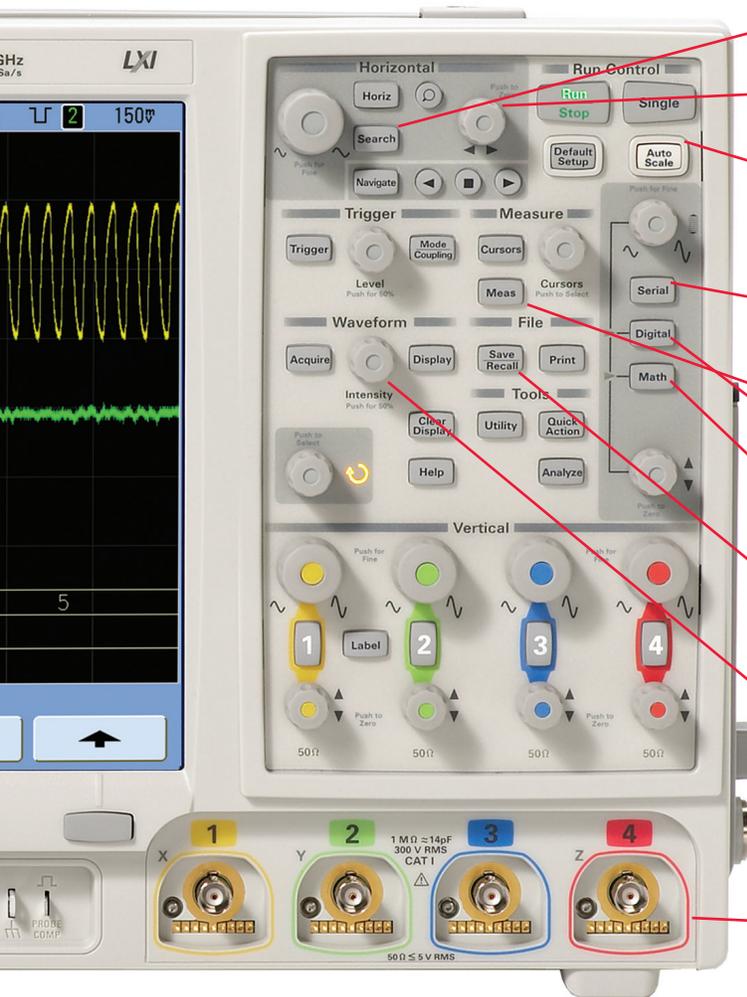

Search and Navigate front panel controls make it easy to find a view specific signal activity.

Quickly pan and zoom for analysis with MegaZoom III's instant response and optimum resolution.

Autoscale lets you quickly display any analog or digital active signals, automatically setting the vertical, horizontal and trigger controls for the best display, while optimizing memory.

Standard serial triggering includes I²C, SPI, and USB (optional CAN/LIN, RS-232/UART, FlexRay, I²S, and MIL-STD1553 advanced triggering and decode).

QuickMeas shows up to four automated measurements with the push of a button.

Digital channel keys provide quick set-up access.


Standard analog HDTV/EDTV triggering supports triggering on 1080i, 1080p, 720p, and 480p HDTV/EDTV standards.

SAVE screen images and waveform data to a connected USB storage device.

Intensity knob allows you to see the right level of waveform detail, just like an analog scope.

AutoProbe interface automatically configures the attenuation ratio of the probe and provides probe power for Keysight's active probes.

Dedicated front panel controls make it easy to access the most common scope controls, including vertical and horizontal scaling.

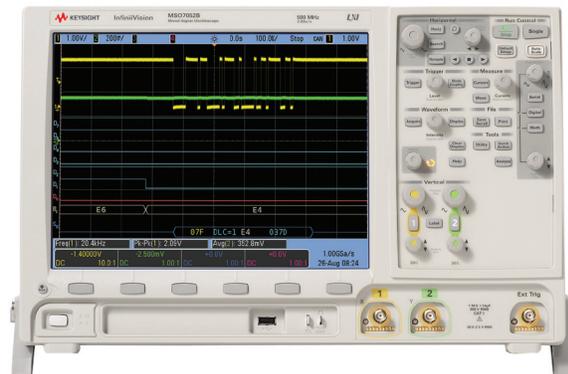

InfiniiVision 7000B Series 2-channel model.

Performance Characteristics

Acquisition: Scope channels	
Sample rate	MSO/DS0701xB: 2 GSa/s each channel MSO/DS0703xB: 2 GSa/sec each channel MSO/DS0705xB, 710xB: 4 GSa/sec half channel ¹ , 2 GSa/sec each channel Equivalent-time sample rate: 400 GSa/s (when real-time mode is turned off)
Maximum memory depth	2 channels/4 channels
– Standard	8 Mpts/4 Mpts
Vertical resolution	8 bits
Peak detection	MSO/DS0701xB: 500-ps peak detect MSO/DS0703xB: 500-ps peak detect MSO/DS0705xB/710xB: 250-ps peak detect
Averaging	Selectable from 2, 4, 8, 16, 32, 64 ... to 65536
High resolution mode	Up to 12 bits of resolution when $\geq 10 \mu\text{s}/\text{div}$ at 4 GSa/s or $\geq 20\text{-}\mu\text{s}/\text{div}$ at 2 GSa/s
Filter	Sin (x)/x interpolation (single shot BW = sample rate/4 or bandwidth of scope, whichever is less) with vectors on and in real-time mode
Acquisition: Digital channels (7000B Series MSO or MSO-upgraded 7000B Series DSO)	
Sample rate	2 GSa/sec one pod ² , 1 GSa/sec each pod
Maximum input frequency	250 MHz
Maximum memory depth	One pod/both pods (with scope channels turned off)
– Standard	8 Mpts/4 Mpts
– Standard	One pod/both pods (with scope channels turned on) 2.5 Mpts/ 1.25 Mpts
Vertical resolution	1 bit
Glitch detection	2 ns (min pulse width)
Vertical system: Scope channels	
Scope channels	MSO/DS07xx2B: Ch 1 and 2 simultaneous acquisition MSO/DS07xx4B: Ch 1, 2, 3 and 4 simultaneous acquisition
Bandwidth (-3 dB) ¹	MSO/DS0701xB: DC to 100 MHz MSO/DS0703xB: DC to 350 MHz MSO/DS0705xB: DC to 500 MHz MSO/DS0710xB: DC to 1 GHz
AC coupled	MSO/DS0701xB: 3.5 Hz to 100 MHz MSO/DS0703xB: 3.5 Hz to 350 MHz MSO/DS0705xB: 3.5 Hz to 500 MHz MSO/DS0710xB: 3.5 Hz to 1 GHz
Calculated rise time (=0.35/bandwidth)	MSO/DS0701xB: 3.5 nsec MSO/DS0703xB: 1 nsec MSO/DS0705xB: 700 psec MSO/DS0710xB: 350 psec
Single-shot bandwidth	MSO/DS0701xB: 100 MHz MSO/DS0703xB: 350 MHz MSO/DS0705xB: 500 MHz MSO/DS0710xB: 1 GHz (in half-channel mode)
Range ³	MSO/DS0701xB, MSO/DS0703xB and MSO/DS0705xB: 2 mV/div to 5 V/div (1 M Ω or 50 Ω) MSO/DS0710xB: 2 mV/div to 5 V/div (1 M Ω), 2 mV/div to 1 V/div (50 Ω)

1. Half channel is when one of channel 1 or 2 is turned on, and/or one of channel 3 or 4 is turned on.

2. A pod is a group of eight digital channels, either 0 to 7 or 8 to 15.

3. 2 mV/div is a magnification of 4 mV/div setting for 350 MHz to 1 GHz models. For vertical accuracy calculations, use full scale of 16 mV for 1 mV/div sensitivity setting and 32 mV for 2 mV/div sensitivity setting.

Performance Characteristics (Continued)

Vertical system: scope channels (Continued)	
Maximum input	CAT I 300 Vrms, 400 Vpk; transient overvoltage 1.6 kVpk With 10073C/D 10:1 probe: CAT I 500 Vpk
Offset range	± 5 V on ranges < 10 mV/div; ± 20 V on ranges 10 mV/div to 200 mV/div; ± 75 V on ranges > 200 mV/div
Dynamic range	± 8 div
Input impedance	1 MΩ ± 1% 14 pF or 50 Ω ± 1.5%, selectable
Coupling	AC, DC
BW limit	25 MHz selectable
Channel-to-channel isolation	DC to max bandwidth > 40 dB
Standard probes	10073D or 10074D shipped standard for each scope channel (N2873A or N2871A optional)
Probe ID	Auto probe sense and AutoProbe interface
ESD tolerance	± 2 kV
Noise, RMS, input shorted	MSO/DSO701xB: 0.50% FS or 300 μV, whichever is greater MSO/DSO703xB: 0.50% FS or 300 μV, whichever is greater MSO/DSO705xB: 0.50% FS or 360 μV, whichever is greater MSO/DSO710xB: 0.65% FS or 360 μV, whichever is greater
DC vertical gain accuracy ^{1,2}	± 2.0% full scale
DC vertical offset accuracy	≤ 200 mV/div: ± 0.1 div ± 2.0 mV ± 0.5% offset value; > 200 mV/div: ± 0.1 div ± 2.0 mV ± 1.5% offset value
Single cursor accuracy ²	± {DC vertical gain accuracy + DC vertical offset accuracy + 0.2% full scale (~1/2 LSB)} Example: for 50 mV signal, scope set to 10 mV/div (80 mV full scale), 5 mV offset, accuracy = ± {2.0% (80 mV) + 0.1 (10 mV) + 2.0 mV + 0.5% (5 mV) + 0.2% (80 mV)} = ± 4.785 mV
Dual cursor accuracy ^{1,2}	± {DC vertical gain accuracy + 0.4% full scale (~1 LSB)} Example: for 50 mV signal, scope set to 10 mV/div (80 mV full scale), 5 mV offset, accuracy = ± {2.0% (80 mV) + 0.4% (80 mV)} = ± 1.92 mV
Vertical system: digital channels (MSO or MSO-upgraded DSO)	
Number of channels	16 logic timing channels – labeled D15 - D0
Threshold groupings	Pod 1: D7 - D0 Pod 2: D15 - D8
Threshold selections	TTL, CMOS, ECL and user-definable (selectable by pod)
User-defined threshold range	± 8.0 V in 10 mV increments
Maximum input voltage	± 40 V peak CAT I; transient overvoltage 800 Vpk
Threshold accuracy ¹	± (100 mV + 3% of threshold setting)
Input dynamic range	± 10 V about threshold
Minimum input voltage swing	500 mV peak-to-peak
Input capacitance	~8 pF with flying leads
Input resistance	100 kΩ ± 2% at probe tip
Channel-to-channel skew	2 ns typical, 3 ns maximum

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ± 10 °C from firmware calibration temperature.

2. 2 mV/div is a magnification of 4 mV/div setting for 350 MHz to 1 GHz models. For vertical accuracy calculations, use full scale of 16 mV for 1 mV/div sensitivity setting and 32 mV for 2 mV/div sensitivity setting.

Performance Characteristics (Continued)

Horizontal	
Range	MSO/DSO701xB: 2 nsec/div to 50 sec/div MSO/DSO703xB: 2 nsec/div to 50 sec/div MSO/DSO705xB: 1 nsec/div to 50 sec/div MSO/DSO710xB: 500 psec/div to 50 sec/div
Resolution	2.5 ps
Time base accuracy ¹	15 ppm
Vernier	1-2-5 increments when off, ~25 minor increments between major settings when on
Delay range	Pre-trigger (negative delay): Greater of 1 screen width or 1 ms Post-trigger (positive delay): 1 s to 500 seconds
Analog delta-t accuracy	Same channel: $\pm 0.0015\%$ reading $\pm 0.1\%$ screen width ± 20 ps Channel-to-channel: $\pm 0.0015\%$ reading $\pm 0.1\%$ screen width ± 40 ps Same channel example (MSO/DSO705xB): For signal with pulse width of 10 μ s, scope set to 5 μ s/div (50 μ s screen width), delta-t accuracy = $\pm \{0.0015\% (10 \mu\text{s}) + 0.1\% (50 \mu\text{s}) + 20 \text{ps}\} = 50.17 \text{ ns}$
Logic delta-t accuracy	Same channel: $\pm 0.005\%$ reading $\pm 0.1\%$ screen width $\pm (1 \text{ logic sample period}, 1 \text{ ns})$ Channel-to-channel: $\pm 0.005\%$ reading $\pm 0.1\%$ screen width $\pm (1 \text{ logic sample period}) \pm \text{chan-to-chan skew}$ Same channel example: For signal with pulse width of 10 μ s, scope set to 5 μ s/div (50 μ s screen width), delta-t accuracy = $\pm \{0.005\% (10 \mu\text{s}) + 0.1\% (50 \mu\text{s}) + 1 \text{ ns}\} = 51.5 \text{ ns}$
Modes	Main, zoom, roll, XY, segmented (optional)
XY	Bandwidth: Max bandwidth Phase error at 1 MHz: < 0.5 degrees Z Blanking: 1.4 V blanks trace (use external trigger on MSO/DSO7xx2B, channel 4 on MSO/DSO7xx4B)
Reference positions	Left, center, right
Segmented memory re-arm time	8 μ s (minimum time between trigger events)
Trigger system	
Sources	MSO7xx2B: Ch 1, 2, line, ext, D15 - D0 DSO7xx2B: Ch 1, 2, line, ext MSO7xx4B: Ch 1, 2, 3, 4, line, ext, D15 - D0 DSO7xx4B: Ch 1, 2, 3, 4, line, ext
Modes	Auto, normal (triggered), single
Holdoff time	~60 ns to 10 seconds
Trigger jitter	15 ps rms

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ± 10 °C from firmware calibration temperature.

Performance Characteristics (Continued)

Trigger system (Continued)	
Selections	Edge, pulse width, pattern, TV, duration, sequence, CAN, LIN, USB, I ² C, SPI, Nth edge burst, RS-232 with Option 232
Edge	Trigger on a rising, falling, alternating or either edge of any source
Pattern	Trigger at the beginning of a pattern of high, low, and don't care levels and/or a rising or falling edge established across any of the analog and digital channels, but only after a pattern has stabilized for a minimum of 2 nsec. The scope channel's high or low level is defined by that channel's trigger level. The logic channel's trigger level is defined by the threshold for the pod, 0 to 7 or 8 to 15.
Pulse width	Trigger when a positive- or negative-going pulse is less than, greater than, or within a specified range on any of the source channels. Minimum pulse width setting: <ul style="list-style-type: none"> – 5 ns (MSO/DSO701xB/703xB scope channels) – 2 ns (MSO/DSO705xB/710xB scope channels) – 2 ns (logic channels on 7000B Series MSO or MSO-upgraded 7000B Series DSO) Maximum pulse width setting: <ul style="list-style-type: none"> – 10 s
TV	Trigger using any scope channel on most analog progressive and interlaced video standards including HDTV/EDTV, NTSC, PAL, PAL-M or SECAM broadcast standards. Select either positive or negative sync pulse polarity. Modes supported include Field 1, Field 2, all fields, all lines, or any line within a field. TV trigger sensitivity: 0.5 division of sync signal. Trigger holdoff time can be adjusted in half field increments.
Sequence	Arm on event A, trigger on event B (edge or pattern), with option to reset on event C or time delay.
CAN	Trigger on CAN (controller area network) version 2.0A and 2.0B signals. Trigger on the start of frame (SOF) bit (standard). N5424A option supports triggering on remote frame ID (RTR), data frame ID (~RTR), remote or data frame ID, data frame ID and data, error frame, all errors, acknowledge error and overload frame.
FlexRay	Trigger on FlexRay Frames, errors, events and cycle-multiplexed triggering. N5432C or option FLX supports also triggering on particular frame types symbolically, such as Startup frames, Null frame, Sync frame, etc., as well as Boolean NOT frame types.
LIN	Trigger on LIN (local interconnect network) sync break at beginning of message frame (standard). N5424A option supports triggering on frame ID.
USB	USB Trigger on USB (universal serial bus) start of packet, end of packet, reset complete, enter suspend, or exit suspend on the differential USB data lines. USB low speed and full speed are supported.
I ² C	Trigger on I ² C (inter-IC bus) serial protocol at a start/stop condition or user defined frame with address and/or data values. Also trigger on missing acknowledge, address with no acq, restart, EEPROM read, and 10-bit write.
SPI	Trigger on SPI (serial protocol interface) data pattern during a specific framing period. Supports positive and negative Chip Select framing as well as clock idle framing and user-specified number of bits per frame.
I ² S	This application provides triggering on audio bus protocol channels for audio left, right, either as well as =, ≠, >, < entered data values and within and out of range values. It provides the ability to easily view the audio packets on the waveform and in a listing window.
RS-232/UART	This application eliminates the need to manually decode bus traffic. Using data captured on the scope or digital channels, the application provides the ability to easily view the information sent over a RS-232 serial bus. Display real-time time-aligned decode of transmit and receive lines. The application also enables triggering on RS-232/UART conditions.
Duration	Trigger on a multi-channel pattern whose time duration is less than a value, greater than a value, greater than a time value with a timeout, or inside or outside of a set of time values. <ul style="list-style-type: none"> – Minimum duration setting: 2 ns – Maximum duration setting: 10 s
MIL-STD 1553	Trigger on specific Command/Status Words, Data Words, and error conditions.

Performance Characteristics (Continued)

Trigger system (Continued)		
Nth edge burst	Trigger on the Nth edge of a burst that occurs after an idle time that you specify. Max edge count: 65,536.	
Autoscale	Finds and displays all active scope and logic (for 7000B Series MSO) channels, sets edge trigger mode on highest-numbered channel, sets vertical sensitivity on scope channels and thresholds on logic channels, time base to display ~1.8 periods. Requires minimum voltage > 10 mVpp, 0.5% duty cycle and minimum frequency > 50 Hz.	
Scope channel triggering		
Range (internal)	± 6 div from center screen	
Sensitivity ¹	< 10 mV/div: Greater of 1 div or 5 mV; ≥ 10 mV/div: 0.6 div	
Coupling	AC, ~10 Hz on MSO/DSO701xB/703xB/705xB/710xB, DC, noise reject, HF reject and LF reject (~50 kHz)	
Digital (D15 - D0) channel triggering (7000B Series MSO or MSO-upgraded 7000B Series DSO)		
Threshold range (user defined)	± 8.0 V in 10 mV increments	
Threshold accuracy	± (100 mV + 3% of threshold setting)	
Predefined thresholds	TTL = 1.4 V, CMOS = 2.5 V, ECL = -1.3 V	
External (EXT) triggering		
	MSO/DSO7xx2B (2-/2+16-ch models)	MSO/DSO7xx4B (4-/4+16-ch models)
Input impedance	1 MΩ ± 3% 14 pF or 50 Ω	2.14 kΩ ± 5%
Maximum input	CAT I 300 Vrms With 10073C/D 10:1 probe: CAT I 500 Vpk	± 15 V
Range	DC coupling: trigger level ± 1 V and ± 8 V	± 5 V
Sensitivity	For ± 1 V range setting: DC to 100 MHz, 100 mV; For ± 8 V range setting: DC to 100 MHz, 250 mV; > 100 MHz to bandwidth of oscilloscope: 500 mV	DC to 500 MHz: 500 mV
Coupling	AC (~3.5 Hz), DC, noise reject, HF reject and LF reject (~50 kHz)	
Probe ID	Auto probe sense and AutoProbe interface Keysight- and Tektronix-compatible passive probe sense	
Display system		
Display	12.1-inch (255 mm x 184 mm) diagonal color TFT LCD	
Throughput of scope channels	Up to 100,000 waveforms/sec in real-time mode	
Resolution	XGA – 768 vertical by 1024 horizontal points (screen area); 640 vertical by 1000 horizontal points (waveform area) 256 levels of intensity scale	
Controls	Waveform intensity on front panel. Vectors on/off; infinite persistence on/off, 8 x 10 grid with intensity control	
Built-in help system	Key-specific help displayed by pressing and holding key or softkey of interest. Language support for 11 languages including English, German, French, Russian, Japanese, Traditional Chinese, Simplified Chinese, Korean, Spanish, Portuguese and Italian.	
Real-time clock	Time and date (user adjustable)	

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm-up period and ± 10 °C from firmware calibration temperature.

Performance Characteristics (Continued)

Measurement features	
Automatic measurements	Measurements are continuously updated. Cursors track last selected measurement. Up to four measurements can be displayed on screen at any one time.
Voltage (scope channels only)	Peak-to-peak, maximum, minimum, average, amplitude, top, base, overshoot, preshoot, RMS, standard deviation (AC RMS), Ratio (dB)
Time	Frequency, period, + width, – width and duty cycle on any channel. Rise time, fall time, X at max Y (time at max volts), X at min Y (time at min volts), delay, and phase on scope channels only.
Counter	Built-in 5-digit frequency counter on any channel. Counts up to the scope's bandwidth (1 GHz max). The counter resolution can be increased to 8 digits with an external 10-MHz reference.
Threshold definition	Variable by percent and absolute value; 10%, 50%, 90% default for time measurements.
Cursors	Manually or automatically placed readout of horizontal (X, ΔX , $1/\Delta X$) and vertical (Y, ΔY). Tracking Cursors provides an additional mode for cursor positioning beyond the current manual method. When cursor tracking is enabled, changing a cursor's x-axis position results in the y-axis cursor tracking the corresponding y-axis (voltage, current, etc.) value. Additionally logic or scope channels can be displayed as binary or hex values.
Waveform math	$f(g(t))$ $g(t): \{ 1, 2, 3, 4, 1-2, 1+2, 1x2, 3-4, 3+4, 3x4 \}$ $f(t): \{ 1-2, 1+2, 1x2, 3-4, 3+4, 3x4, \text{FFT}(g(t)), \text{differentiate } d/dt g(t), \text{integrate } \int g(t) dt, \text{square root } \sqrt{g(t)} \}$ Where 1,2,3,4 represent analog input channels 1, 2, 3, and 4 Note: Channels 3 and 4 only available on MSO/DSO7xx4B models
Measurement statistics	Statistical data for enabled measurements such as mean, min, max, standard deviation and count
Precision Mode	Automatic measurements, waveform math and FFT performed on up to 128Kpts data record
FFT	
Points	Up to 128 Kpts in precision mode
Sounds of FFT	1, 2, 1+2, 1-2, 1x2, MSO/DSO7xx4A: 3, 4, 3+4, 3-4, 3x4; where 1, 2, 3, 4 represent the analog channel inputs 1, 2, 3, and 4
Window	Rectangular, flattop, Hanning, Blackman Harris
Noise floor	-50 to -90 dB depending on averaging
Amplitude	Display in dBV, dBm at 50 Ω
Frequency resolution	0.05/time per div
Maximum frequency	50/time per div
Storage	
Save/recall (non-volatile)	10 setups and traces can be saved and recalled internally. Optional secure environment mode ensures setups and traces are stored to internal volatile memory so data is erased when power is removed. Compliant to NISPOM Chapter 8 requirements.
Storage type and format	USB 1.1 host ports on front and rear panels Image formats: BMP (8-bit), BMP (24-bit), PNG (24-bit) Data formats: X and Y (time/voltage) values in CSV format, ASCII XY and binary format and .alb for offline viewing on a PC Trace/setup formats: Recalled
I/O	
Standard ports	USB 2.0 high-speed device, two USB 1.1 host ports, 10/100BaseT LAN, XGA video output
Max transfer rate	USB (USBTMC-USB488): 3.5 Mbytes/sec 100 Mbps LAN (TCP/IP): 1 Mbytes/sec
Supported printers via USB	For a list of currently supported printers visit www.keysight.com/find/InfiniiVision-printers

Performance Characteristics (Continued)

General characteristics	
Physical size (WxHxD)	17.9" x 11.7" x 8.6" (45.4 cm x 29.8 cm x 22 cm) with legs extended, with screen cover on 17.9" x 10.9" x 6.8" (45.4 cm x 27.7 cm x 17.3 cm) with legs contracted, with screen cover on
Weight	Net: 5.9 kg (13 lbs) Shipping: 9.3 kg (20.5 lbs)
Probe comp output	Frequency ~1.2 kHz; Amplitude ~2.5 V
Trigger out	When Triggers is selected (delay ~17 ns) <ul style="list-style-type: none"> - 0 to 5 V into high impedance - 0 to 2.5 V into 50 Ω When Source Frequency or Source Frequency/8 is selected <ul style="list-style-type: none"> - 0 to 580 mV into high impedance - 0 to 290 mV into 50 Ω Max frequency output: <ul style="list-style-type: none"> - 350 MHz (in source frequency mode when terminated in 50 Ω) - 125 MHz (in source frequency/8 mode when terminated in 50 Ω)
10 MHz ref in/out	TTL out, 180 mV to 1 V amplitude with 0 to 2 V offset
Kensington lock	Connection on rear panel for security
Power requirements	
Line voltage range	100 to 120 V, 50/60/400 Hz; 100 to 240 V, 50/60 Hz auto ranging
Line frequency	50/60 Hz, 100 to 240 VAC; 400 Hz, 100 to 120 VAC
Power usage	120 W max
Environmental characteristics	
Ambient temperature	Operating -10 °C to +55 °C; non-operating -40 °C to +70 °C
Humidity	Operating: Up to 95% relative humidity (non-condensing) at +40 °C Non-operating: Up to 90% relative humidity at +65 °C
Altitude	Operating to 4,570 m (15,000 ft); non-operating to 15,244 m (50,000 ft)
Vibration	Keysight class B1 and MIL-PRF-28800F; class 3 random
Shock	Keysight class B1 and MIL-PRF-28800F; class 3 random; (operating 30g, 1/2 sine, 11 ms duration, 3 shocks/axis along major axis, total of 18 shocks)
Pollution degree	Normally only dry non-conductive pollution occurs Occasionally a temporary conductivity caused by condensation must be expected
Typical operator noise	30 dBA at front of instrument, 35 dBA at rear of instrument
Indoor use	Rated for indoor use only
Other	
Measurement categories	CAT I
Regulatory information	Safety IEC 61010-1:2001 / EN 61010-1:2001 Canada: CSA C22.2 No. 1010.1:1992 UL 61010B-1:2003
Supplementary information	The product herewith complies with the requirements of the Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC, and carries the CE-marking accordingly The product was tested in a typical configuration with HP/Keysight test systems

Ordering Information

Model	Bandwidth	Sample rate	Memory depth	Scope channels	Digital channels
DS07012B	100 MHz	2 GSa/s	8 Mpts	2	
DS07014B	100 MHz	2 GSa/s	8 Mpts	4	
MS07012B	100 MHz	2 GSa/s	8 Mpts	2	16
MS07014B	100 MHz	2 GSa/s	8 Mpts	4	16
DS07032B	350 MHz	2 GSa/s	8 Mpts	2	
DS07034B	350 MHz	2 GSa/s	8 Mpts	4	
MS07032B	350 MHz	2 GSa/s	8 Mpts	2	16
MS07034B	350 MHz	2 GSa/s	8 Mpts	4	16
DS07052B	500 MHz	4 GSa/s	8 Mpts	2	
DS07054B	500 MHz	4 GSa/s	8 Mpts	4	
MS07052B	500 MHz	4 GSa/s	8 Mpts	2	16
MS07054B	500 MHz	4 GSa/s	8 Mpts	4	16
DS07104B	1 GHz	4 GSa/s	8 Mpts	4	
MS07104B	1 GHz	4 GSa/s	8 Mpts	4	16

Accessories included:

Model number	DS070xxB	MS070xxB
Standard probe		
– 100 MHz: 10074D (default), N2871A (optional – as option 002)	●	●
– 350 MHz to 1 GHz: 10073D (default), N2873A (optional – as option 002)		
16 channel flying lead set logic probe (two pods with eight channels each)		●
54695-62301 Probe accessory pouch	●	●
Built-in help language support for English, French, German, Russian, simplified Chinese, traditional Chinese, Korean, Spanish, Portuguese, Japanese and Italian	●	●
Printed user's guide (Option ABA for English, option AB2 for simplified Chinese, option ABJ for Japanese)	●	●
Documentation CD (PDFs of Programmer's Reference Guide, User Guide, and Service Guide)	●	●
Keysight I/O libraries suite 15.0	●	●
Localized power cord	●	●
Front panel cover	●	●

Note: IntuiLink Data Capture software available free on Web at www.keysight.com/find/intuilink

Ordering Information (Continued)

Options

Product	Description
DSO to MSO upgrade ¹	N2741A for DS0701xB
	N2735A for DS0703xB
	N2736A for DS0705xB
	N2737A for DS0710xB
SEC	Secure Environment Mode - Provides compliance with National Industrial Security Program Operating Manual (NISPOM) Chapter 8 requirements (factory-installed option only for new purchase)
A6J	ANSI Z540 compliant calibration

1. Includes a 54620-68701 logic cable kit, a label and an upgrade license to activate the MSO features. Installs in less than 5 minutes.

Serial Data Analysis Applications

Option number – user installed	Option number – factory installed	Description
N5424A	AMS	CAN/LIN automotive triggering and decode (4 and 4+16 channel models only)
N5423A	LSS	I ² C/SPI serial decode option (for 4/4+16 channel models only)
N5457A	232	RS-232/UART triggering and decode (4 and 4+16 channel models only)
N5468A	SND	I ² S Triggering and Decode (4 and 4+16 channel models only)
N5432C	FLX	FlexRay Measurements (4 and 4+16 channel models only)
N5469A	553	MIL-STD 1553 Triggering and Decode (4 and 4+16 channel models only)

PC-based applications	Description
N5406A	FPGA dynamic probe for Xilinx (MSO models only)
N5434A	FPGA dynamic probe for Altera (MSO models only)
B4610A	Offline viewing and analysis of MSO/DSO data on a PC
U1881A	Power measurement and analysis application
E2690B	ASA's Oscilloscope tools

Other Measurement Options

Option number – user installed	Option number – factory installed	Description
N5454A	SGM	Segmented memory
N5455A	LMT	Mask limit testing

Accessories

Product number	Description
N2733A	Soft carrying case for 7000B Series oscilloscope
N2732A	Rackmount kit for 7000B Series oscilloscope
GemStar 5000	Transit case with foam molding customized for InfiniiVision 7000B Series available from GemStar Mfg. www.gemstarmfg.com
N2918A	Evaluation kit
N4865A	GPIB-to-LAN adapter



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.




www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

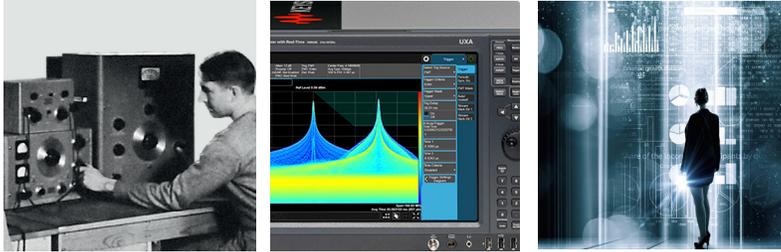

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries: www.keysight.com/find/contactus (BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/7000B