



# Power Splitter

11667L/A/B/C/D: DC to 2/18/26.5/67 GHz

## Key Features

- Broad operating frequency up to 67 GHz
- Excellent output VSWR at the auxiliary arm when used for source leveling or ratio measurement applications
- Unmatched tracking between outputs ensures minimum measurement uncertainty

## Description

The Keysight Technologies, Inc. 11667x is a 50 ohm two-resistor type power splitter that provides exceptional amplitude and phase tracking for highly accurate power splitting. Offering excellent output power symmetry between the two output ports, the 11667x is recommended for applications that require external source leveling, ratio measurements and for other legacy network/ gain-phase analyzers that do not have built-in power splitters or directional bridges.

## Applications

### Network measurement

Milliohm impedance measurements with shunt-thru method (DC-DC converters, large bypass capacitors)

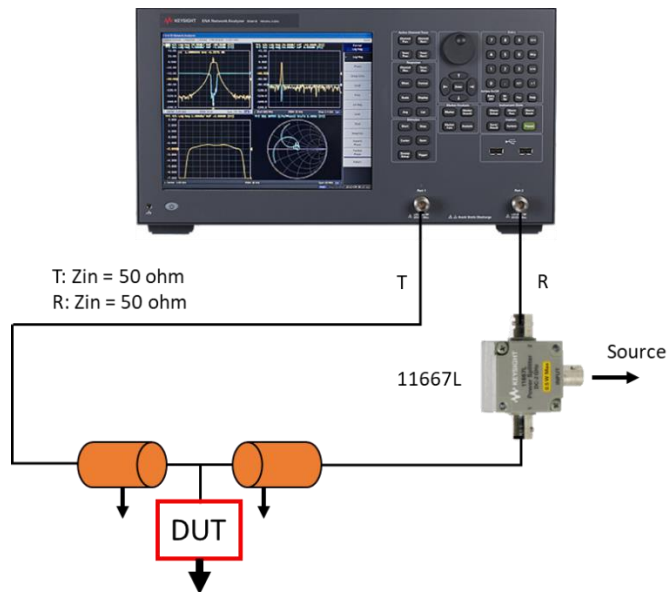


Figure 1. Shunt-thru impedance measurement

### Transmission coefficient measurements for 2-port devices

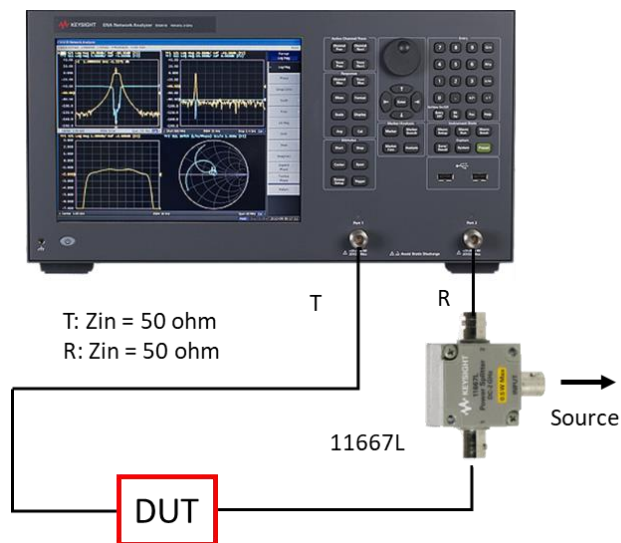


Figure 2. 50-ohm device measurement

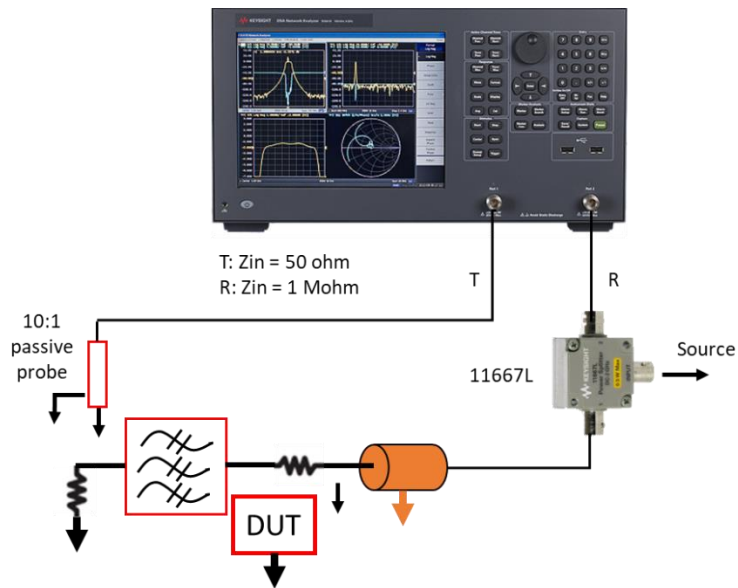


Figure 3. Non- 50-ohm LF filter measurement

## Ratioing and Leveling

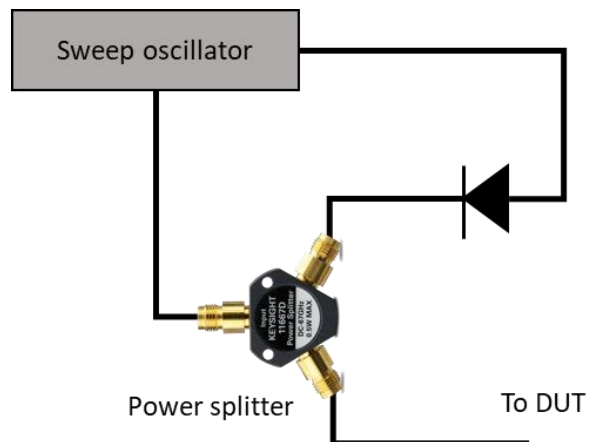


Figure 4. Power splitter test setup for leveling with a crystal detector

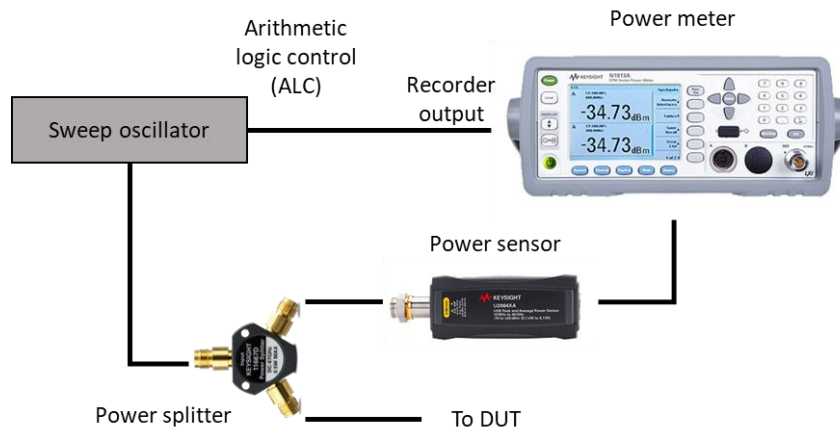


Figure 5. Power splitter test setup for leveling with a power meter

## Specifications

Specifications describe the product's warranted performance. Supplemental and typical characteristics are intended to provide typical but non-warranted performance parameters. These are denoted as "typical", "nominal" or "approximate"

Specifications	11667L	11667A	11667B	11667C	11667D
<b>Frequency range</b>	DC to 2 GHz	DC to 18 GHz	DC to 26.5 GHz	DC to 50 GHz	DC to 67 GHz
<b>Connector</b>	BNC (f) all ports	Type-N (f) all ports <sup>1</sup>	3.5 mm (f) all ports	2.4 mm (f) all ports	1.85 mm (f) all ports
<b>Insertion loss (dB)</b>	(6 dB nominal): DC to 100 MHz: 0.2 100 MHz to 2 GHz: 0.6	(6 dB nominal): DC to 4 GHz: 0.2, + 0.6 to any output, typical 4 to 8 GHz: 0.2 + 1.0 to any output, typical 8 to 18 GHz: 0.2 + 1.8 to any output, typical	DC to 26.5 GHz: 7 dB typical	DC to 18 GHz: 7 18 to 26.5 GHz: 7.5 26.5 to 40 GHz: 8 40 to 50 GHz: 8.5	DC to 18 GHz: 7.0 18 to 26.5 GHz: 7.5 26.5 to 40 GHz: 8.0 40 to 50 GHz: 8.5 50 to 67 GHz: 10.5
<b>Return loss, dB (VSWR)</b>	Input: 18 (1.3) typical  Output: 11 (1.78) typical	Input: DC to 4 GHz: 23 (1.15) 4 to 8 GHz: 19 (1.25) 8 to 18 GHz: 15 (1.45)  Output: DC to 4 GHz: 26 (1.10) 4 to 8 GHz: 21 (1.20) 8 to 18 GHz: 17 (1.33)  (8 to 18 GHz: 17 (1.38) for option 002	Input: DC to 18 GHz: 20 (1.22) 18 to 26.5 GHz: 18 (1.29)  Output: DC to 26.5 GHz: 20 (1.22)	Input: DC to 18 GHz: 20 (1.22) 18 to 26.5 GHz: 16 (1.38) 26.5 to 40 GHz: 14 (1.50) 40 to 50 GHz: 12 (1.65)  Output: DC to 26.5 GHz: 18 (1.29) 26.5 to 40 GHz: 14 (1.50) 40 to 50 GHz: 12 (1.65)	Input: DC to 18 GHz: 18.6 (1.25) 18 to 26.5 GHz: 15.6 (1.43) 26.5 to 40 GHz: 14.0 (1.58) 40 to 50 GHz: 10.3 (1.79) 50 to 67 GHz: 8.5 (2.1)  Output: DC to 18 GHz: 17.7 (1.33) 18 to 26.5 GHz: 14 (1.43) 26.5 to 40 GHz: 11.7 (1.58) 40 to 50 GHz: 9.5 (1.79) 50 to 67 GHz: 8.5 (2.1)
<b>Amplitude tracking (dB)</b>	DC to 100 MHz: 0.1 100 MHz to 2 GHz: 0.2	DC to 4 GHz: 0.15 4 to 8 GHz: 0.20 8 to 18 GHz: 0.25	DC to 18 GHz: 0.25 18 to 26.5 GHz: 0.40	DC to 18 GHz: 0.30 18 to 26.5 GHz: 0.35 26.5 to 50 GHz: 0.40	DC to 50 GHz: 0.40 typical 50 to 67 GHz: 0.65 typical
<b>Phase tracking (degree) typical</b>	DC to 100 MHz: 1.0 100 MHz to 2 GHz: 3.0	DC to 4 GHz: 0.5 4 to 8 GHz: 1.5 8 to 18 GHz: 3.0	DC to 18 GHz: 1.5 18 to 26.5 GHz: 2.5	DC to 18 GHz: 2.0 18 to 26.5 GHz: 2.5 26.5 to 50 GHz: 3.0	DC to 50 GHz: 4.0 50 to 67 GHz: 7.0
<b>Max input power</b>	+27 dBm	+27 dBm	+27 dBm	+27 dBm	+ 30 dBm

#### Connectors:

Type-N female on all ports

Option 001: Type-N male on the input and type-N female on the output ports

Option 002: Type-N female on the input and APC-7 on the output ports

## Typical Performance

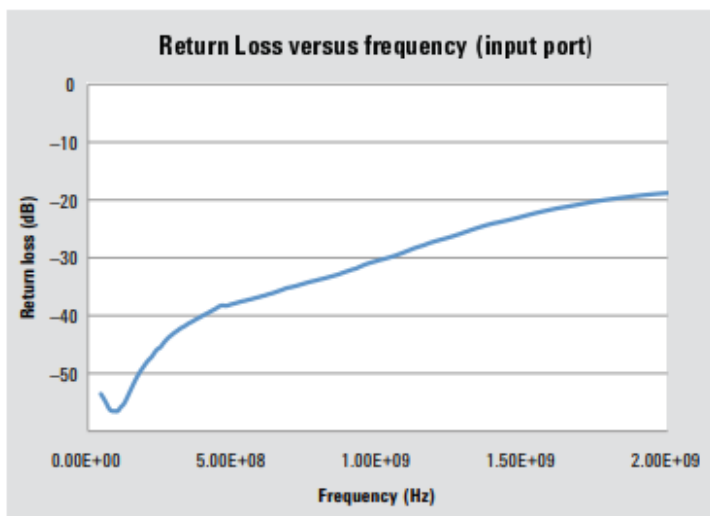


Figure 6. 11667L input port return loss versus frequency (typical)

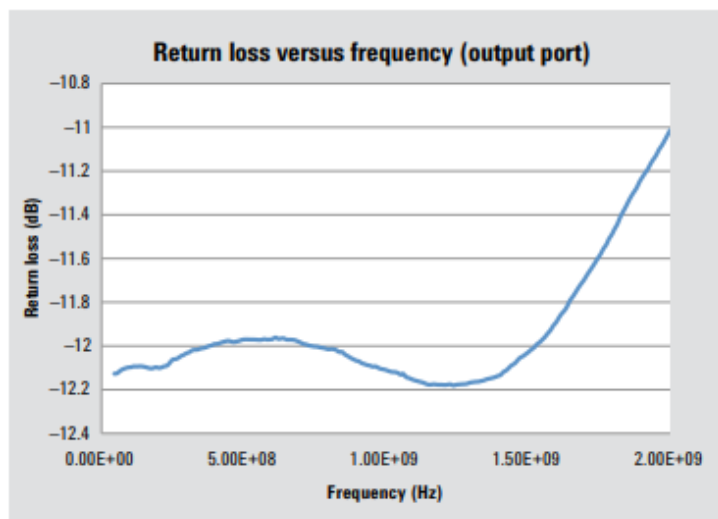


Figure 7. 11667L output port return loss versus frequency (typical)

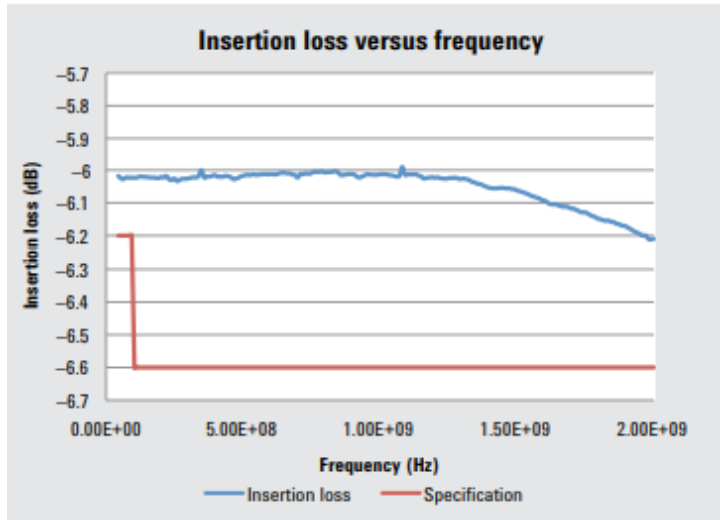


Figure 8. 11667L insertion loss versus frequency (typical)

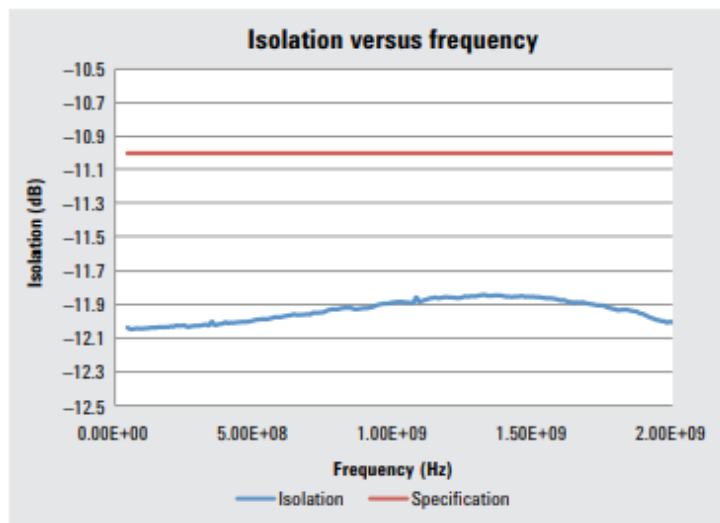


Figure 9. 11667L isolation versus frequency (typical)

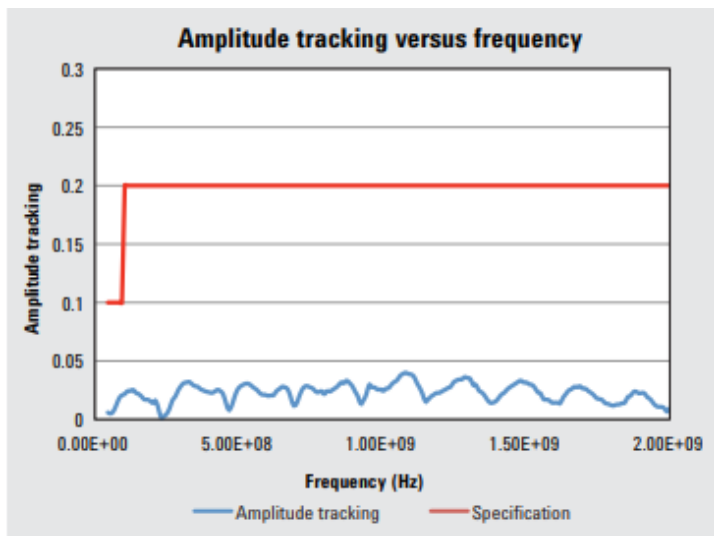


Figure 10. 11667L amplitude tracking (dB) versus frequency (typical)

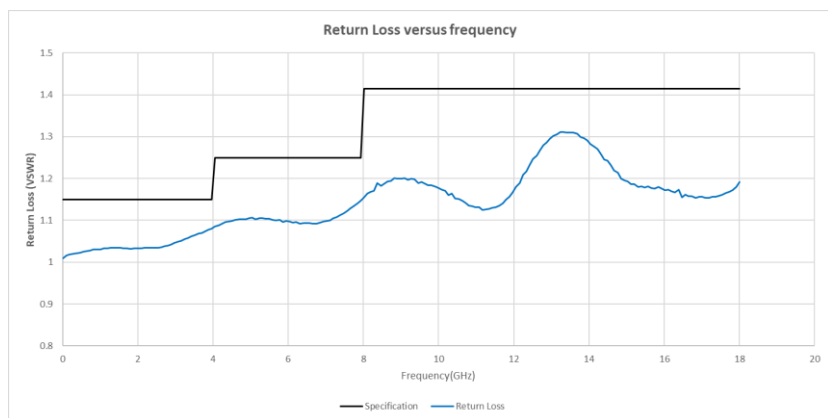


Figure 11. 11667A Leveling or ratio measurement source match (typical)

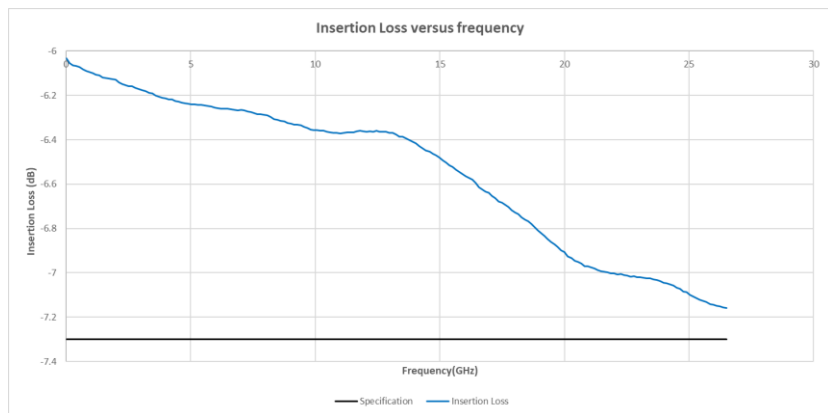


Figure 12. 11667B Insertion loss versus frequency (typical)



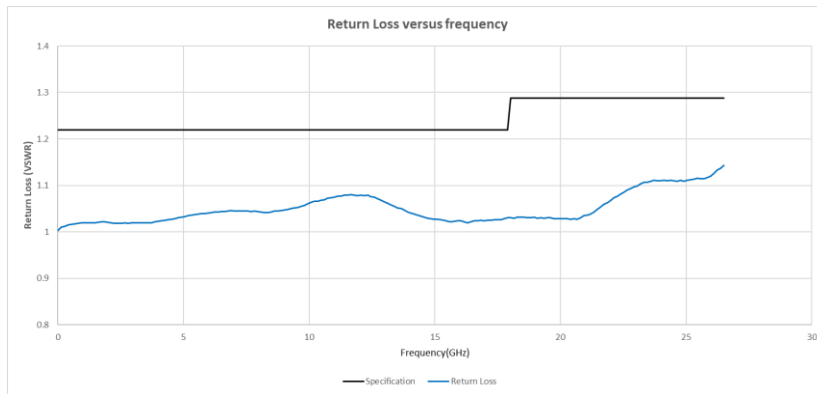


Figure 13. 11667B Leveling or ratio measurement source match (typical)

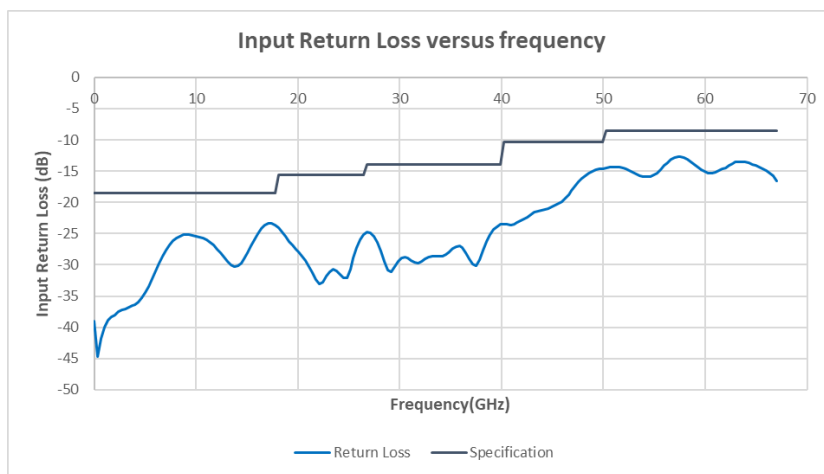


Figure 14. 11667D Input return loss versus frequency (typical)

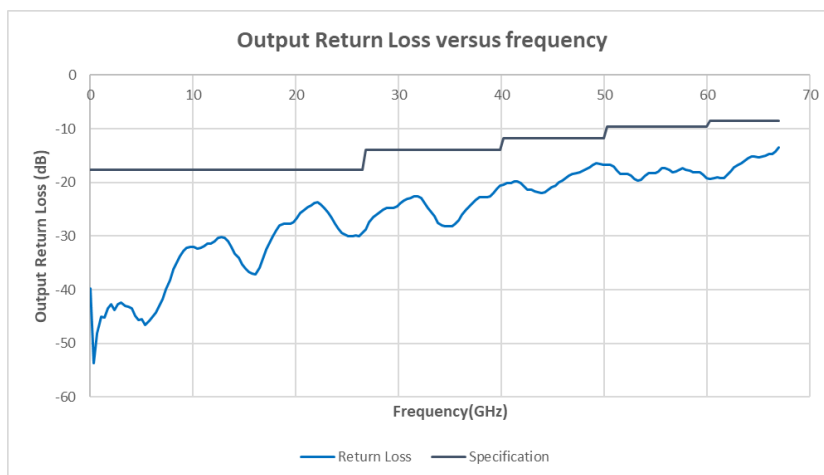


Figure 15. 11667D Output equivalent return loss versus frequency (typical)

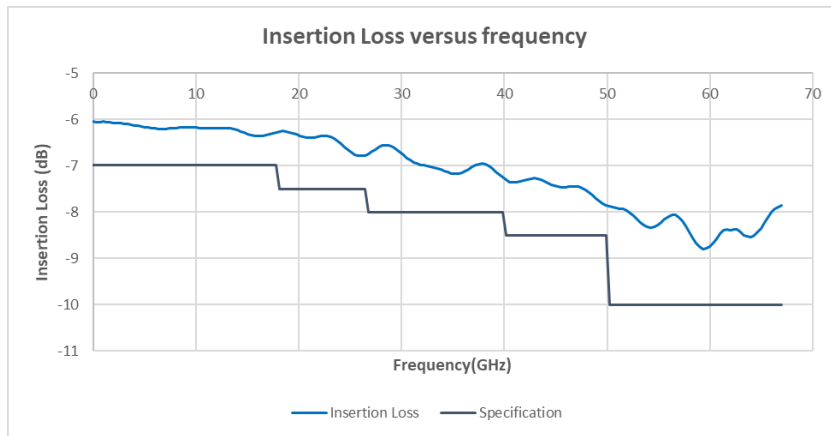


Figure 16. 11667D Insertion loss versus frequency (typical)

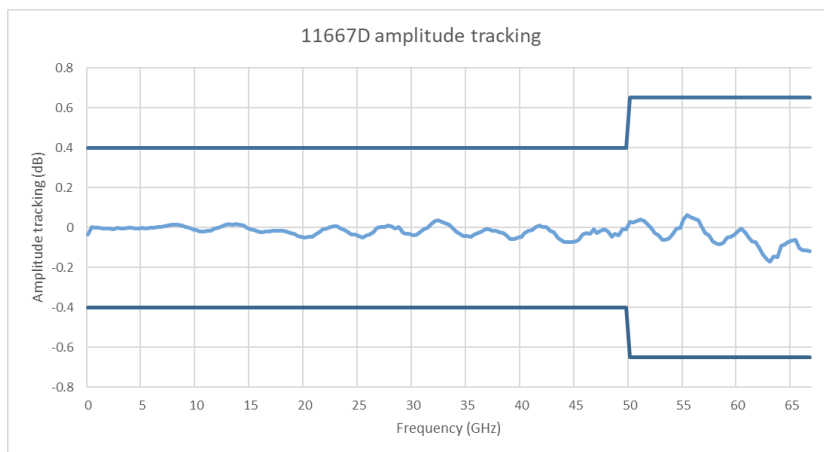


Figure 17. 11667D Amplitude tracking versus frequency (typical)

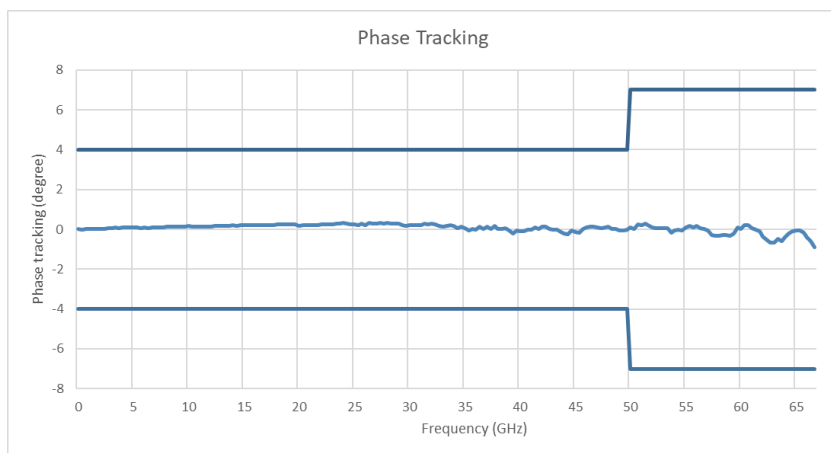


Figure 18. 11667D phase tracking versus frequency (typical)

## Environmental Specifications

The 11667x power splitter are designed to fully comply with Keysight Technologies' product operating environment specifications. The following summarizes the environmental specifications for these products.

Environmental condition	11667L
<b>Temperature</b> Operating Non-operating	0 – 55 °C –40 °C to 70 °C
<b>Humidity</b> Non-operating Operating Functional shock	–10 °C to 25 °C / 50% RH 40 °C / 95% RH, 5-day cycle Half-sine, 30 g, 11 ms
<b>Vibration</b> Operating random vibration	5 to 500 Hz, 0.21g RMS
<b>Altitude</b> Operating/storage	≤ 4600 meters (15,000 feet)
<b>ESD immunity</b> Direct discharge Air discharge	6kV 15kV

Environmental condition	11667C
<b>Temperature</b> Operating Non-operating	0°C to +55°C -40°C to +75°C
<b>Humidity</b> Operating/storage	Up to 95% RH
<b>Shock</b> End-user handling Mechanical survival Transportation	Delta-V: 3m/s ±5%, Duration <3ms at 6 faces Half Sine: 1000g, 0.5ms at 6 faces 50g, delta-V: 8m/s at 6 faces
<b>Vibration</b> Operating random	0.3 Grms, 5-500 Hz
<b>Altitude</b> Operating Storage and shipment	Up to 4,572 metres (15,000 feet) Up to 7,620 metres (25,000 feet)

<b>ESD immunity</b>	
Contac discharge	4 kV (to center conductor)
Air discharge	15 kV (to outer conductor)

<b>Environmental condition</b>	<b>11667D</b>
<b>Temperature</b>	
Operating	0°C to +55°C
Storage	−40°C to +75°C
Cycling	−40°C to +75°C, 10 cycles at 20 °C per minute ramp rate, 20 minutes dwell time per MIL-STD-883F, Method 1010.8, Condition C (modified)
<b>Humidity</b>	
Operating	95% RH at 40°C, 24 hours cycling, 5 cycles
Condensation	95% RH at -10°C to 25°C, Method 2
Resistance	95% RH at 65°C, 10 Days per JEDEC HAST Standard
<b>Shock</b>	
End-user handling	Delta-V: 3m/s ±5%, Duration <3ms at 6 faces
Mechanical survival	Half Sine: 1000g, 0.5ms at 6 faces
Transportation	50g, delta-V: 8m/s at 6 faces
<b>Vibration</b>	
Operating random	0.3 Grms, 5-500 Hz
<b>Altitude</b>	
Operating	4,600 meters (15,092 feet)
Non-operating	4,600 meters (15,092 feet)
<b>ESD immunity</b>	
Contac discharge	4 kV (to center conductor)
Air discharge	15 kV (to outer conductor)

## Mechanical Dimensions

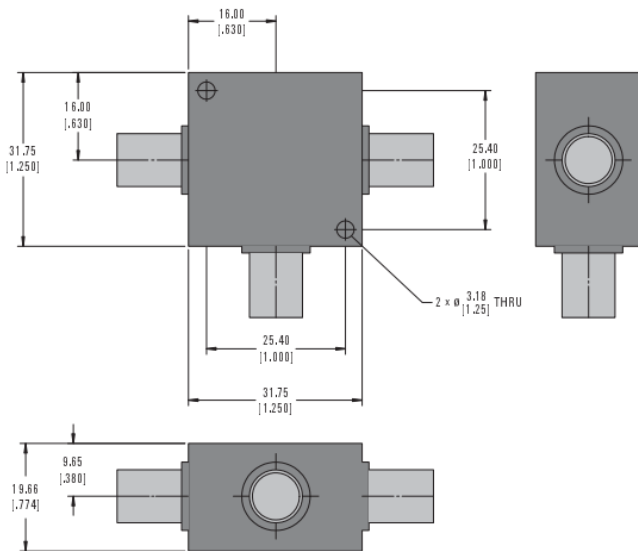


Figure 19. 11667L mechanical dimension

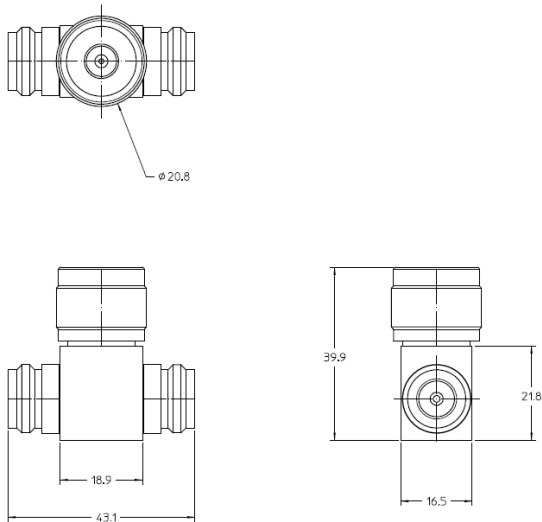


Figure 20. 11667A mechanical dimension

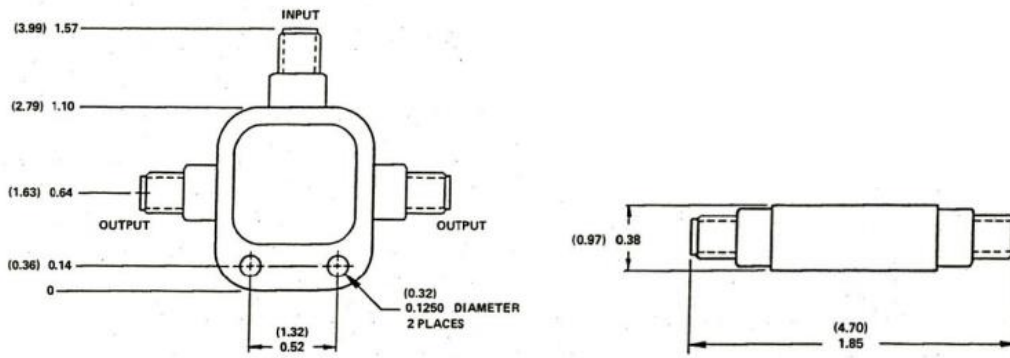


Figure 21. 11667B mechanical dimension

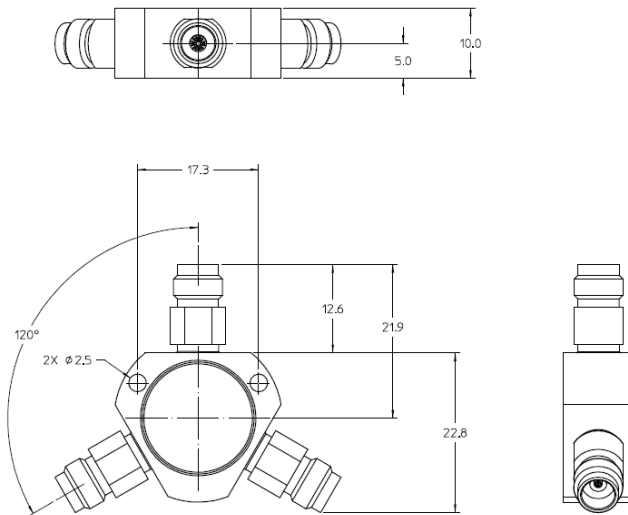


Figure 22. 11667C/D mechanical dimension

## Ordering Information

Model	Description
11667L	Power splitter, DC to 2 GHz
11667A	Power splitter, DC to 18 GHz Option 001: Type-N male on the input and type-N female on the output ports Option 002: Type-N female on the input and APC-7 on the output ports
11667B	Power splitter, DC to 26.5 GHz
11667C	Power splitter, DC to 50 GHz
11667D	Power splitter, DC to 67 GHz

## More RF & Microwave Test Accessories

For selection of more than 300 models of various type of RF and microwave test accessories with operating frequency up to 110 GHz. Go to: [www.keysight.com/find/mta](http://www.keysight.com/find/mta)

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

