


Keysight Technologies

Infiniium 90000L Series Oscilloscopes

Data Sheet

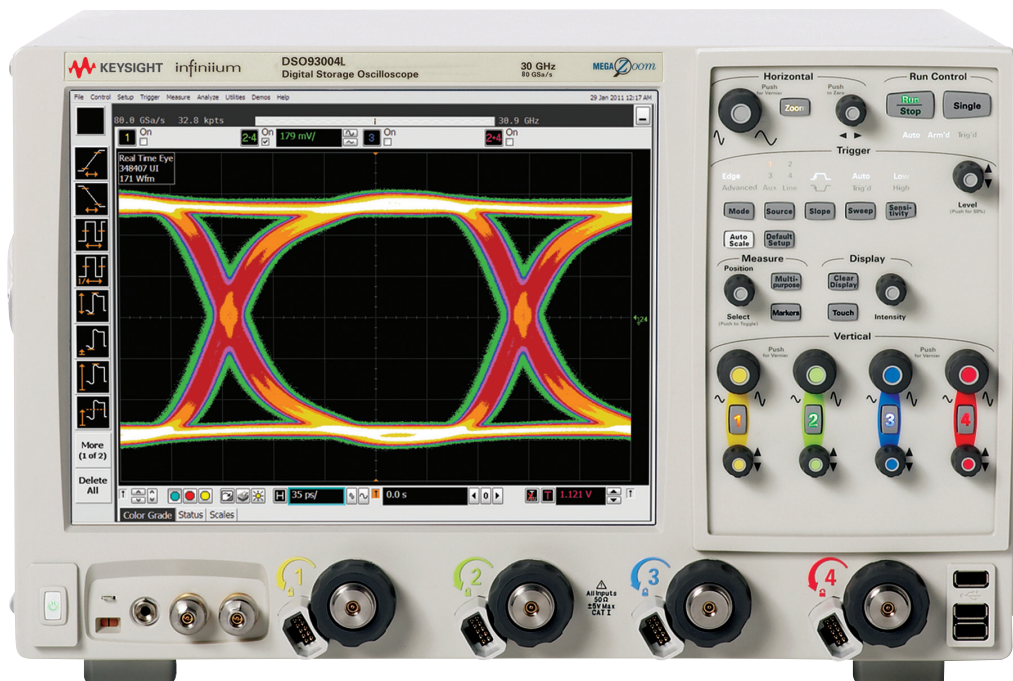

30 GHz Real Time Oscilloscope

Need bandwidth?


When you’re deploying leading edge high-speed serial bus designs like FibreChannel, SAS 12 G, or 10 Gb Ethernet KR, jitter matters and picoseconds count. When you’re doing spectral analysis of wide-bandwidth RF signals or investigating transient phenomena, bandwidth is critical. You need the most accurate real-time oscilloscope you can get. Keysight Technologies, Inc. Infiniium 90000L Series scopes are engineered for 30 GHz of real time bandwidth featuring:

- High real-time scope measurement accuracy
- The industry’s only 30 GHz oscilloscope probing system
- The industry’s most comprehensive application-specific measurement software

30 GHz real time analog bandwidth with lower price

The quest for higher real-time scope bandwidth involves pushing against the physical limitations of state-of-the-art integrated circuit technology. We define true analog bandwidth as performance achieved directly through the hardware of the real-time oscilloscope, and we’ve achieved breakthrough performance of 32 GHz with the Infiniium 90000 X-Series. Other vendors, limited to 16 or 20 GHz hardware, employ various techniques to boost the bandwidth specification of their scopes. However, these methods introduce noise and distortions that negatively impact measurements.

The 90000L Series offers 30 GHz of real time oscilloscope bandwidth with lower signal fidelity than the 90000 X-Series for a lower price.

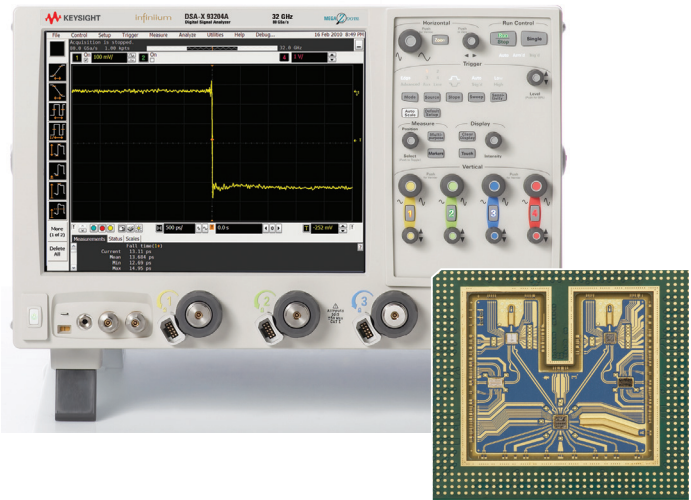


Custom front end technology requiring over five years of design effort yields the fastest real-time oscilloscope hardware available today.

Model number	Analog bandwidth		Sample rate		Max memory Depth 4 channel
	2 channel	4 channel	2 channel	4 channel	
DSA93004L	30 GHz	16 GHz	80 GSa/s	40 GSa/s	500 Mpts
DSO93004L	30 GHz	16 GHz	80 GSa/s	40 GSa/s	500 Mpts

Upgradeable to a 32 GHz 90000 X-Series

Need the world’s best signal integrity? Purchase the 90000 X-Series upgrade and benefit from more than 30% less oscilloscope noise and 2 extra GHz of bandwidth with option N5471K.


30 GHz Real Time Oscilloscope Bandwidth

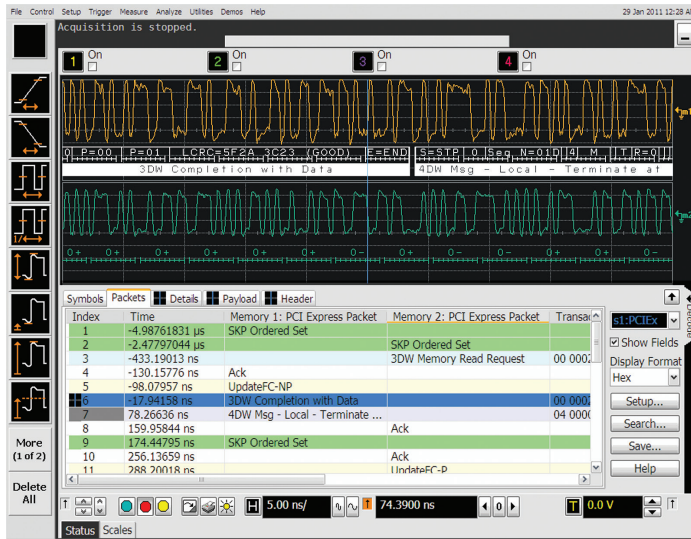

Industry's first and only 30 GHz oscilloscope probing system

No matter how good your scope is, if your probes can't operate at sufficient bandwidths your measurements are compromised. The Keysight Infiniium 90000L scopes offer probing solutions that are up to the tough challenges of high-speed signal capture with the following:

- Fully-integrated probe amplifier s-parameter correction
- The industry's first bandwidth-upgradable probe amplifier

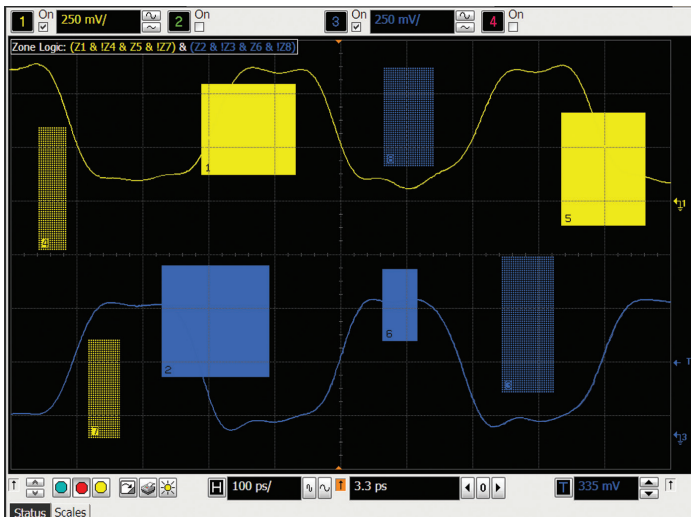

Easily isolate signals of interest with zone qualified view using InfiniiScan software triggering, just one of over 40 application-specific software options

High real-time scope measurement accuracy

When you're designing with faster signals, shrinking eyes and tighter jitter budgets mean that error introduced by your oscilloscope can seriously impact your measurement results. The 90000L features the following characteristics:

- 30 GHz analog bandwidth
- Oscilloscope noise floor of 2.7mV at 50 mV/div at 30 GHz
- Jitter measurement floor (200 fs)

With its low noise floor and deep memory separate jitter on patterns as long as PRB523.



The industry's most comprehensive application-specific measurement software

When time is of the essence, you need tools that can speed true understanding of your signal activity. From serial bus debug and compliance testing to jitter measurements to sophisticated triggering capability, Keysight stays on top of the test standards and your requirements by working to ensure that you get accurate results more quickly. The Keysight Infiniium 90000L Series scopes offer the following:

- The broadest range of jitter, triggering, analysis and display tools
- Pre-built compliance testing software based on the expertise of our engineers on the standards committees
- Support for emerging technologies including FibreChannel, SAS 12G, or MIPI® M-PHY™

30 GHz of real time oscilloscope bandwidth and 80 GSa/s sample rate.

Capture up to 6.125ms of data using up to 500 Mpts of acquisition memory at 80 GSa/s.

See your signal more clearly with a 12.1-inch XGA (1024 x 768) high-resolution color touch screen display.

Identify anomalies easily with a 256-level intensity-graded or color-graded persistence display that provides a three dimensional view of your signals.


Live indicator shows when the scope is running a long operation.

Remote access through 10/100/1000 BaseT LAN interface with web-enabled connectivity uses ultra-responsive Ultra VNC.

GPIB and LAN provide remote measurements. Optional Infiniium application remote program interface allows application/compliance software automation. LXI class C compliant. MATLAB support.

Removable hard disk drive option is available for added data security.


Optional USB external DVD-RW drive allows you to install your favorite third-party software conveniently and can be used to back up your critical measurement data.

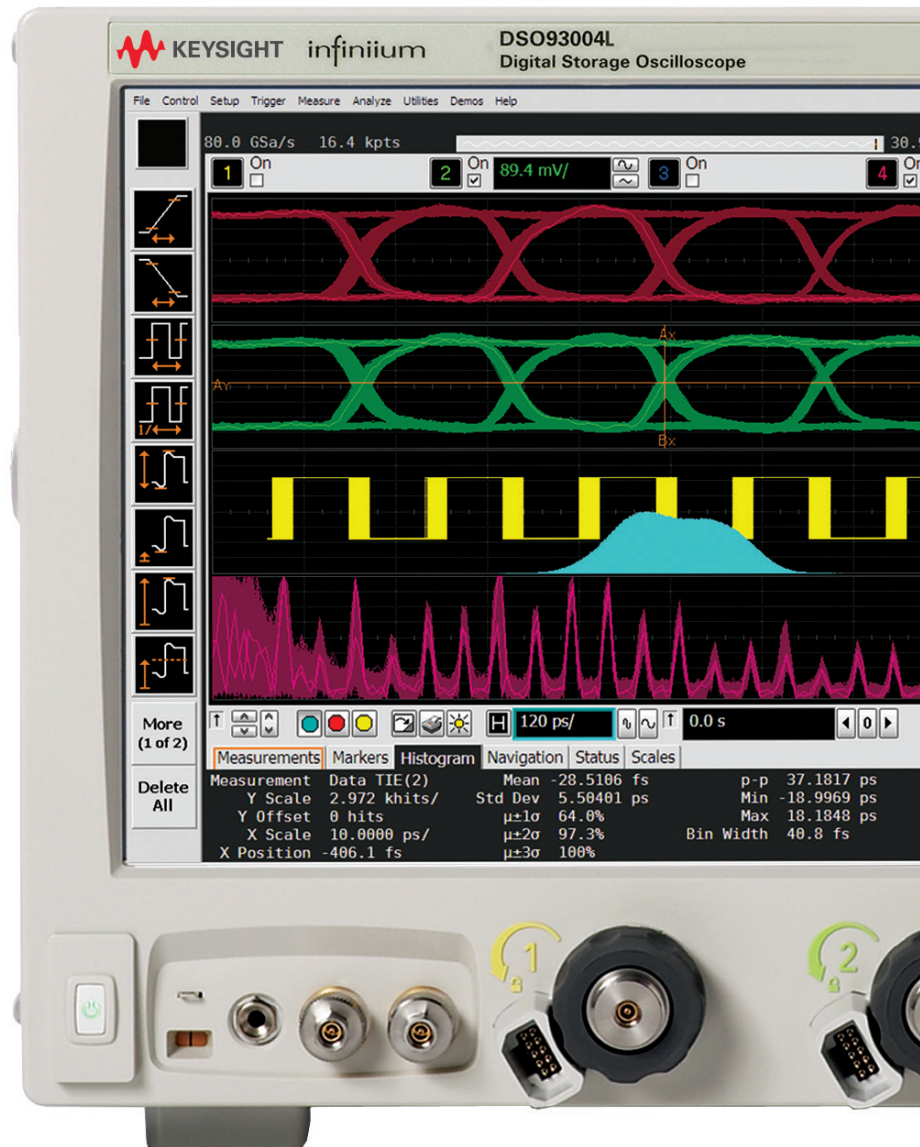

Threaded RF connectors ensure the most reliable signal integrity for high-performance instruments. The Autoprobe II interface combines the tried-and-true, robust 3.5 mm threaded RF connector of Keysight sampling scopes with a convenient automatic torque mechanism (clutch) that ensures a consistent 8 in. lbs. connection is made without the hassles of a torque wrench.

Simply press the horizontal delay knob to set the delay value to zero. A zoom button provides quick access to two screen zoom mode.

10 MHz reference clock can be input to or output from the scope to allow precise timebase synchronization with RF instruments or logic analyzers

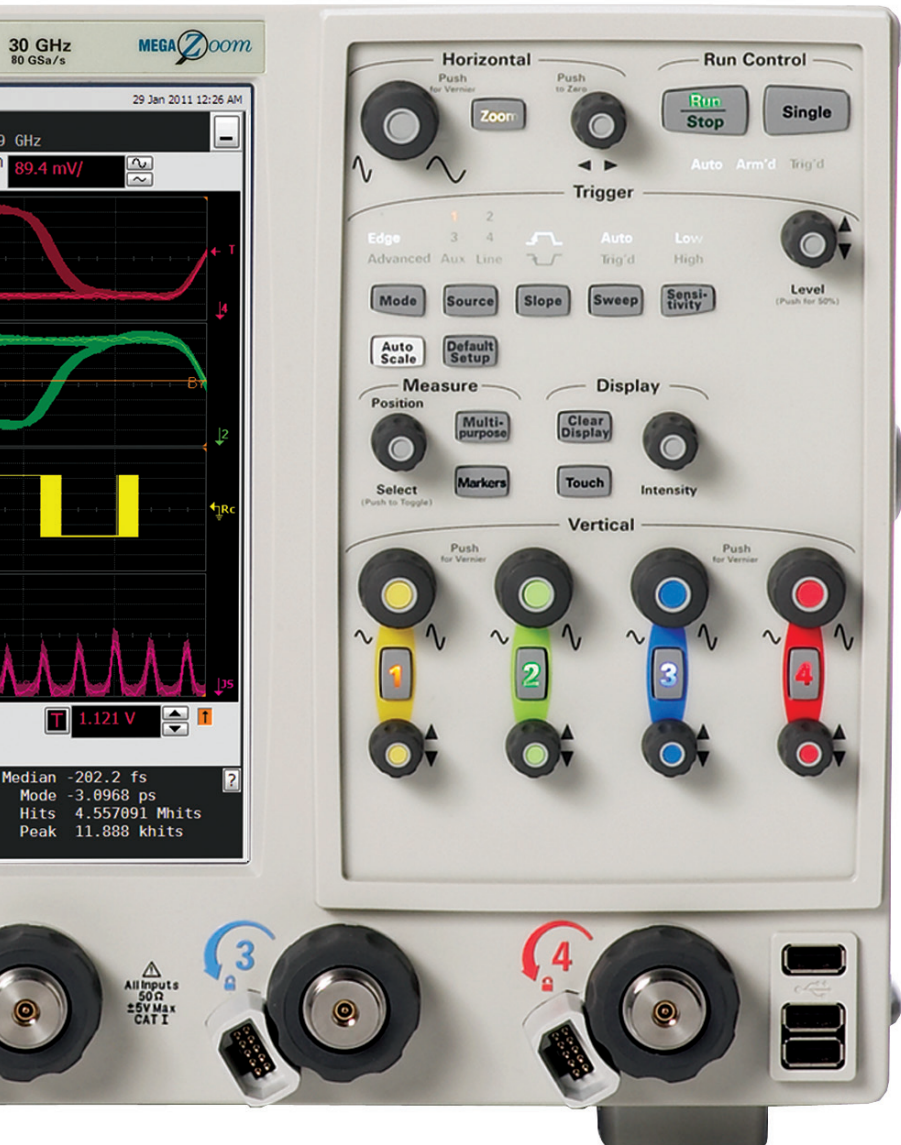

Optional x4 PCI Express® slot speeds up offload times by a factor of 5, using socket drivers. Use this option (823) for faster deep offloads of the waveforms.

Dedicated single acquisition button provides better control to capture a unique event

Customizable multipurpose key gives you any five automated measurements with a push of a button. You can also configure this key to execute a script, print/save screen shots, save waveforms or load a favorite setup.

Measure section, including a toggling marker button and a dedicated marker knob, provides quick access to your marker control.

Quick access to fine/vernier control by pressing the horizontal and vertical sensitivity knobs.

Increase your productivity with a familiar Infiniium graphical user interface, including your favorite drag-and-drop measurement icons. Infiniium's analog-like front panel has a full set of controls color-coded to the waveforms and measurements, making your tasks simple.

Three front panel USB 2.0 host ports match your USB keyboard, mouse, and USB memory drive connection for saving setup and data files and screen shots.

An additional four USB 2.0 host ports and a USB 2.0 device port on the back panel. Perfect for extra connectivity including an optical drive. A USB 2.0 device port lets you control the scope and transfer data via a USB 2.0 480 Mb/s connection.

High Real Time Measurement Accuracy


Whether you're deploying emerging high speed bus technology, identifying spectral content of wide-bandwidth RF signals, or analyzing transient physical phenomena, you need the truest representation of your signals under test. Keysight invested in leading edge technology to bring you the highest real-time oscilloscope measurement accuracy available today.

New custom integrated circuits using a proprietary Indium Phosphide (InP) process and breakthrough packaging technology enable industry-leading performance, including the:

- 30 GHz real time oscilloscope bandwidth
- Lower oscilloscope noise floor
- Lower oscilloscope jitter measurement floor


30 GHz real time oscilloscope bandwidth

The engineering of a high-performance real-time oscilloscope front end requires designing pre-amplifiers, triggering capability, and sampling technology. But putting it all together might be the toughest challenge. Using fine line microcircuit processes and relying extensively on years of experience with RF design, Keysight developed the front end multi-chip modules shown here for the Infiniium 90000L Series oscilloscopes. Packaging technology provides excellent high-frequency electrical properties along with superior heat dissipation.

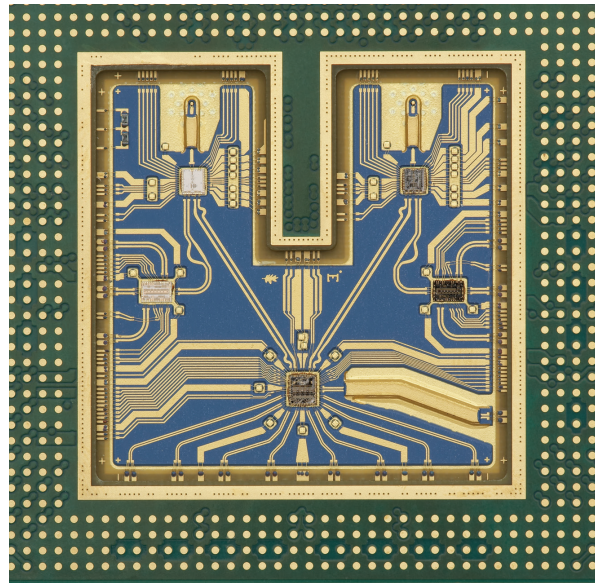

Low oscilloscope noise floor

One of the keys to measurement accuracy at high bandwidths is minimizing the noise generated by the oscilloscope itself. Keysight utilizes a proprietary Indium Phosphide (InP) integrated circuit process in the design of the Infiniium 90000L Series oscilloscopes because other oscilloscope techniques just can't deliver the necessary combination of high-bandwidth and low noise. Not only does that mean you're purchasing the best tool today, but it also means you can count on technology leadership from Keysight in the future.

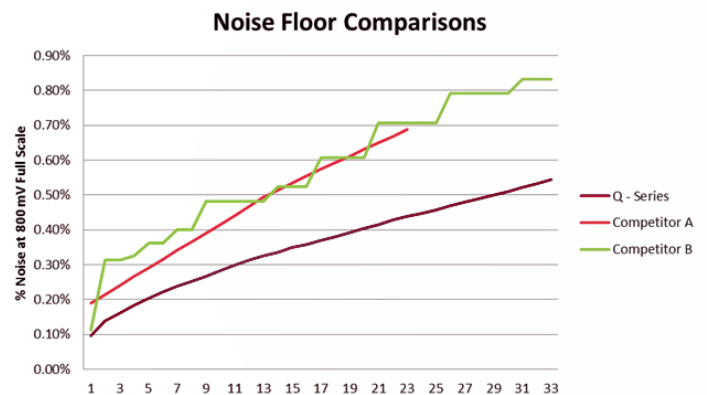

Industry’s First 30 GHz Oscilloscope Probing System

To take advantage of your investment in a high bandwidth oscilloscope, you must have a probing system that can deliver bandwidth to the probe tip. Keysight rises to the challenge of high speed signal reproduction with these probing innovations:


- InfiniiMax III high-frequency probes with automatic AC calibration (PrecisionProbe)
- The industry’s first bandwidth upgradable probe amplifier
- Fully-integrated probe amplifier s-parameter correction

Model	Description
N2803A	30 GHz probe amp
N2802A	25 GHz probe amp
N2801A	20 GHz probe amp
N2800A	16 GHz probe amp




The InfiniiMax III 30 GHz probing system includes accessories to enable probing with a ZIF tip, browsing, or connecting to 3.5 mm inputs.

Industry’s First 30 GHz Oscilloscope Probing System

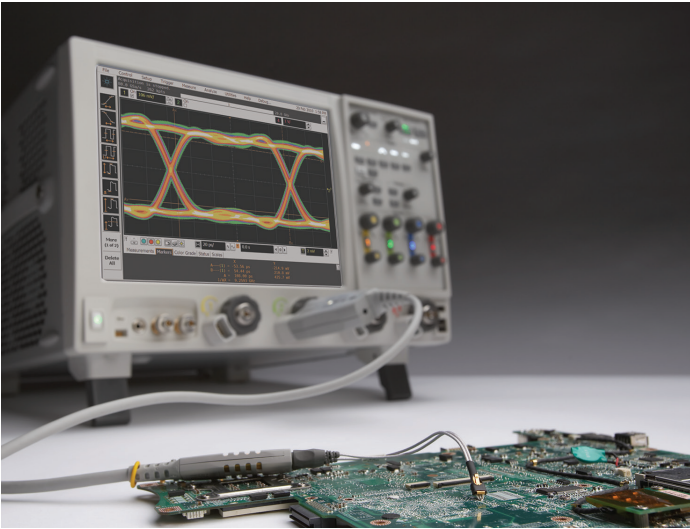


Fully-integrated probe amplifier s-parameter correction

Each InfiniiMax III probe amplifier comes pre-packaged with its own customized characteristics via s-parameter files. The InfiniiMax III probing system and the 90000L Series communicate via an I²C bus. This communication allows the 90000L Series to download the customized s-parameter files from the InfiniiMax III probing amplifier to the scope for greater accuracy.

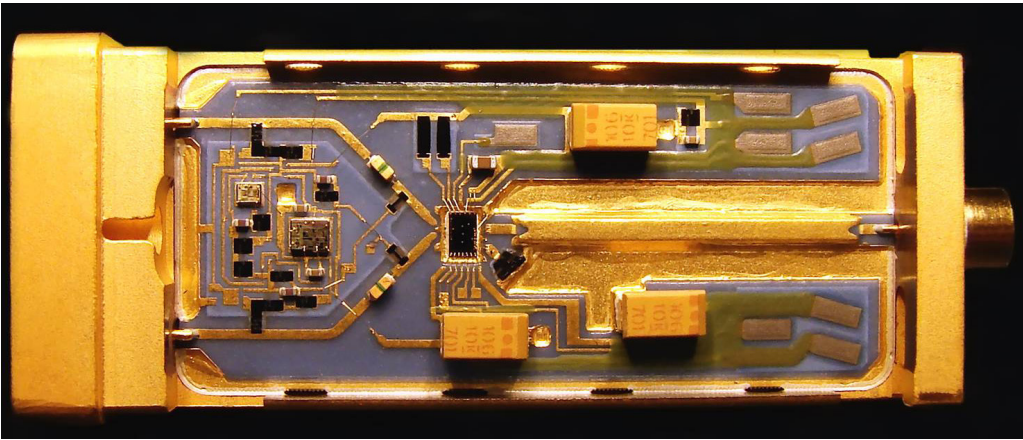

The InfiniiMax III probing system uses the same InP technology that enables high bandwidth and low noise oscilloscope measurements.

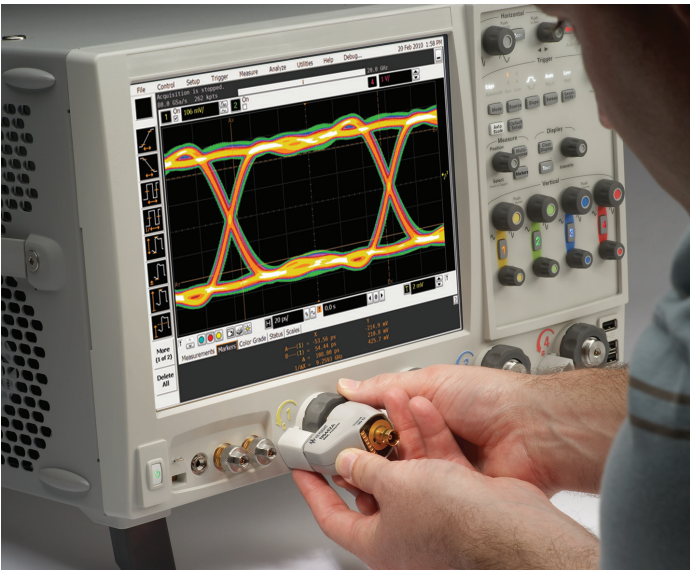

Industry’s only bandwidth upgradable probes

Purchase the probing performance you need today with confidence that you have headroom for the future with Keysight’s InfiniiMax III bandwidth upgradable probes. Upgrade to higher performance at a fraction of the cost of new probes as your needs evolve.

Bandwidth upgrades	
N5446A-001	16 to 20 GHz bandwidth upgrade
N5446A-002	20 to 25 GHz bandwidth upgrade
N5446A-003	25 to 30 GHz bandwidth upgrade
N5446A-004	16 to 25 GHz bandwidth upgrade
N5446A-005	16 to 30 GHz bandwidth upgrade
N5446A-006	20 to 30 GHz bandwidth upgrade

The Industry's Most Comprehensive Application-Specific Measurement Software


To get the most out of your Keysight Infiniium 90000L Series oscilloscope, choose from a wide array of application specific software options that speed your measurement tasks including:

- A broad range of jitter, triggering, measurement, analysis and display tools
- Pre-built compliance testing software based on the expertise of our engineers on the standards committees
- Support for emerging high speed serial buses including SAS 12G, FibreChannel, and PCIe® gen3

A broad range of jitter, trigger, measurement, analysis, and display tools

When time is of the essence you need your scope to acquire and present data in the most usable form so you can get to answers quickly.


The Keysight Infiniium 90000L Series oscilloscopes offer the industry's widest range of supporting software with an intuitive interface to simplify learning curves. Can be found in the configuration guide.

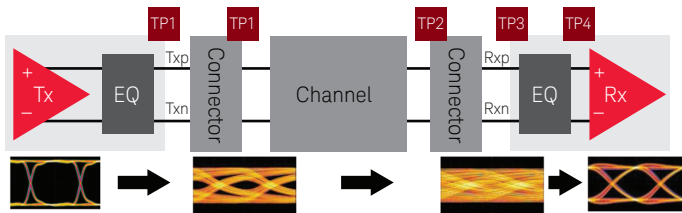


Keysight's InfiniiSim waveform translation toolset provides efficient de-embedding of probe and circuit element loading, enables measurement translation from accessible probe points to other locations in the system, and simulates waveforms with channel models inserted. Combine measurements and models for accurate characterization of design performance, all done with hardware acceleration for fast update rates.

Not just a tool for the digital world

Infiniium built-in FFT allows users to quickly and easily analyze the frequency components of their signals. Both FFT magnitude and phase can be displayed and can be combined with other built-in math functions or MATLAB based measurements. Standard windowing of Hanning, Blackman Harris, Flattop and Rectangular are supported along with cursor based power measurements. When more powerful frequency domain measurements are required, including modulation analysis, consider the Keysight 89601A Vector Signal Analyzer software.

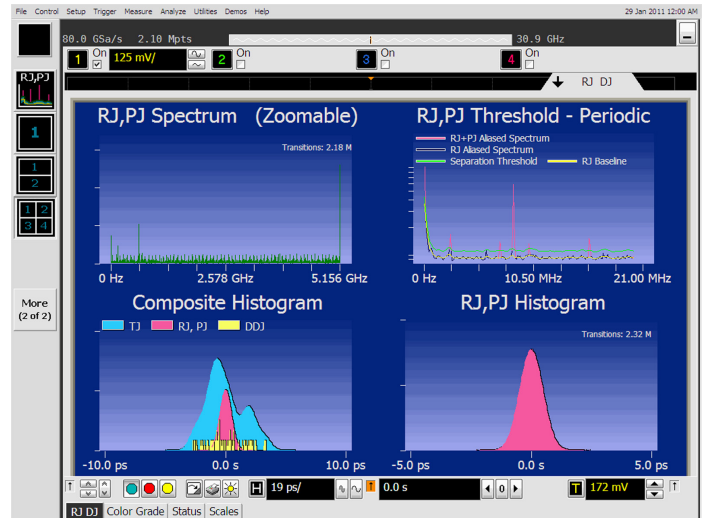


Quickly characterize jitter and display histograms, measurement trending, and jitter spectrum.

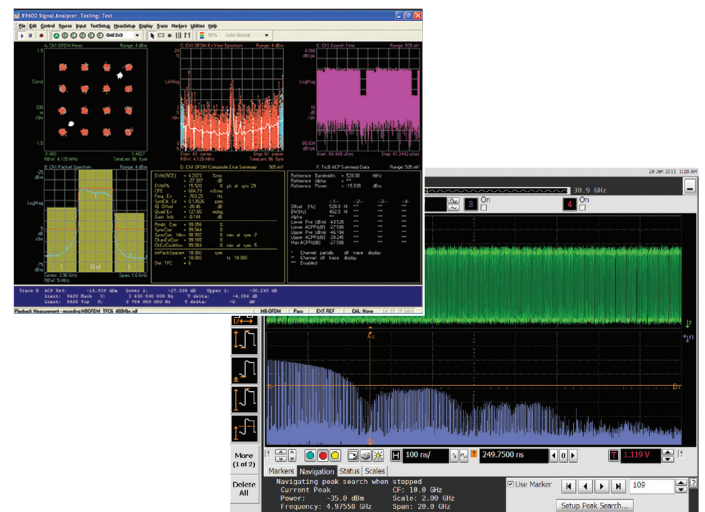

The Industry's Most Comprehensive Application-Specific Measurement Software

Pre-built compliance testing software with Keysight expertise

Choose from the industry's widest range of complete applications for compliance and margin testing for high speed serial buses, including SATA, SAS, PCI Express, Ethernet, USB, JEDEC and more. Keysight's measurement experts sit on the industry standards committees and help define compliance requirements. They ensure that our tools deliver to the standards. Set up wizards combined with intelligent test filtering give you confidence you're running the right tests. Comprehensive HTML reports with visual documentation and pass/fail results guarantee that critical information is retained on each test. Technicians can run complete and accurate testing on their own, freeing valuable engineering resources.

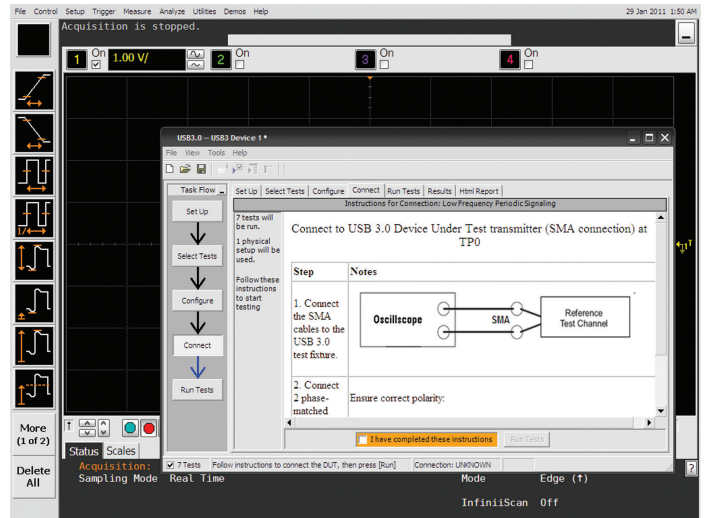

Support for proprietary and emerging high speed serial buses

Keysight engineers hold key positions within the governing bodies defining test requirements for interoperability on emerging high speed serial buses. We provide tools as quickly as possible on emerging standards.




User Defined Application software allows automated compliance testing on proprietary buses or while emerging test standards solidify

Rapidly develop automated measurements for compliance testing with Keysight's User Defined Application software. This tool provides the framework you need to quickly program and automate any set of measurements with an interface similar to that provided in our standard compliance test software. Full control of other Keysight instrumentation is possible, along with automated HTML reporting capabilities.


Applications are available today for:

- MIPI M-PHY
- MDDI
- GDDR5
- SAS 6G

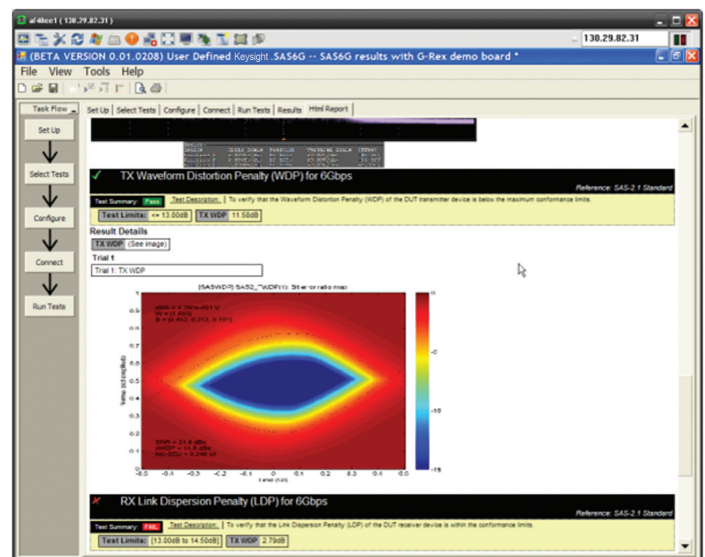

Keysight Infiniium Portfolio

Keysight’s Infiniium lineup includes bandwidths from 600 MHz to 32 GHz. Use the following selection guide to determine which best matches your specific needs.

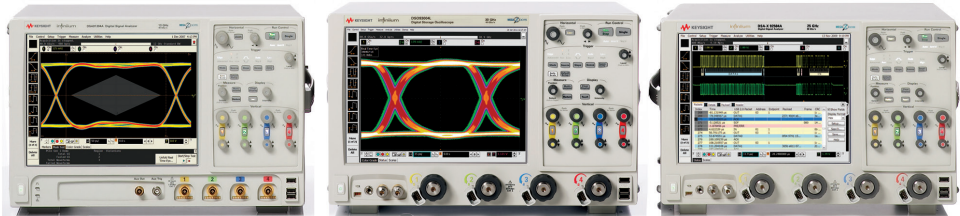

Oscilloscope	90000A Series	90000L Series	90000 X-Series
Type	Real time	Real time	Real time
Bandwidth	2.5 to 13 GHz	30 GHz	16 to 32 GHz
Sampling rate (2 ch/4 ch)	40/40 GSa/s	80/40 GSa/s	80/40 GSa/s
Memory depth	Up to 1 Gpts	Up to 500 Mpts	Up to 2 Gpts
Size (H x W x D)	11.1" x 17" x 19.9" 28 cm x 43 cm x 51 cm	10.5" x 16.75" x 18.7" 27 cm x 43 cm x 48 cm	10.5" x 16.75" x 18.7" 27 cm x 43 cm x 48 cm
De-embedding	Yes	Yes	Yes
Data sheet	5989-7819EN	5990-7368EN	5990-5271EN

Configure Your High Performance Real-Time Oscilloscope Solution Today

Get the most out of your oscilloscope investment by choosing options and software to speed your most common tasks. Configure your Infiniium 90000L Series oscilloscope in three easy steps. Use option numbers when ordering at time of purchase. Use model numbers to add to an existing scope.

1. Choose your oscilloscope, memory and options

Mainframe:

Oscilloscopes	Description
DSA93004L	30 GHz digital signal analyzer
DSO93004L	30 GHz digital signal oscilloscope

All models come with power cord, keyboard, mouse, stylus, calibration cable, wrench and (5) coax adapters. ¹

1. DSA models come with 50 Mpts memory, EZJIT, EZJIT+, Noise Reduction, and Serial Data Analysis standard.

Memory:

Description	Options	Model number
20 Mpts/ch memory	Standard	N2810A-020
50 Mpts/ch memory	DSOX90000A-050	N2810A-050
100 Mpts/ch memory	DSOX90000A-100	N2810A-100
200 Mpts/ch memory	DSOX90000A-200	N2810A-200
500 Mpts/ch memory	DSOX90000A-500	N2810A-500

Options:

Description	Options	Model number
GPIO card-interface	DSOX90000-805	82350B
PCI Express card-interface	DSOX90000-823	N4866A
Performance verification de-skew fixture	DSOX90000-OC-PROBES	N5443A
Rack mount kit option	DSOX90000-1CM	N5470A
Removable hard drive	DSOX90000-801	N5474A

Engineered for 32 GHz True Analog Bandwidth That Delivers

Configure your high performance real-time oscilloscope solution today

2. Choose your probes and accessories

Description	Oscilloscopes
30 GHz InfiniiMax III probe amp	N2803A
25 GHz InfiniiMax III probe amp	N2802A
20 GHz InfiniiMax III probe amp	N2801A
16 GHz InfiniiMax III probe amp	N2800A
ZIF probe head	N5439A
Browser (hand held) probe head	N5445A
Solder-in probe head	N5441A
3.5 mm/2.92-mm/SMA probe head	N5444A
450 Ω ZIF tip replacement (set of 5)	N5440A
250 Ω ZIF tip replacement (set of 5)	N5447A
Browser tip replacement (set of 4)	N5476A
PV/des skew fixture	N5443A
Precision BNC adapter (50 Ω)	N5442A
Sampling scope adapter	N5477A
2.92 mm head flex cable	N5448A
High impedance probe adapter	N5449A
35 GHz differential cable pair	N5412A

For more information about Keysight's InfiniiMax III probing system, check out the InfiniiMax III data sheet with the Keysight literature number, 5990-5653EN.

3. Choose your measurement-specific application software

Measurement, analysis and decode software packages

Description	Product number	Model number
CAN/FlexRay decode	DSOX90000-063	N8803A
EZJIT jitter analysis software	DSOX90000-002	E2681A
EZJIT Plus jitter analysis software	DSOX90000-004	N5400A
High-speed SDA and clock recovery	DSOX90000-003	E2688A
I ² C/SPI decode	DSOX90000-007	N5391A
InfiniiScan software triggering	DSOX90000-009	N5414B
InfiniiSim basic signal de-embedding	DSOX90000-013	N5465A-001
InfiniiSim advanced signal de-embedding	DSOX90000-014	N5465A-002
Serial data equalization	DSOX90000-012	N5461A
MATLAB - Basic digital analysis package	DSOX90000-061	N8831A-001
MATLAB - Standard digital analysis package	DSOX90000-062	N8831A-002
MIPI D-PHY SM protocol	DSOX90000-019	N8802A
PCI-Express protocol	DSOX90000-017	N5463A
Remote programming interface	DSOX90000-011	N5452A
RS-232/UART decode	DSOX90000-015	N5462A
SATA/SAS protocol	DSOX90000-018	N8801A
USB protocol	DSOX90000-016	N5464A
User-defined function	DSOX90000-010	N5430A

Engineered for 32 GHz True Analog Bandwidth That Delivers (Continued)

Configure your high performance real-time oscilloscope solution today

Compliance testing and validation software packages

Description	Product number	Model number
DDR1 and LPDDR compliance	DSOX90000A-031	U7233A
DDR2 and LPDDR2 compliance	DSOX90000A-033	N5413B
DDR3 up to 1660 MHz compliance	DSOX90000A-032	U7231A
DisplayPort compliance application	DSOX90000A-028	U7232A
Ethernet compliance application	DSOX90000A-021	N5392A
HDMI compliance application	DSOX90000A-023	N5399A
MIPI D-PHY compliance application	DSOX90000A-035	U7238A
PCI EXPRESS compliance application	DSOX90000A-022	N5393B
SAS compliance application	DSOX90000A-027	N5412C
SATA 6 Gb/s compliance	DSOX90000A-038	N5411B
USB 3.0 compliance software	DSOX90000A-041	U7243A
User defined application	DSOX90000A-040	N5467A
XAUI compliance application		N5431A
10GBASE-T Ethernet automated test application	DSOX90000A-036	U7236A

Choose your application-specific software packages (see pages 20 to 22) for details.

Infiniium 90000L Series Oscilloscopes

Performance characteristics

Vertical				
Input channels	Four			
Analog bandwidth (–3 dB) ¹	93004L			
2 channel	30 GHz			
4 channel	16 GHz			
Rise time/fall time ²	93004L			
10 to 90%	13.5 ps			
20 to 80%	11 ps			
Input impedance	50 Ω, ± 3%			
Sensitivity ⁴	1 mV/div to 1 V/div			
Input coupling	DC			
Vertical resolution ³	8 bits, ≥ 12 bits with averaging			
Channel to channel isolation	DC to 3 GHz: 60 dB (≥ 1000:1)			
(any two channels with equal	3 to 8 GHz: 40 dB (≥ 100:1)			
V/div settings)	8 GHz to BW: 35 dB (≥ 56:1)			
DC gain accuracy ¹	± 2% of full scale at full resolution channel scale (± 2.5% for 5mV/div)			
Maximum input voltage ¹	± 5 V			
Offset range	Vertical sensitivity	Available offset		
	0 mV/div to ≥ 49 mV/div	± 0.4 V		
	> 50 mV/div to ≥ 100 mV/div	± 0.7 V		
	> 100 mV/div to ≥ 199 mV/div	± 1.2 V		
	> 200 mV/div to ≥ 499 mV/div	± 2.2 V		
	> 500 mV/div	± 2.4 V		
Offset accuracy	≤ 3.5 V: ± (2% of channel offset + 1% of full scale + 1 mV)			
	> 3.5 V: ± (2% of channel offset + 1% of full scale)			
Dynamic range	± 4 div from center screen			
DC voltage measurement accuracy	Dual cursor: ± [(DC gain accuracy) + (resolution)]			
	Single cursor: ± [(DC gain accuracy) + (offset accuracy) + (resolution/2)]			
RMS noise floor (scope only)				
Volts/div (mVrms)	16 GHz	20 GHz	25 GHz	30 GHz
20	1	1.1	1.2	1.4
50	2.3	2.6	2.9	3.2
100	4.6	5.1	5.7	6.3
200	9.6	10.7	12.1	13.3

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm up period, and \pm 5° C from annual calibration temperature.
2. Full scale is defined as 8 vertical divisions. Magnification is used below 10 mV/div. Below 10 mV/div, full-scale is defined as 80 mV/div. The major scale settings are 5 mV, 10 mV, 20 mV, 50 mV, 100 mV, 200 mV, 500 mV, and 1 V.
3. Vertical resolution for 8 bits = 0.4% of full scale, for 12 bits = 0.024% of full scale.
4. Calculated from the bandwidth using 0.42/bandwidth.

Infiniium 90000L Series Oscilloscopes (Continued)

Performance characteristics (Continued)

Horizontal			
Main timebase range	2 ps/div to 20 s/div real-time		
Main timebase delay range	200 s to –200 s real-time		
Zoom timebase range	1 ps/div to current main time scale setting		
Channel deskew	± 1 ms range, 10 fs resolution		
Time scale accuracy ¹	[± 0.075 ppm (immediately after calibration), ± 0.1 ppm/year (aging)]		
Delta-time measurement accuracy			
Absolute, averaging disabled	$5 \cdot \sqrt{\left(\frac{Noise}{SlewRate}\right)^2 + SampleClock\ Jitter^2} + \frac{TimeScaleAccy\ Reading}{2} \text{ sec rms}$		
Absolute, > –56 averages	$0.35 \cdot \sqrt{\left(\frac{Noise}{SlewRate}\right)^2 + SampleClock\ Jitter^2} + \frac{TimeScaleAccy\ Reading}{2} \text{ sec rms}$		
Sample clock jitter	Acquired time range	Internal timebase reference	External timebase reference
	10 ms	150 rms	150 fs rms
	10 to 100 ms	190 fs rms	190 fs rms
	100 ms to 1 sec	500 fs rms	190 fs rms
	> 1 sec		190 fs rms
Jitter measurement floor (6a, 6b, 6c)	TIE: $\sqrt{\left(\frac{Noise}{SlewRate}\right)^2 + SampleClock\ Jitter^2} \text{ sec rms}$ Periodic Jitter: $\sqrt{2} \cdot \sqrt{\left(\frac{Noise}{SlewRate}\right)^2 + SampleClock\ Jitter^2} \text{ sec rms}$ Cycle-Cycle: $\sqrt{3} \cdot \sqrt{\left(\frac{Noise}{SlewRate}\right)^2 + SampleClock\ Jitter^2} \text{ sec rms}$		

1. Denotes warranted specifications, all others are typical. Specifications are valid after a 30-minute warm up period and ± 5° C from annual calibration temperature.

Infiniium 90000L Series Oscilloscopes (Continued)

Performance characteristics (Continued)

Acquisition		
Maximum real-time sample rate	93004L	
2 channels	80 GSa/s	
4 channels	40 GSa/s	
Memory depth per channel		
Standard	20 Mpts on 4 channels	40 Mpts on 2 channels
Option 050	50 Mpts on 4 channels (standard on DSA models)	100 Mpts on 2 channels
Option 100	100 Mpts on 4 channels	100 Mpts on 2 channels
Option 200	200 Mpts on 4 channels	400 Mpts on 2 channels
Option 500	500 Mpts on 4 channels	1 Gpt on 2 channels
Maximum acquired time at highest real time resolution		
Real-time resolution	40 Gsa/s	80 Gsa/s
Standard	0.5 mS	0.5 mS
Option 050	1.25 mS	1.25 mS
Option 100 M	2.5 mS	2.5 mS
Option 200 M	5 mS	5 mS
Option 500 M	12.5 mS	12.5 mS
Sampling modes		
Real-time	Successive single shot acquisitions	
Real-time with averaging	Selectable from 2 to 65534	
Real-time with peak detect	80 GSa/s in half channel mode, 40 GSa/s in full channel mode	
Real-time with Hi resolution	Real-time boxcar averaging reduces random noise and increases resolution	
Roll mode	Scrolls sequential waveform points across the display in a right-to-left rolling motion. Works at sample rates up to 10 MSa/s with a maximum record length of 40 MPts	
Segmented memory	Captures bursting signals at max sample rate without consuming memory during periods of inactivity	
	Number of segments (Up to 524,288 with Option 026)	
	Maximum time between triggers is 562,950 seconds	
	Re-arm time: 4.5 μ s	
Filters	Maximum memory depth: Up to 4 Gpts in 1/2 channel mode with Option 02G	
Sin(x)/x interpolation	On/off selectable FIR digital filter. Digital signal processing adds points between acquired data points to enhance measurement accuracy and waveform display	

Infiniium 90000L Series Oscilloscopes (Continued)

Performance characteristics (Continued)

Hardware trigger	
Sensitivity	Internal low
	Internal high
	Auxiliary
Edge trigger bandwidth	> 20 GHz
Minimum pulse width trigger	
Hardware	250 ps
Software (InfiniiScan)	40 ps
Level range	
Internal	± 4 div from center screen or ± 4 V, whichever is smallest
Auxiliary	± 5 V, also limit input signal to ± 5 V
Sweep modes	Single, segmented, and continuous
Display jitter (displayed trigger jitter)	50 fs
Trigger sources	Channel 1, Channel 2, Channel 3, Channel 4, aux, and line
Trigger modes	
Edge	Triggers on a specified slope (rising, falling or alternating between rising and falling) and voltage level on any channel or auxiliary trigger. Edge trigger bandwidth is > 20 GHz.
Edge transition	Trigger on rising or falling edges that cross two voltage levels in > or < the amount of time specified. Edge transition setting from 250 ps.
Edge then edge (time)	The trigger is qualified by an edge. After a specified time delay between 10 ns to 10 s, a rising or falling edge on any one selected input will generate the trigger.
Edge then edge (Event)	The trigger is qualified by an edge. After a specified delay between 1 to 16,000,000 rising or falling edges, another rising or falling edge on any one selected input will generate the trigger.
Glitch	Triggers on glitches narrower than the other pulses in your waveform by specifying a width less than your narrowest pulse and a polarity. Triggers on glitches as narrow as 125 ps. Glitch range settings: < 250 ps to < 10 s.
Line	Triggers on the line voltage powering the oscilloscope
Pulse width	Trigger on a pulse that is wider or narrower than the other pulses in your waveform by specifying a pulse width and a polarity. Triggers on pulse widths as narrow as 125 ps. Pulse width range settings 250 ps to 10 s. Trigger point can be “end of pulse” or “time out”.
Runt	Triggers on a pulse that crosses one threshold but fails to cross a second threshold before crossing the first again. Can be time qualified with minimum setting of 250 ps.

Infiniium 90000L Series Oscilloscopes (Continued)

Performance characteristics (Continued)

Hardware trigger (Continued)	
Timeout	Triggers when a channel stays high, low, or unchanged for too long. Timeout setting: from 250 ps to 10 s.
Pattern/pulse range	Triggers when a specified logical combination of the channels is entered, exited, present for a specified period of time or is within a specified time range or times out. Each channel can have a value of High (H), Low (L) or Don't care (X).
State	Pattern trigger clocked by the rising, falling or alternating between rising and falling edge of one channel
Window	Triggers on an event associated with a window defined by two-user adjustable thresholds. Event can be window "entered," "exited," "inside (time qualified)," or "outside (time qualified)" voltage range. Trigger point can be "cross window boundary" or "time out." Time qualify range: from 250 ps to 10 s.
Video	Triggers from negative sync composite video, field 1, field 2, or alternating fields for interlaced systems, any field, specific line, or any line for interlaced or non-interlaced systems. Supports NTSC, PAL-M (525/60), PAL, SECAM (625/50), EDTV (480p/60), EDTV (576p/50), HDTV (720p/60), HDTV (720p/50), HDTV (1080i/60), HDTV (1080i/50), HDTV (1080p/60), HDTV (1080p/50), HDTV (1080p/30), HDTV (1080p/25), HDTV (1080p/24), and user-defined formats.
Trigger sequences	Three stage trigger sequences including two-stage hardware (Find event (A) and Trigger event (B)) and one-stage InfiniiScan software trigger. Supports all hardware trigger modes except "edge then edge" and "video," and all InfiniiScan software trigger modes. Supports "delay (by time)" and "reset (by time or event)" between two hardware sequences. The minimum latency between "find event (A)" and "trigger event (B)" is 3 ns.
Trigger qualification and qualifier	Single or multiple channels may be logically qualified with any other trigger mode
Trigger holdoff range	100 nS to 10 s
Trigger actions	Specify an action to occur and the frequency of the action when a trigger condition occurs. Actions include e-mail on trigger and execute "multipurpose" user setting.
Software trigger (requires InfiniiScan event identification software – Option 009)	
Trigger modes	
Zone qualify	Software triggers on the user defined zones on screen. Zones can be specified as either "must intersect" or "must not intersect." Up to eight zones can be defined across multiple channels.
Generic serial	Software triggers on NRZ-encoded data up to 8.0 Gbps, up to 80-bit pattern. Support multiple clock data recovery methods including constant frequency, 1st-order PLL, 2nd-order PLL, explicit clock, explicit 1st-order PLL, explicit 2nd-order PLL, Fibre Channel, FlexRay receiver, FlexRay transmitter (requires E2688A except for the constant frequency clock data recovery mode).
Measurement limit	Software triggers on the results of the measurement values. For example, when the "pulse width" measurement is turned on, InfiniiScan measurement software trigger triggers on a glitch as narrow as 75 ps. When the "time interval error (TIE)" is measured, InfiniiScan can trigger on a specific TIE value.
Non-monotonic edge	Software triggers on the non-monotonic edge. The non-monotonic edge is specified by setting a hysteresis value.
Runt	Software triggers on a pulse that crosses one threshold but fails to cross a second threshold before crossing the first again. Unlike hardware runt trigger, InfiniiScan runt trigger can be further qualified via a hysteresis value.

Infiniium 90000L Series Oscilloscopes (Continued)

Performance characteristics (Continued)


Hardware trigger (Continued)	
Maximum measurement update rate	> 50,000 measurement/sec (one measurement turned on) > 250,000 measurement/sec/measurement (ten measurements turned on)
Measurement modes	Standard, measure all edges mode
Waveform measurements	Peak to peak, minimum, maximum, average, RMS, amplitude, base, top, overshoot, preshoot, upper, middle, lower, overshoot, V preshoot, crossing, Pulse base, pulse amplitude, burst interval
Time	Rise time, fall time, positive width, negative width, burst width, Tmin, Tmax, burst period, Tvolt, + pulse count, - pulse count
Clock	Period, frequency, duty cycle to duty cycle
Data	Setup time, hold time
Mixed	Area, slew rate
Frequency domain	FFT frequency, FFT magnitude, FFT delta frequency, FFT delta magnitude, peak detect mode
Level qualification	Any channels that are not involved in a measurement can be used to level-qualify all timing measurements
Eye-diagram measurements	Eye height, eye width, eye jitter, crossing percentage, Q factor, and duty-cycle distortion
Jitter analysis measurements	Requires Option 002 (or E2681A) or 004 (or N5400A). Standard on DSA Series
Clock	Time interval error, N-period, period to period, positive width to positive width, neg width to neg width, and duty cycle to duty cycle
Data	Time interval error, unit interval, N Unit Interval, unit interval to unit interval, Data rate, CDR, de-emphasis
Statistics	Displays the current, mean, minimum, maximum, range (max-min), standard deviation, number of measurements value for the displayed automatic measurements
Histograms	
Source	Waveform or measurement
Orientation	Vertical (for timing and jitter measurements) or horizontal (noise and amplitude change) modes, regions are defined using waveform markers
Measurements	Mean, standard deviation, mean \pm 1, 2, and 3 sigma, median, mode, peak-to-peak, min, max, total hits, peak (area of most hits), X scale hits, and X offset hits
Mask testing	Allows pass/fail testing to user-defined or Keysight-supplied waveform templates. Automask lets you create a mask template from a captured waveform and define a tolerance range in time/voltage or screen divisions. Test modes (run until) include test forever, test to specified time or event limit, and stop on failure. Executes “multipurpose” user setting on failure. “Unfold real time eye” feature will allow individual bit errors to be observed by unfolding a real time eye when clock recovery is on. Communications mask test kit option provides a set of ITU-T G.703, ANSI T1.102, and IEEE 802.3 industry-standard masks for compliance testing.
Waveform math	
Number of functions	Four
Hardware accelerated math	Differential and common mode
Operations	Absolute value, add, average, Butterworth ¹ , common mode, differentiate, divide, FFT magnitude, FFT phase, FIR ¹ , high pass filter, integrate, invert, LFE ¹ , low pass filter (4th-order Bessel Thompson filter), magnify, max, min, multiply, RT Eye ¹ , smoothing, SqrtSumOfSquare ¹ , square, square root, subtract, versus, and optional user defined function (Option 010)
FFT	
Frequency range	DC to 40 GHz (at 80 GSa/s) or 20 GHz (at 40 GSa/s)
Frequency resolution	Sample rate/memory depth = resolution
Window modes	Hanning, flattop, rectangular, Blackman-Harris

1. Requires MATLAB (Option N8831A) software and user-defined function (Option N5430A) software.

Infiniium 90000L Series Oscilloscopes (Continued)

Performance characteristics (Continued)

Measurement modes	
Automatic measurements	Measure menu access to all measurements, up to ten measurements can be displayed simultaneously
Multipurpose	Front-panel button activates five pre-selected or five user-defined automatic measurements
Drag-and-drop measurement toolbar	Measurement toolbar with common measurement icons that can be dragged and dropped onto the displayed waveforms
Snapshot	Takes 29 snap shot measurements (customizable)
Marker modes	Manual markers, track waveform data, track measurements
Display	
Display	12.1-inch color XGA TFT-LCD with touch screen
Intensity grayscale	256-level intensity-graded display
Resolution XGA	1024 pixels horizontally x 768 pixels vertically
Annotation	Up to 12 labels, with up to 100 characters each, can be inserted into the waveform area
Grids	One, two or four waveform grids, each with 8 bit vertical resolution
Waveform styles	Connected dots, dots, infinite persistence, color graded infinite persistence. Includes up to 256 levels of intensity-graded waveforms.
Waveform update rate	> 400,000 waveforms per second (when in the segment memory mode)
Maximum update rate	
Computer system and peripherals, I/O ports	
Computer system and peripherals	
Operating system	Windows XP Pro
CPU	Intel Core 2 Duo 3.06 GHz
PC system memory	4 GB DDR2
Drives	≥ 250-GB internal hard drive Optional removable hard drive (Option 801) Optional USB external DVD-RW drive (Option 820)
Peripherals	Logitech optical USB mouse, compact USB keyboard and stylus supplied. All Infiniium models support any Windows-compatible input device with a serial, PS/2 or USB interface.
File types	
Waveforms	Compressed internal format (*.wfm (200 Mpts)), comma-separated values (*.csv (2 Gpts)), tab separated values (*.tsv (2 Gpts)), public binary format (.bin (500 Mpts)), Y value files (*.txt (2 Gpts)), hierarchal data file (*.h5 (2 Gpts)) BMP, PNG, TIFF, GIF or JPEG
Images	
I/O ports	PCIe x4, GPIB, RS-232 (serial), parallel, PS/2, USB 2.0 hi-speed (host), USB 2.0 hi-speed (device), dual-monitor video output, auxiliary output, trigger output, time base reference output
General characteristics	
Temperature	Operating: 5 °C to + 40 °C; Non-operating: –40°C to +70 °C
Vibration	For operating random the 0.3 g(rms) should be 0.21 g(rms), for non-operating random the 2.41 g(rms) should be 2.0 g(rms) and for swept sins the (0.75 g) should be (0.50 g).
Power	100 to 240 VAC at 50/60 Hz; maximum input power 800 W
Weight	45.1 lbs (20.5 kg)
Dimensions	10.5" x 16.75" x 18.7" (27 cm x 43 cm x 48 cm)
Safety	Meets IEC 61010-1 +A2, CSA certified to C22.2 No.1010.1, self-certified to UL 3111

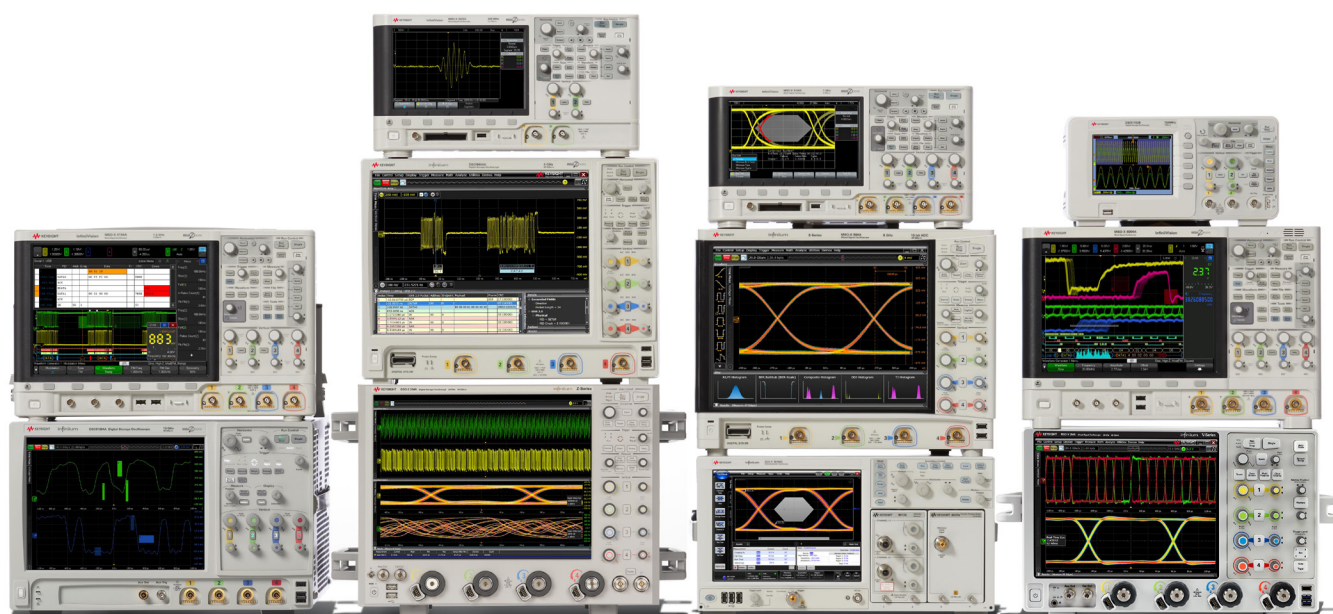

Keysight Oscilloscopes

Multiple form factors from 20 MHz to >90 GHz | Industry leading specs | Powerful applications



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.




www.pxisa.org

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

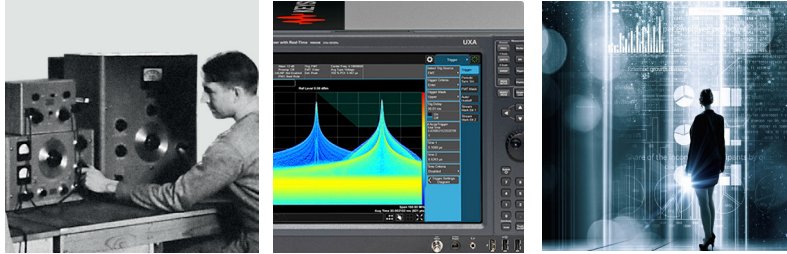

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



Unlocking Measurement Insights

This information is subject to change without notice.

© Keysight Technologies, 2017

Published in USA, December 1, 2017

5990-7368EN

www.keysight.com