

# Keysight M9302A PXI Local Oscillator 3 GHz to 10 GHz

Data Sheet



# Overview

## Introduction

The Keysight Technologies, Inc. M9302A PXI Local Oscillator (LO) is optimized for fast settling time to allow for fast frequency down conversion in Aerospace and Defense applications such as radar and wideband signal capture, and in wireless communications applications.

## Product description

The M9302A is a two-slot 3U PXI VCO-based 3 GHz to 10 GHz LO. The fast switching time and low phase noise of this LO make it an ideal component of a microwave vector signal analyzer.

When integrated in the Keysight M9392A PXI Vector Signal Analyzer, and combined with the 89600 VSA software, the M9302A becomes a part of a complete signal analysis solution enabling analysis of communications, radar and avionics signals to 26.5 GHz in a modular open-system standard.

## Applications

- Aerospace and defense
- Wireless communications
- Radar and wideband signal capture

## Features

- Frequency range: 3 GHz to 10 GHz
- 0.1 Hz tuning resolution
- 1 ms settling time
- Phase Noise: -115 dBc/Hz at 10 GHz, 10 kHz offset
- Chassis slot compatibility: cPCI(J1), PXI-1, PXIe Hybrid
- PXI form factor

## Customer values

- Tuning resolution provides greater frequency accuracy
- 1 ms settling time speeds up your test time
- Multiple programmatic interfaces enable easy integration into existing test environments and reduced development time
- Included drivers, soft front panels and programming examples in Visual Studio (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, and MATLAB
- Conforms to Modular Open Systems Approach (MOSA)

## Hardware platform

### Compliance

The M9302A is PXI compliant, using either a cPCI(J1), PXI-1, or PXIe Hybrid slot. Designed to benefit from fast data interfaces, the products can be integrated with other test and automation modules in cPCI(J1), PXI-1, or PXIe Hybrid chassis slots. The PXI format offers high performance in a small, rugged package. It is an ideal deployment platform for many automated test systems.

A wide array of complementary PXI products are currently available. Products include multimeters, waveform generators, local oscillators, digitizers, and switch multiplexers.

## Software platform

### IO libraries

Keysight IO Libraries Suite offers FAST and EASY connection to instruments and the newest version extends that capability to include modular instruments.

The Keysight IO Libraries Suite helps you display ALL of the modules in your system, whether they are PXI, PXIe, or PCIe. From here you can view information about the installed software or start the module's soft front panel. Launch the module's soft front panel directly from Keysight Connection Expert. Find the right driver from Keysight Connection Expert.

### Drivers

Keysight provides instrument drivers that work with your choice of software that saves time and preserves software and hardware investments. Keysight modular instruments come with IVI-COM, IVI-C, LabVIEW and MATLAB software drivers that work in the most popular T&M development environments including, Visual Studio (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, and MATLAB.

With the multiple drivers included and minimum software adjustments, any Keysight PXI local oscillator can be swapped out, replaced, or upgraded with the latest PXI local oscillator.

## Easy software integration

Included are application code examples for VisualStudio (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, and MATLAB which provide local oscillator set-up and basic acquisition functionality. These application code examples are easily modified to quickly integrate the module into your measurement system.

## Software applications

Keysight soft front panels provide easy to use instrument communications for diagnostics and basic hardware setup. The M9302A's graphical user interface guides developers through module setup. Users can quickly configure the instrument parameters. More sophisticated functions are available through the instrument's numerous programmatic interfaces. The M9302A supports interfaces for Visual Studio, MATLAB, and LabVIEW. The interfaces are implemented using the IVI standard supporting both IVI-COM and IVI-C.


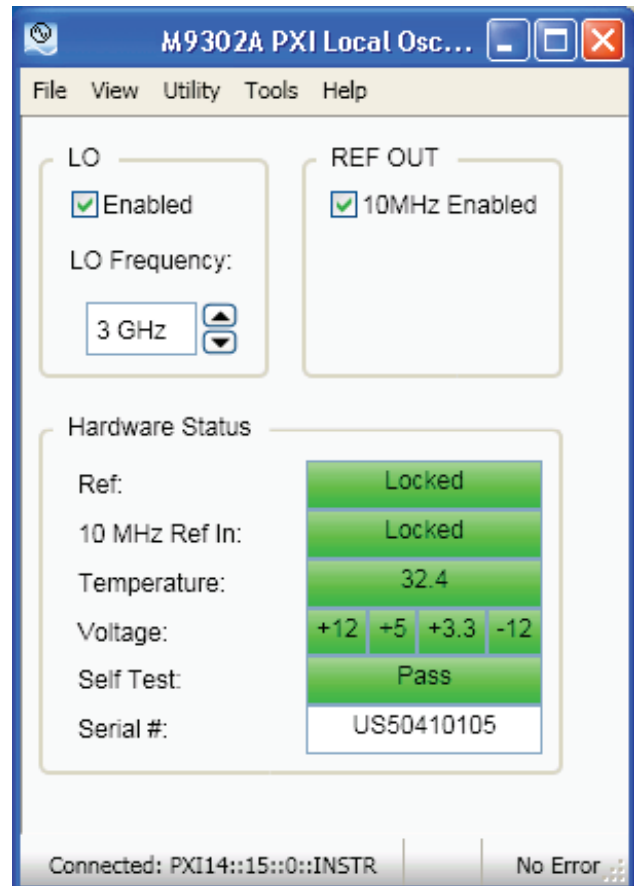


Figure 1. Keysight M9302A PXI Local Oscillator, software interface

The M9302A is factory calibrated and shipped with an ISO-9002, NIST-traceable calibration certificate. A one year calibration cycle is recommended.

## Technical Specifications and Characteristics

Output specifications		
Frequency range	3 GHz to 10 GHz (under range to 2.75 GHz) <sup>1</sup>	
Frequency step size resolution	0.1 Hz	
Frequency switching speed (to within 0.1 ppm of final frequency or within 100 Hz, whichever is greater)	1 ms, 500 $\mu$ s typical	
Power	+16 dBm $\pm$ 2 dB	
Impedance	50 $\Omega$ , nominal	
Spectral purity		
Harmonics	2.75 GHz to 6 GHz	-14 dBc <sup>2</sup>
	6 GHz to 10 GHz	-10 dBc <sup>2</sup>
Non-Harmonic spurious	-70 dBc, nominal	
Phase noise	-115 dBc/Hz at 10 GHz, 10 kHz offset	
Power line related spurious	-40 dBc min, nominal	

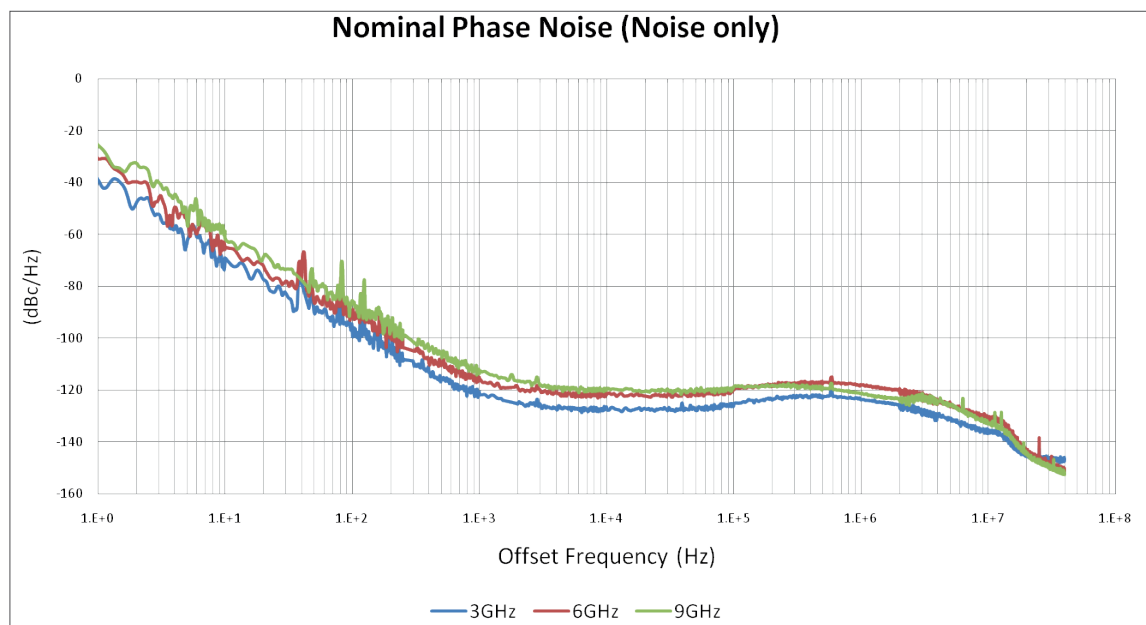

Reference frequency specifications		
Frequency output	REF OUT	10 MHz, nominal
	REF 1 OUT	100 MHz, nominal
	REF 2 OUT	100 MHz, nominal
Amplitude	REF OUT	0 dBm $\pm$ 3 dB <sup>1</sup>
	REF 1 OUT	0 dBm $\pm$ 3 dB <sup>1</sup>
	REF 2 OUT	0 dBm $\pm$ 3 dB <sup>1</sup>
Aging (after 30 days of operation)	$\pm$ 1.0 ppm/year	
Frequency temperature stability	$\pm$ 0.5 ppm (over 0 $^{\circ}$ C to 50 $^{\circ}$ C)	
Impedance	50 $\Omega$ , nominal	
REF IN	Frequency	10 MHz, nominal
	Lock frequency range	10 MHz $\pm$ 3 ppm
	Level range	0 $\pm$ 4 dBm

1. All specifications and characteristics apply to the under range frequencies 2.75 to 3.0 GHz except as noted.  
 2. At room temperature (25 $^{\circ}$  C  $\pm$  5 $^{\circ}$  C).

## Technical Specifications and Characteristics (continued)

Environmental and physical specifications				
Temperature	Operating	0 °C to 55 °C		
	Non-Operating	-40 °C to +55 °C		
Connectors	LO OUT	SMA (f)		
	10 MHz REF IN	SMB (f)		
	10 MHz REF OUT	SMB (f)		
	100 MHz REF 1 OUT	SMB (f)		
	100 MHz REF 2 OUT	SMB (f)		
EMC	Complies with European EMC Directive 2004/108/EC <ul style="list-style-type: none"> <li>- IEC/EN 61326-2-1</li> <li>- CISPR Pub 11 Group 1, class A</li> <li>- AS/NZS CISPR 11</li> <li>- ICES/NMB-001</li> </ul> This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme a la norme NMB-001 du Canada.			
Warm-up time	15 minutes, max			
Power dissipation:				
+3.3 V	+5 V	+12 V	-12 V	Total power
0.5 A	0.5 A	0.75 A	0.1 A	15 W max
Dimensions	<ul style="list-style-type: none"> <li>- 3U/2-slot PXI/CompactPCI standard</li> <li>- Chassis slot compatibility: cPCI(J1), PXI-1, PXIe Hybrid</li> <li>- Front panel complies with IEEE1101.10 certification and compliance</li> </ul>			
Weight	2 lb/ 1 kg			
System requirements				
Operating Systems	Windows XP, Service Pack 3 or later (32-bit)	Windows Vista, SP1 and SP2 (32-bit and 64-bit), Business, Ultimate, Enterprise, Home Basic, and Home Premium	Windows 7 (32-bit and 64-bit) Starter, Home Basic, Home Premium, Professional, Ultimate, Enterprise	
Processor speed	600 MHz or higher required 800 MHz recommended	1 GHz 32-bit (x86), 1 GHz 64-bit (x64), no support for Itanium 64	1 GHz 32-bit (x86), 1 GHz 64-bit (x64), no support for Itanium 64	
Available Memory	256 MB minimum (1 GB or greater recommended)	1 GB minimum	1 GB minimum	
Available Disk Space <sup>1</sup>	1.5 GB available hard disk space, includes: <ul style="list-style-type: none"> <li>- 1 GB available for Microsoft .NET Framework 3.5 SP1 <sup>2</sup></li> <li>- 100 MB for Keysight IO Libraries Suite</li> </ul>	1.5 GB available hard disk space, includes: <ul style="list-style-type: none"> <li>- 1 GB available for Microsoft .NET Framework 3.5 SP1 <sup>2</sup></li> <li>- 100 MB for Keysight IO Libraries Suite</li> </ul>	1.5 GB available hard disk space, includes: <ul style="list-style-type: none"> <li>- 1 GB available for Microsoft .NET Framework 3.5 SP1 <sup>2</sup></li> <li>- 100 MB for Keysight IO Libraries Suite</li> </ul>	
Video	Super VGA (800x600) 256 colors or more	Support for DirectX 9 graphics with 128 MB graphics memory recommended (Super VGA graphics is supported)	Support for DirectX 9 graphics with 128 MB graphics memory recommended (Super VGA graphics is supported)	
Browser	Microsoft Internet Explorer 6.0 or greater	Microsoft Internet Explorer 7 or greater	Microsoft Internet Explorer 7 or greater	

1. Because of the installation procedure, less memory may be required for operation than is required for installation.

2. NET Framework Runtime Components are installed by default with Windows Vista and Windows 7. Therefore, you may not need this amount of available disk space.

## Ordering and Configuration

### Hardware <sup>1</sup>

Model	Description
<input checked="" type="checkbox"/> M9302A	PXI local oscillator: 3 GHz to 10 GHz
<input checked="" type="checkbox"/>	Recommended configuration

- For the M9302A to work properly, at least one PXI chassis and one PXI controller type must be available.

### Accessories

Software, example programs, and product information on CD (included)

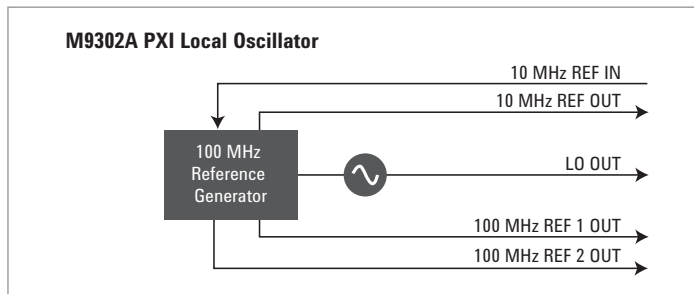


Figure 2. Simplified block diagram of the M9302A PXI Local Oscillator.

### Related products

Model	Description
M9202A	PXIe IF digitizer: 12-bit, 2 GS/s
M9360A	PXI attenuator/preselector: 100 kHz to 26.5 GHz
M9361A	PXI downconverter: 2.75 MHz to 26.5 GHz
M9351A	PXI downconverter: 50 MHz to 2.9 GHz
M9392A	PXI vector signal analyzer: 50 MHz to 26.5 GHz
M9036A	PXIe embedded controller
M9018A	PXIe 18 slot chassis

### Software

Model	Description
Supported operating systems	Microsoft Windows XP (32-bit), Microsoft Windows Vista (32/64-bit), Microsoft Windows 7 (32/64-bit)
Standard compliant drivers	IVI-COM, IVI-C, LabVIEW, MATLAB
Supported application development environments	Visual Studio (VB.NET, C#, C/C++), VEE, LabVIEW, LabWindows/CVI, MATLAB (ADE)
Keysight IO Libraries	Includes: VISA libraries, Keysight Connection Expert, IO monitor

## Warranty and calibration

### Advantage services: Calibration and warranty

Keysight Advantage Services is committed to your success throughout your equipment's lifetime.

#### Calibration

R1282A	Annual calibration
--------	--------------------

M9302A-UK6	Commercial calibration certificate with test data <sup>1</sup>
------------	--

#### Warranty

Included	3-year warranty (return to Keysight), standard
----------	--

R-51B-001-5Z	5-year return to Keysight warranty assurance plan
--------------	---

#### Express warranty <sup>1</sup>

R-51B-001-3X	Express Warranty - 3 years
--------------	----------------------------

R-51B-001-5X	Express Warranty - 5 years
--------------	----------------------------

1. Options not available in all countries.

## Definitions for specifications

**Specifications** describe the warranted performance of calibrated instruments that have been stored for a minimum of 2 hours within the operating temperature range of 0 °C to 55 °C, unless otherwise stated, and after a 45 minute warm-up period. Data represented in this document are specifications unless otherwise noted.

**Characteristics** describe product performance that is useful in the application of the product, but that is not covered by the product warranty. Characteristics are often referred to as Typical or Nominal values.

- **Typical** describes characteristic performance, which 80% of instruments will meet when operated over a 20 °C to 30 °C temperature range. Typical performance is not warranted.
- **Nominal** describes representative performance that is useful in the application of the product when operated over a 20 °C to 30 °C temperature range. Nominal performance is not warranted.

Note: All graphs contain measured data from several units at room temperature unless otherwise noted.

**myKeysight**

**myKeysight**

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[www.pxisa.org](http://www.pxisa.org)



PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

**Three-Year Warranty**

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



**Keysight Assurance Plans**

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System



**Keysight Channel Partners**

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

PICMG and the PICMG logo, CompactPCI and the CompactPCI logo, AdvancedTCA and the AdvancedTCA logo are US registered trademarks of the PCI Industrial Computers Manufacturers Group. "PCIe" and "PCI EXPRESS" are registered trademarks and/or service marks of PCI-SIG.

[www.keysight.com/find/m9302a](http://www.keysight.com/find/m9302a)

[www.keysight.com/find/modular](http://www.keysight.com/find/modular)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-09-23-14)

