

WJ5900A WaveJudge 5G Real-Time Wireless Analyzer

Analyze and Troubleshoot Wireless Networks and Devices with Protocol Message Decodes Correlated with RF Charts

Troubleshoot Efficiently

The Keysight WJ590A WaveJudge 5G Real-Time Wireless Analyzer is a unique solution for passive signal capture and analysis. Offering a channel bandwidth up to 800 MHz per RF port with 2 to 8 RF ports per chassis, it is the ideal tool for debugging and troubleshooting during the development phase of any wireless technology such as 5G, WLAN, NTN, LTE, or V2X.



Definitions and Conditions

The instrument will meet its specifications when:

- The instrument has been stored at an ambient temperature within the allowed operating range for at least two hours before being switched on, if it had previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range.
- The instrument has been switched on for at least 30 minutes.

Specification

Specifications describe the performance parameters covered by the product warranty and are valid from 20 to 35 °C unless otherwise noted.

Typical

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 95 percent of the units exhibit with a 95 percent confidence level. This data, shown in *Italics*, does not include measurement uncertainty, and is valid only at room temperature, 23 °C.

Nominal

Nominal values indicate expected performance or describe product performance that is useful in the application of the product but are not covered by the product warranty.

General Characteristics

This document describes the performance parameters and the main specifications of the WJ5900A WaveJudge 5G real-time wireless analyzer. First, the general features are described, and then specifications are provided for the instrument and each module.

Key Features

- Unique solution for passive signal capture and analysis
- 5G NR real-time decoding
- 3GPP 5G NR Releases 15 to 18, including 5G NR NTN, RedCap, and V2X
- 3GPP LTE Releases 9 to 16
- IEEE Wi-Fi 802.11a/b/g/n/ac/ax/be/bn
- SSD storage for long IQ captures to troubleshoot intermittent issues
- Superior EVM and decoding performance
- Scalable ports per chassis: 2, 4, 6 or 8
- Channel bandwidth up to 800 MHz with options for 100 MHz or 400 MHz
- Single RF module covering FR1 and FR2 bands, with mmWave module for frequency conversion up to 42.5 GHz
- Unlimited time analysis for 5G NR
- Streaming analytics and charting
- Advanced triggers, stack breakpoints
- Expanded filtering and visualizations

Modulation Formats

- QFDMA/SC-FDMA with BPSK
- QPSK
- 16QAM
- 64QAM
- 256QAM
- 1024QAM
- 4096QAM
- Zadoff-Chu

Traces

- Constellation
- 2D physical
- Time domain power
- EVM vs. subcarrier
- EVM vs. symbol time
- MIMO rank per subcarrier
- MIMO rank per symbol
- Spectral flatness (frequency domain)
- Amplitude flatness (time domain)
- CCDF, PAPR
- Spectral power
- Amplitude, phase, frequency during synchronization signal
- Impulse response

Example Statistics

- EVM
- Peak EVM
- Reference signal EVM
- Carrier and sampling clock frequency error
- IQ offset
- CFI error rate
- Payload bits
- RSSI, RSRP, RSRQ
- MCS
- N resources
- Modulation type

Instrument Specifications

The following tables describe the characteristics and specifications for the instrument including the chassis.

Description	Specification
Input voltage and frequency	100 to 120 or 220 to 240 V AC, 50 to 60 Hz, nominal
Input power consumption (fully loaded configuration)	1100 W
Chassis dimensions (H x W x L)	102 x 474 x 588 mm (4.0 x 18.7 x 23.1 inches)
Weight	13.9 kg (30.6 lbs)
Operating temperature and humidity	20 to 35 °C, 30 g/m3 absolute humidity, 5 to 85 % non-condensing relative humidity
Storage temperature and humidity	-40 to 70 °C, 50 g/m3 absolute humidity, 5 to 85 % non-condensing relative humidity
Altitude	≤ 2000 m
EMC	EMC complies with essential requirements of the European EMC Directive and the UK Electromagnetic Compatibility Regulations 2016 as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):
	IEC/EN 61326-1
	CISPR Pub 11, Group 1, class A
	Caution: This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.
	AS/NZS CISPR 11
Safety	CAN ICES/NMB-001(A) This ISM device complies with Canadian ICES-001. Cet appareil ISM est conforme a la norme NMB-001 du Canada.
	Acoustic statement (European Machinery Directive)
	Acoustic noise emission, LpA < 70 dB, operator position, normal operation mode, per ISO 7779
Calibration	No regular calibration is required
Standard warranty	One year (extensions are available)

Rear Panel Connections	Description	Specification
LAN (Local Area Network) ports		1 GB Ethernet
GPS ANT input	Input from GPS antenna for precision time stamps	Lock requires at least 4 GPS signals for 20 to 30 seconds
	Impedance	50 ohms
	Coupling	AC
	Maximum V_{pp}	1400 mV
	Minimum V_{pp}	800 mV
	Maximum antenna bias voltage/current	6 V / 100 mA
	Active antenna minimum gain	15 dB
	Active antenna maximum gain	50 dB
	Active antenna maximum noise figure	1.5 dB
PPS IN	Pulse per second (PPS) input for precision time stamps	PPS signal
PPS OUT	PPS signal out for synchronizing with external equipment	PPS signal
WAN port	Wide area network port	1 GB Ethernet
LAN 1 and 2 ports	Local area network ports	1 GB Ethernet
SYNC OUT	4 ports for synchronization with additional chassis	
SYNC IN	2 ports for synchronization with additional chassis	

WJ5900A-RA1 RXJudge RF Receiver Module Specifications

The following tables describe the characteristics and specifications of one RXJudge RF receiver module in the chassis.

General	Specification
Receive modules per chassis	1 or 2
RF input ports	2 or 4

Amplitude	Specification
Variable attenuator	65 dB
Attenuator step size	1 dB
Measurement range	≤ 5 dBm RF input power
Absolute maximum RF input	≤ 15 dBm
Absolute amplitude accuracy	$< \pm 1.5$ dB, nominal
Relative amplitude accuracy for adjacent tones 1.44 MHz apart	$< \pm 0.2$ dB, nominal

Frequency	Description	Specification
watSynthesizer output	Center frequency range	500 MHz to 8 GHz
	Center frequency resolution	0.03 Hz
	Spectral purity/single sideband phase noise	See Figure 2 for noise at 4 GHz
Reference frequency output	98.304 MHz OCXO	External reference input (optional)
		10 MHz or 100 MHz
		Temperature stability $\Delta F/F$, with reference to 25 °C
		± 20 ppb
		Aging per year
		± 200 ppb

RF Measurement Performance	Description	Specification
100 MHz channel performance	Measured EVM noise level	0.3 to 1 %, nominal (see Figure 1)
	Actual noise floor	-90 to -88 dBm, nominal
	Theoretical noise floor	-94 dBm, nominal
	Noise figure (Atten = 0)	4 to 6 dB, nominal

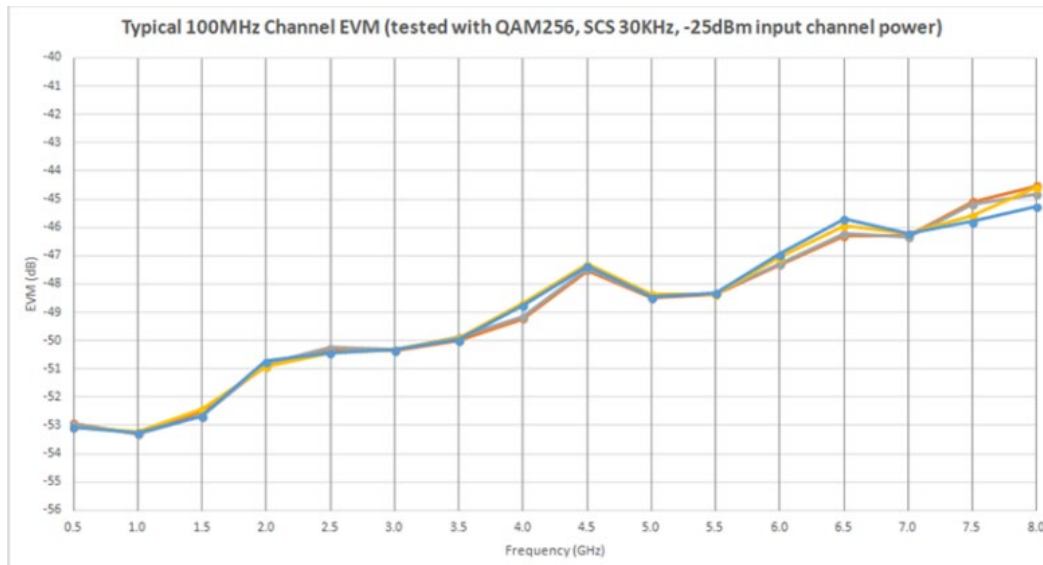


Figure 1. Measured EVM noise level

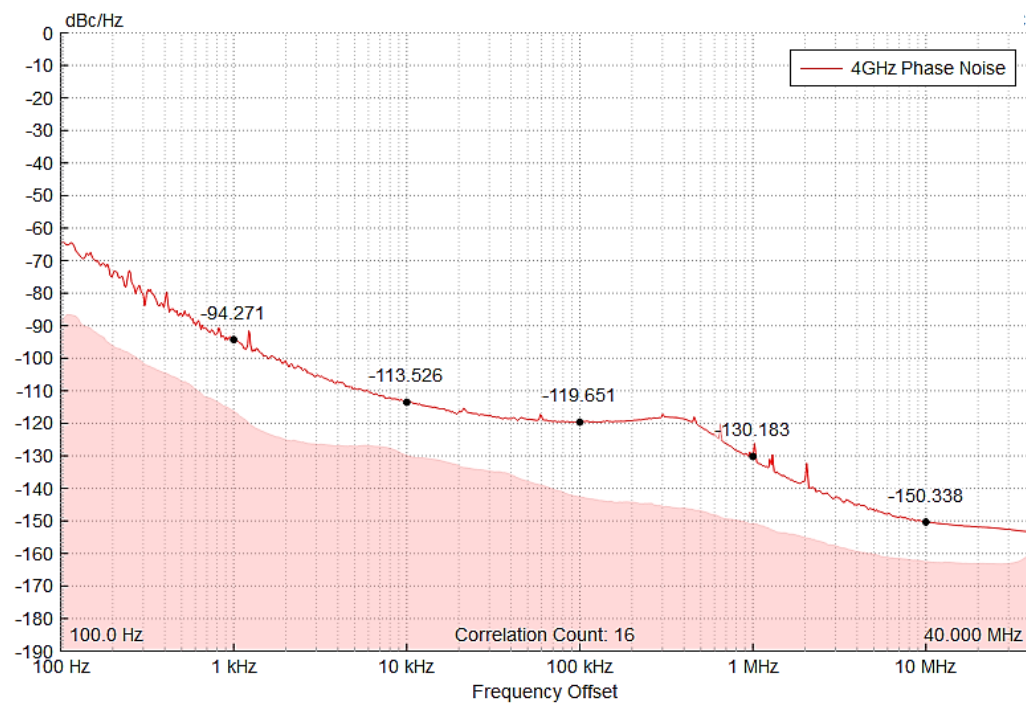


Figure 2. Measured phase noise at 4 GHz

Sampling System	Specification
A/D bits	16 bits
A/D clock	983.04 MHz
Sample frequency accuracy	< ± 2 Hz

Input Center Carrier / LO Frequency	Input Channel Bandwidth
500 to 600 MHz	100 MHz
600 to 1310 MHz	200 MHz
1310 to 2000 MHz	400 MHz
2000 to 8000 MHz	800 MHz

Non-Real-Time Capture Analysis Depth	Configuration	Specification
4-port configuration	4 port x 800 MHz/port	0.546 second/port
	4 port x 400 MHz/port	1.092 second/port
	4 port x 200 MHz/port	2.184 second/port
	4 port x 100 MHz/port	4.368 second/port
2-port configuration	2 port x 800 MHz/port	1.092 second/port
	2 port x 400 MHz/port	2.184 second/port
	2 port x 200 MHz/port	4.368 second/port
	2 port x 100 MHz/port	8.736 second/port

Front Panel Connectors	Description	Specification
RF In 1 to 4	Connector	2.92 mm receptacle
	Impedance	50 ohms
	Coupling	AC
	Input	≤ 5 dBm
LO Out 1 and 2	Local oscillator output to external mmWaveJudge (extension to FR2)	
mmWave 1 and 2	Power output to external mmWaveJudge (extension to FR2)	
Ref Clk input	Connector	SMA receptacle
	Impedance	290 ohms
	Coupling	DC
	Maximum V_{pp}	1800 mV
	Minimum V_{pp}	800 mV
Trig In	Connector	SMA receptacle
	Impedance	High impedance
	Coupling	DC
	Maximum V_{pp}	1800 mV
	Minimum V_{pp}	0 mV
	Trigger level	800 mV
Aux Out	Connector	SMA receptacle
	High level out	$2.6 V_{min}$
	Low level out	$0.4 V_{max}$
	Drive strength	12 mA
LED indicators	Lock (top)	Indicates RF LO locked
	Lock (bottom)	Indicates sampling system locked
	mmWave1 and 2	Indicates mmWave RRH detected
	Err	Indicates hardware failure
	Ext Ref	Indicates lock to external reference
	Prog Mezz	Mezzanine card detected and running
RF-1 to 4 outputs	Digital baseband outputs	50 Gbps throughput

WJ5900A-DA1 IntelliJudge Module Specifications

The following tables describe the characteristics and specifications of one IntelliJudge module in the chassis.

General Characteristics	Specification
DSP	8 core DSP at 1.25 GHz
SDRAM (DSP)	4 GB
FPGA	Xilinx XCKU115
SDRAM (FPGA)	8 GB
SSD	3.6 TB

Front Panel Connectors	Description	Specification
SRIO-1 and 2	For communication between chassis	6 GHz x 4 lane = 20 Gbps
RF - 1 to 4	Digital baseband input	50 Gbps

Simplify Troubleshooting of RF and Signaling Issues

Keyight's WJ5900A WaveJudge 5G Real-Time Wireless Analyzer makes resolving RF and signaling issues easy.

- Unique solution for passive signal capture and analysis
- Real-time decoding of 5G NR signals
- FR1 and FR2 with channel bandwidth up to 800 MHz

For more information, visit the following links.

[WJ5900A WaveJudge 5G Real-Time Wireless Analyzer](#)

[SJ001A WaveJudge Wireless Analyzer Toolset](#)

[WJ001000A WaveJudge Wireless Analyzer software](#)

[WJ1000A mmWaveJudge Remote Receiver](#) (for extension to FR2)



Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at www.keysight.com.

This information is subject to change without notice. © Keysight Technologies, 2018 – 2026, Published in USA, May 15, 2026, 3123-1418.EN