

Keysight Technologies

87405C

100 MHz to 18 GHz Preamplifier

Key Features

- Compact, portable design for ease of use in the field
- Probe-power bias connection eliminates the need for an additional power supply
- Low noise figure of 4.5 dB and high gain of 25 dB helps improve the dynamic range and sensitivity of your test equipment
- High 15 dBm P1dB increases the available power from network and spectrum analyzers



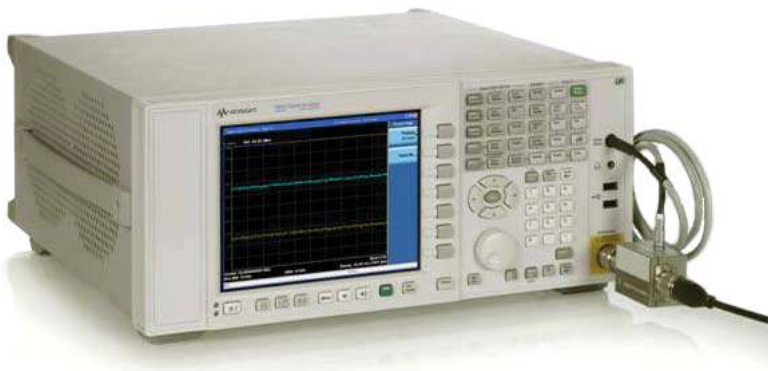


Figure 1. Preamplifier with spectrum analyzer test setup

Description

The Keysight Technologies, Inc. 87405C preamplifier improves overall system performance and helps reduce system errors with reliable gain and low noise figure.

Compact and portable, this preamplifier can be powered directly from the instrument's probe-port which eliminates the need for a separate power supply and makes it an excellent choice for use in the field. The 87405C is designed for use with a variety of Keysight instruments such as the PSA, ESA and MXA spectrum analyzers. The rugged Type-N connectors stand up to the multiple connects and disconnects needed in field applications for reliable, repeatable measurements.

Cable options are provided for stand-alone operation, allowing this instrument to be powered up by any triple output DC source. The compact and inexpensive 87422A power supply is a suitable source of DC bias in this and other amplification applications.

Specification

Specifications describe the product's warranted performance. Supplemental and typical characteristics are intended to provide typical but non-warranted performance parameters. These are denoted as "typical", "nominal" or "approximate".

87405C Product Specifications

Specification	87405C
Frequency range	0.1 - 18 GHz
Gain, S_{21}	25 dB
Flatness (+/-)	1.5 dB
Noise figure	6 dB (0.1 - 4 GHz) 4.5 dB (4 - 18 GHz)
Return loss, S_{11}	15 dB (0.1 - 4 GHz) 10 dB (4 - 18 GHz)
Return loss, S_{22}	15 dB (0.1 - 4 GHz) 10 dB (4 - 18 GHz)
P_{1dB}	15 dBm (0.1 - 4 GHz) 14 dBm (4 - 18 GHz)
Harmonics (@ +4 dBm output power)	-30 dBc (typical)
Impedance	50 Ohms (typical)
Survival input power (max)	+15 dBm
Reverse isolation	-50 dB (typical)
Power dissipation	2.1 W (typical)

Related Literature

Preamplifiers and System Noise
Figure Application Note,
 November 6, 2006, literature number
 5989-5742EN

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada (877) 894 4414
 Brazil 55 11 3351 7010
 Mexico 001 800 254 2440
 United States (800) 829 4444

Asia Pacific

Australia 1 800 629 485
 China 800 810 0189
 Hong Kong 800 938 693
 India 1 800 112 929
 Japan 0120 (421) 345
 Korea 080 769 0800
 Malaysia 1 800 888 848
 Singapore 1 800 375 8100
 Taiwan 0800 047 866
 Other AP Countries (65) 6375 8100

Europe & Middle East

Austria 0800 001122
 Belgium 0800 58580
 Finland 0800 523252
 France 0805 980333
 Germany 0800 6270999
 Ireland 1800 832700
 Israel 1 809 343051
 Italy 800 599100
 Luxembourg +32 800 58580
 Netherlands 0800 0233200
 Russia 8800 5009286
 Spain 0800 000154
 Sweden 0200 882255
 Switzerland 0800 805353
 Opt. 1 (DE)
 Opt. 2 (FR)
 Opt. 3 (IT)
 United Kingdom 0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-07-10-14)

www.keysight.com/find/preamp