

# Keysight Technologies PCE Express® Protocol Triggering and Decode for Infiniium 9000 Series Oscilloscopes

Data Sheet



This application is available in the following license variations.

- Order N5463B for a user-installed license
- Order Option 006 for a factory-installed license with new 9000 Series oscilloscopes
- Order N5435A Option 032 for a server-based license

# Easily debug and test designs that include PCI Express protocols using your Infiniium 9000 scope

PCI Express® interfaces are gaining in popularity outside of the computer industry. PCIe® buses can provide a content-rich point for debug and test. However, since PCIe protocols transfer bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol can't be done in real-time. In addition, traditional scope triggers are not sufficient for specifying protocol-level conditions. Keysight Technologies, Inc. provides an economical alternative for low-level PCIe debug.


Extend your scope capability with Keysight's PCIe protocol triggering and decode application. This application makes it easy to non-intrusively debug and test designs that include 2.5 Gb/s PCIe gen 1 using your Infiniium 9000 scope. Need to debug training and power management problems? This application can show what is happening during training. Using x4, x8, or even x16 links? Use the application to look at any lane, one lane at a time.

- Set up your scope to show PCIe gen 1 protocol decode in less than 30 seconds.
- Get access to a rich set of integrated protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Use time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.




## Easy to find

Turn decode on/off via the "Serial Decode" button on the front of the instrument or in the "Setup" menu. View decode embedded on the waveform display or in the protocol viewer listing window. (See pages 4-5).

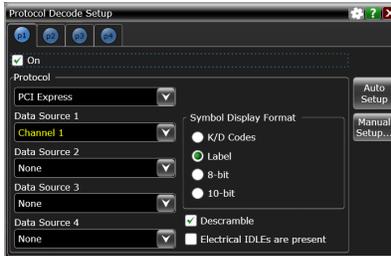

## 30 Second Setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth and threshold and trigger levels.

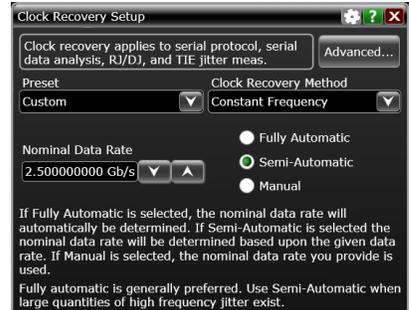

## Auto Setup

AutoSetup also includes automatic clock recovery necessary for protocol decode and triggering.

# PCI Express protocol triggering and searching


Get access to a rich set of integrated protocol level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to PCIe. When serial triggering is selected, the application enables special real-time triggering hardware inside the scope.

Hardware-based triggering ensures that the scope never misses a trigger event when armed. This hardware takes signals acquired using either scope or digital channels and reconstructs protocol frames. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.




## PCIe Trigger Setup

Choose triggers from a broad range of PCIe protocol, including token, data, handshakes, special and error types.

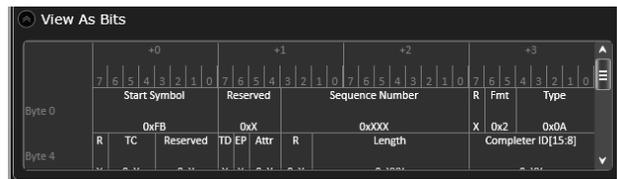


## View trigger setup

View as bits button shows the trigger setup in a data-book format for easy viewing.

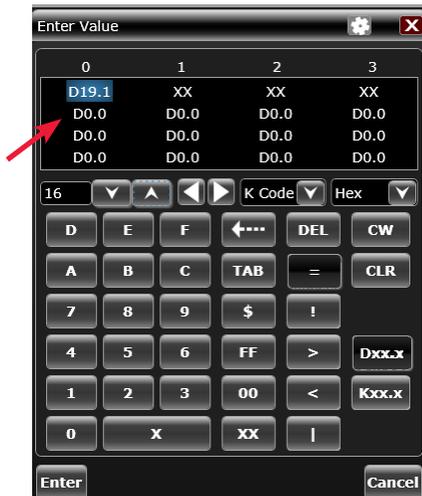

## Sequence editor

Enter sequence values using K codes or at the bit level.

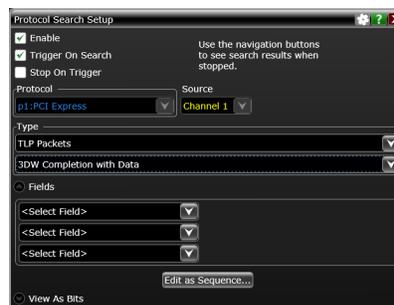

## Post-acquisition searching


Search acquired protocol listings using a menu that is identical to the trigger menu.



## Quickly find occurrences

Quickly move to next occurrence of a specified event.

# PCI Express protocol decode

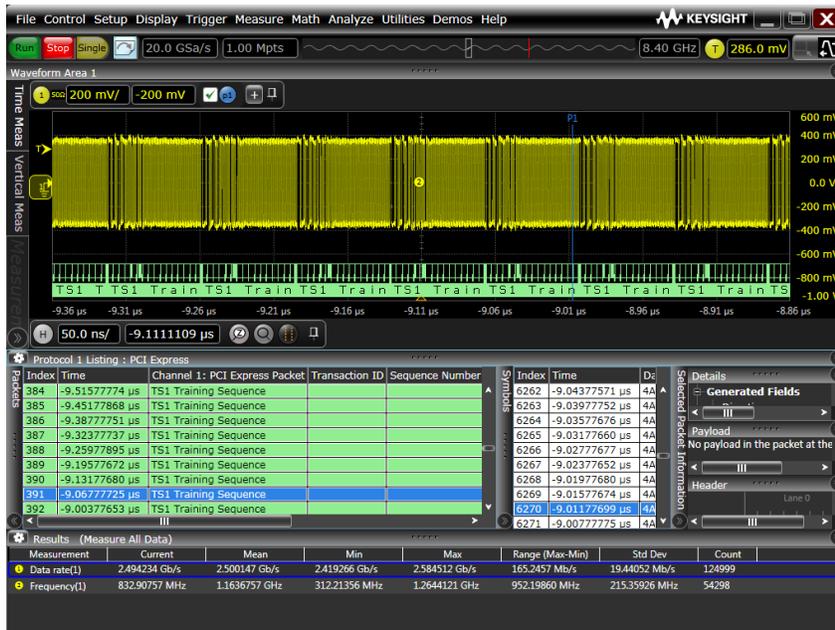

## Debug training sequences with protocol viewer

Keysight's multi-window protocol viewer includes correlation between the waveforms and the selected packet. The selected packet, highlighted blue row in the listing, is time-correlated with the blue line in the waveform display. Move the blue tracking marker in time through waveforms and the blue bar will automatically track in the packets window. Or, scroll through the packet viewer and highlight a specific packet. The time-correlation tracking marker will move to the associated point in the waveform.



## PCIe decode embedded in waveform area

Utilize the oscilloscope waveform area to display decode information. PCIe, minor ticks indicate clock transitions and major ticks show the beginning and end of each word in the serial packet. In this example an ordered set waveform and decode is shown.




## PCIe listing window

See more protocol information using the scalable listing window. The protocol viewer window shows the index number, time stamp value, and data content for each serial packet in the list. Scroll through all decoded serial packets to find events of interest or errors in the transmission. Data in the listing window can be saved to a .csv or .txt file for off-line analysis or documentation.

Index	Memory 1	Memory 2
2665	40+	0-
2666	F1-	0+
2667	36+	0+
2668	END-	0-
2669	SDP-	0+
2670	80+	0-
2671	25+	0-
2672	0-	0+
2673	0+	0+
2674	39-	0+
2675	47-	0+
2676	END-	0+
2677	0-	0-
2678	0+	0-
2679	0+	0-
2680	0-	0-
2681	0+	0-
2682	0-	0-
2683	0+	0-
2684	0-	0-
2685	SDP-	0-
2686	0+	0-


## PCIe symbol tab

# PCI Express protocol decode

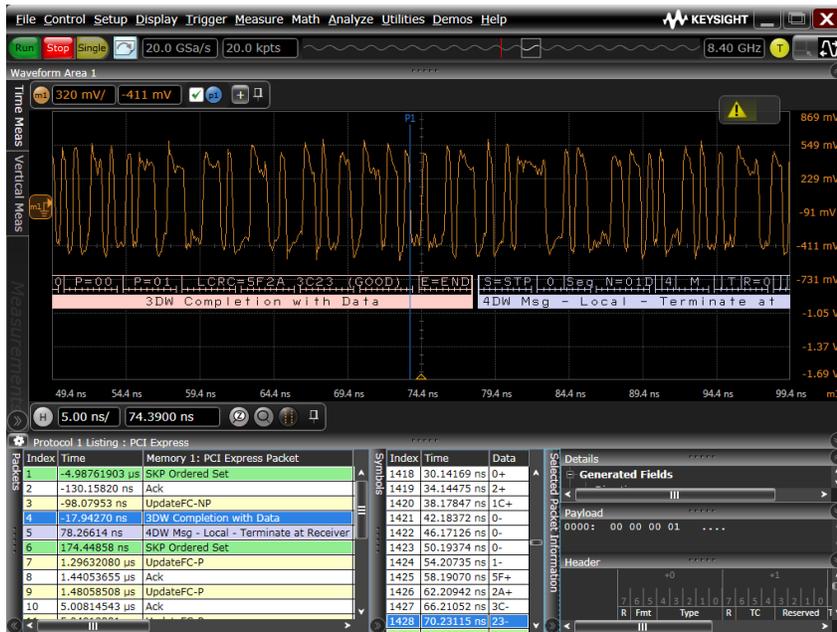

## PCIe symbols window


Easily trigger on and follow PCIe traffic. In this example the scope shows memory completion with data.

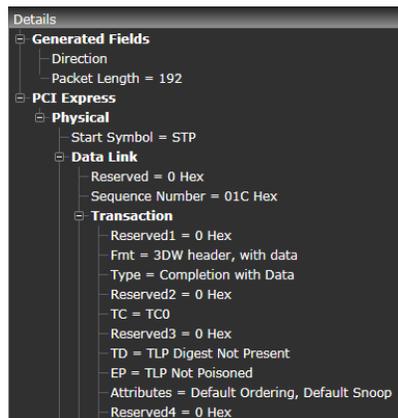

Details window shows hierarchy of physical datalink and transaction layers. Hovering shows additional detail.



Payload window shows data carried by the packet in byte-by-byte HEX and ASCII.

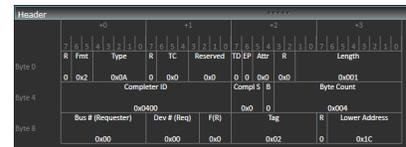

Header window shows packets in a data book format. Hovering at any field reveals additional detail. In this example memory completion packet header is shown.

## PCI Express triggering and decode specifications and characteristics

Supported 9000 Series scopes	4 GHz DSO and MSO scope channels with 5 GHz or higher bandwidth probes
PCIe sources (data and clock)	Analog channels 1,2,3 or 4 or any waveform memory
PCIe	gen 1 (2.5 Gb/s) x1 (bi-directional), can monitor x4, x8 or x16 one lane at a time
Auto Setup	Automatically configures trigger levels, measurement thresholds, clock recovery, memory depth, sample rate, trigger and holdoff for proper decode and triggering
Decode	Scrambled and unscrambled data symbols (control symbols are never scrambled) Control symbols Ordered Sets Data link and transaction layer packets including <ul style="list-style-type: none"> <li>- Header Fields</li> <li>- Data Payload</li> </ul>
Triggering	Packets  DLLP packets- Ack, nak, PM-enter L1, PM-enter L23, PM-active state request L1, PM-request ack, vendor specific, InitFC1-P, InitFC1-NP, InitFC1-Cpl, InitFC2-P, InitFC2-NP, InitFC2-Cpl, UpdateFC-P, UpdateFC-NP, UpdateFC-Cpl  TLP packet  3DW packets- Memory read request, Memory request locked, I/O read request, Configuration read type 0, type 1, completion, Completion without data, with data, Lck mem read, No data, Memory write request, I/O write request, Configuration write type 0, type 1, Completion for Lck memory read  4DW Packets Memory read or write request Memory request locked Msg Routed to root complex Routed by address Routed by ID Broadcast from root complex Local terminate at receiver Gathered and routed to root complex MsgD Routed to root complex Routed by address Routed by ID Broadcast from root complex Local terminate at receiver Gathered and routed to root complex  Symbol sequence- enter as K-codes, HEX, binary or decimal  Errors- Bad 16B CRC, bad LCRC, bad ECRC, bad packet, zero field is nonzero  Ordered sets- SKP ordered set, Fast training sequence, Electrical idle ordered set, Electrical idle exit sequence, TS1 training sequence, TS2 training sequence, modified compliance pattern, delayed modification compliance pattern, compliance pattern, delayed compliance pattern
Probing	Keysight recommends qty. 2 5-GHz or greater InfiniiMax differential probes (1132A)

## Ordering information

License type		Infiniium Z-Series	Infiniium S-Series	Infiniium 90000 Series	Infiniium 9000 Series
Fixed	Factory-installed	N5463A-1FP	N5463B-1FP	Option 017	Option 006
	User-installed	N5463A-1FP	N5463B-1FP	N5463A-1NL	N5463B-1NL
Floating	Factory-installed	N5463A-1TP	N5463B-1TP	N5463A-1TP	N5463B-1TP
	User-installed	N5435A-032	N5435A-032	N5435A-032	N5435A-032

## Related literature

Publication title	Publication type	Publication number
<i>Infiniium 9000 Series Oscilloscopes</i>	Data sheet	5990-3746EN




Sharing the application across multiple instruments? Server-based licensing allows users to borrow an application license for a specified period of time.

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

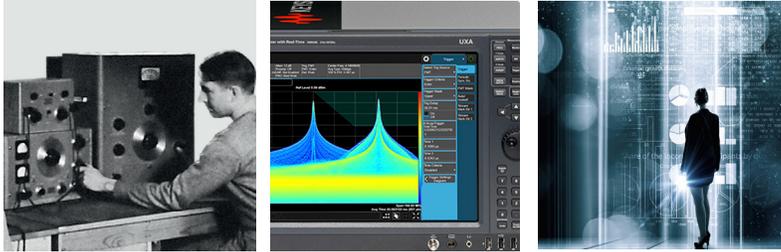

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus) (BP-9-7-17)

**DEKRA Certified**  
ISO 9001 Quality Management System

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System

### myKeysight

myKeysight  
[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)  
A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)  
Register your products to get up-to-date product information and find warranty information.

### KEYSIGHT SERVICES

Accelerate Technology Adoption.  
Lower costs.

Keysight Services  
[www.keysight.com/find/service](http://www.keysight.com/find/service)  
Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans  
[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)  
Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners  
[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)  
Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

PCI-SIG®, PCIe® and the PCI Express® are US registered trademarks and/or service marks of PCI-SIG.



This information is subject to change without notice.  
© Keysight Technologies, 2017  
Published in USA, December 2, 2017  
5990-3924EN  
[www.keysight.com](http://www.keysight.com)