


Keysight Technologies

81100 Family of Pulse/Pattern Generators

Simulation of Jittering Synchronization
Signals for Video Interfaces

Technical Overview
Version 2.0

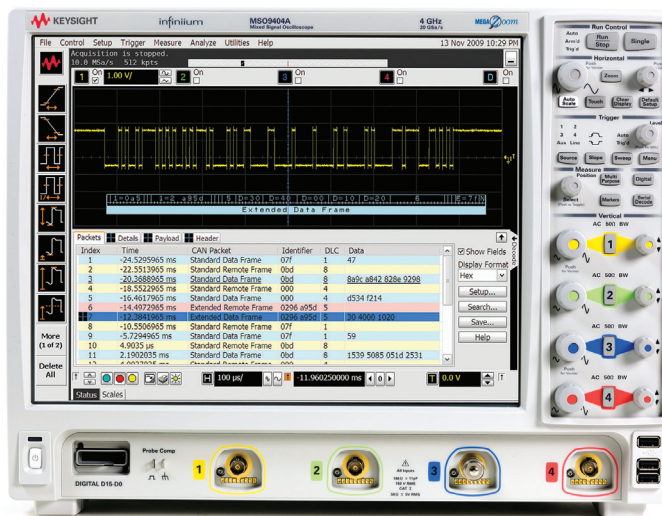



Introduction

This product note describes how R&D engineers in the communication industry use Keysight Technologies, Inc. pulse generators for the development of video interfaces for projection units.

Several data communication companies develop interfaces between Local Clock Oscillators (LCOs) and video, TV, or computers for overhead projection units. It is very important for them to stay up-to-date with the rapidly changing video interfaces in computers, and to have test equipment that can simulate these different interfaces (such as HDTV interfaces). These interfaces vary from 33 MHz to 80 MHz.

A critical indicator of the quality of their design is its sensitivity to a jittering distributed clock signal, both in frequency and amplitude.

Required equipment for Lab 2

- 1 x pulse/pattern generator (81150A or 81160A)
- 1 x Infiniium oscilloscope
- 4 x BNC cables

How to hook up the instruments

- Connect strobe out 2 (pulse/pattern generator) to channel 3 (scope).
- Connect output 1 (pulse/pattern generator) to channel 1 (scope).
- Connect output 2 (pulse/pattern generator) to channel 2 (scope).
- Connect trigger out 2 (pulse/pattern generator) to channel 4 (scope).

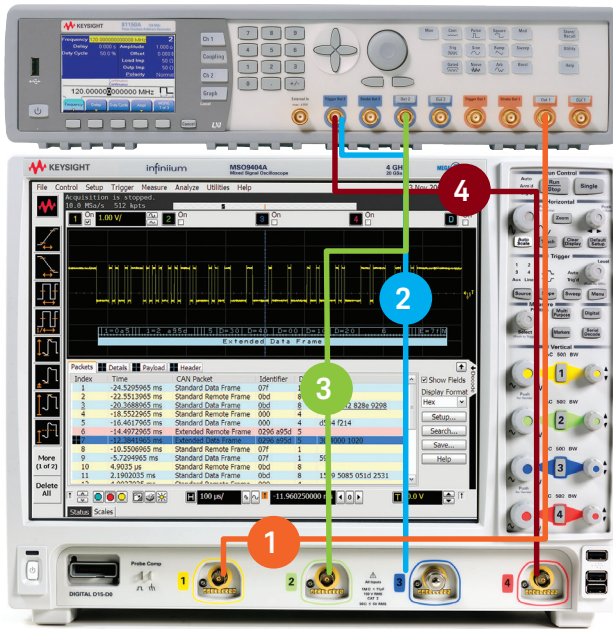


Figure 1. The setup of a Keysight pulse generator and Infiniium oscilloscope

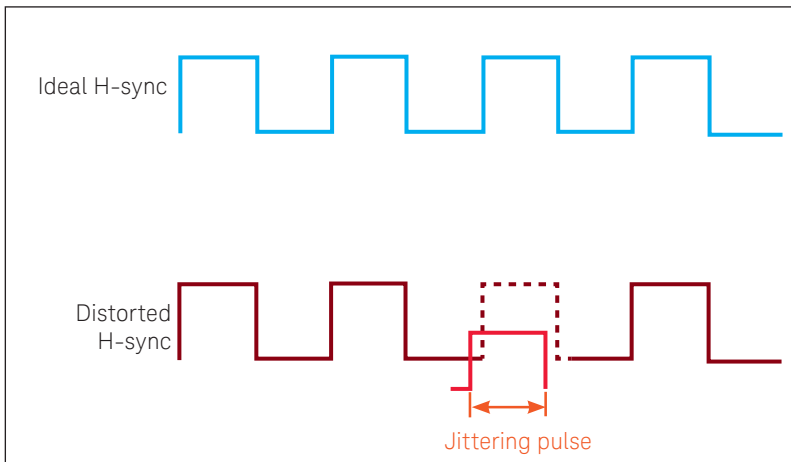


Figure 2. Jittering distributed clock signal

To simulate jittering synchronization signals with a pulse generator, we need:

- Two output channels with channel addition

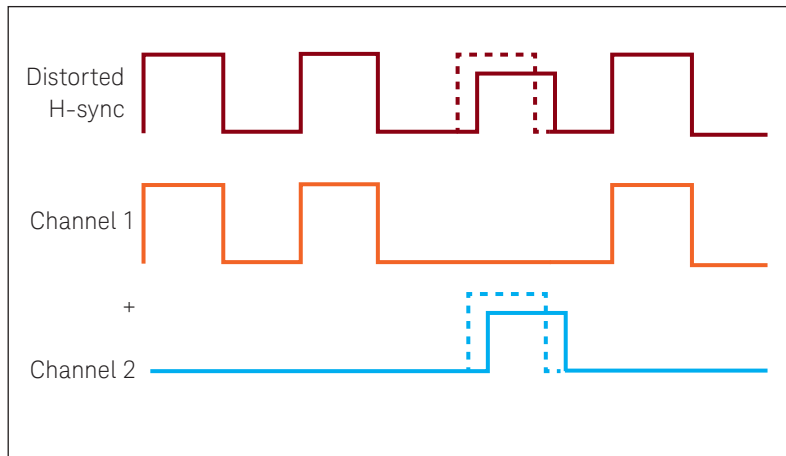


Figure 3.

- Programmable bit patterns up to 90 MHz frequency

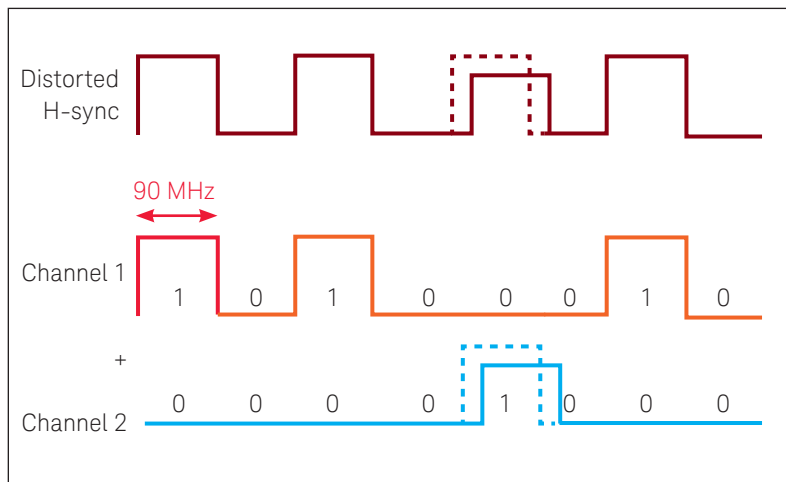


Figure 4.

- Variable delay and variable level

Follow the steps on the next pages to set up the correct parameter values on the front panel. Then review the pulses on the oscilloscope.

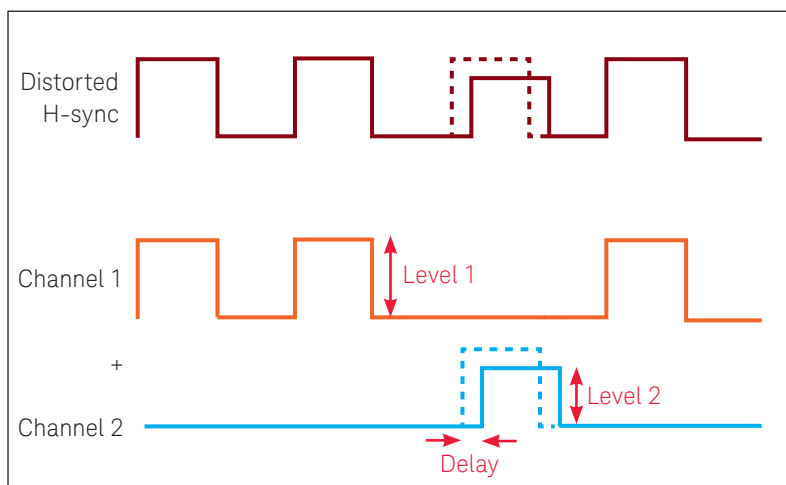


Figure 5.

STEP 1. First, reset the instrument by pushing Store/Recall and selecting 'Set to default'.

STEP 2. Enable 'Continuous trigger mode' (select 'cont') and select 'Pulse Waveform' ('Pulse') for channel 1 and channel 2.

STEP 3. Set channel 1, as shown in Figure 6.

Frequency: 90 MHz
Duty cycle: 50%
LeadE: 5 ns
High: 1 V
Low: 0 V

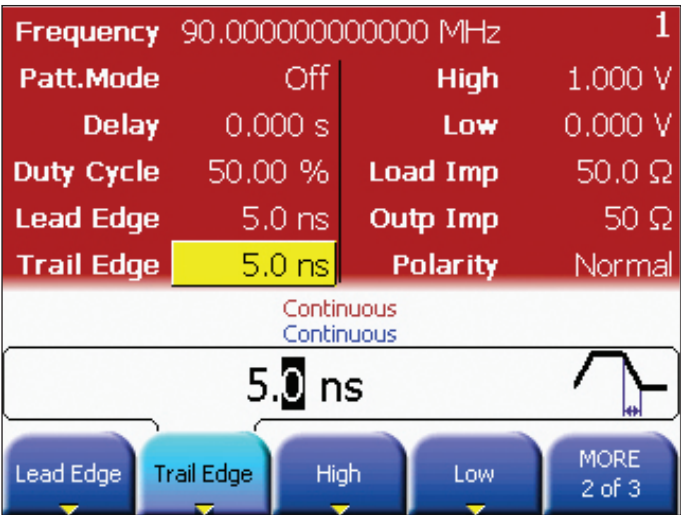


Figure 6. Step 3.

STEP 4. Set channel 2, as shown in Figure 7.

Frequency: 90 MHz
Duty cycle: 50%
LeadE: 5 ns
High: 950 mV
Low: 0 V

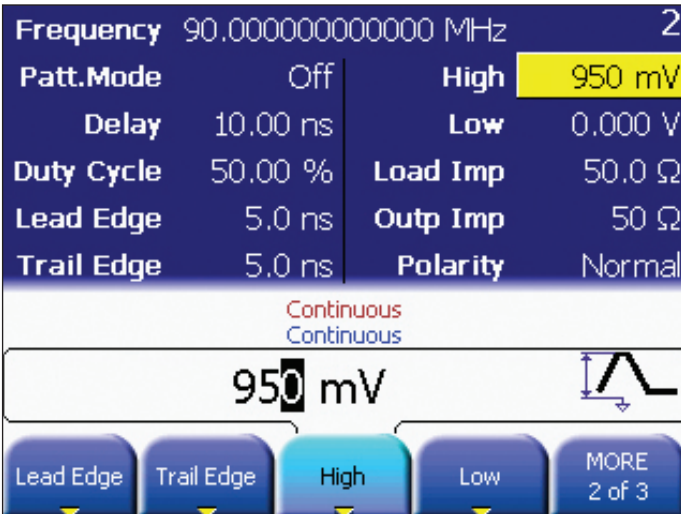


Figure 7. Step 4.

STEP 5. Choose channel 1; select 'pattern mode,' and push 'Edit Pattern' to create a new channel.

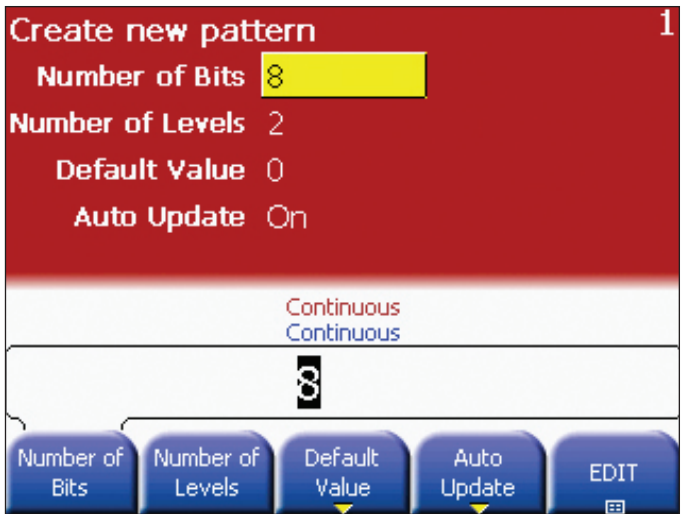


Figure 8. Step 5.

STEP 6. The number of bits are 8. Set the bits by starting with the last bit.

Note: Pattern is 10100010.

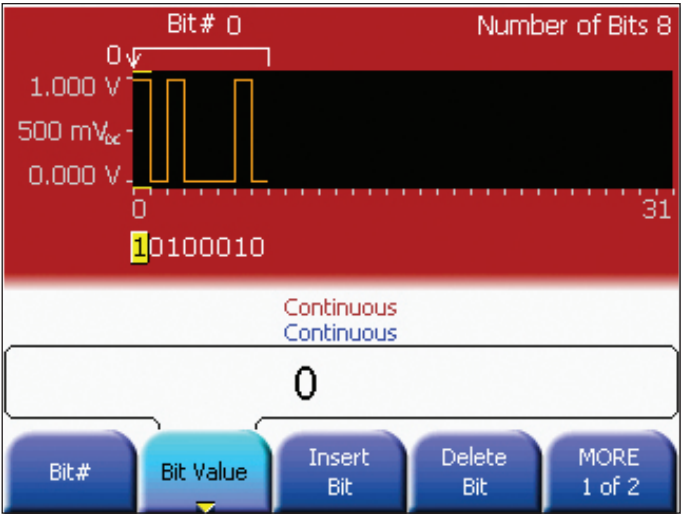


Figure 9. Step 6.

STEP 7. Perform steps 5 and 6 for channel 2.

Note: Pattern is 00001000.

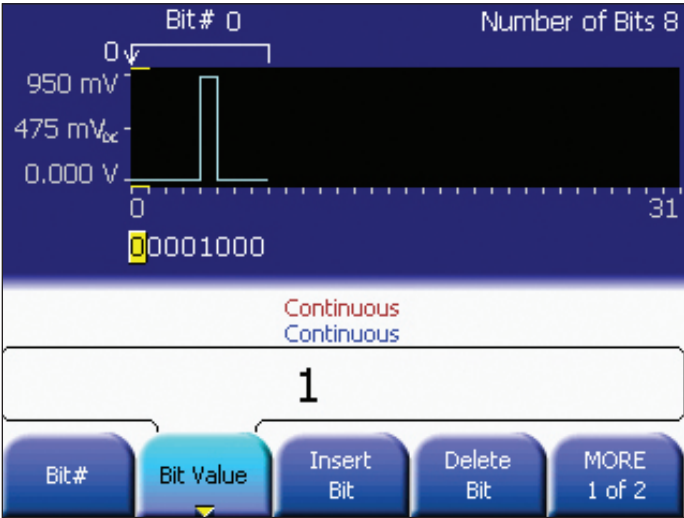


Figure 10. Step 7.

STEP 8. Review the signals on channels 1 and 2.

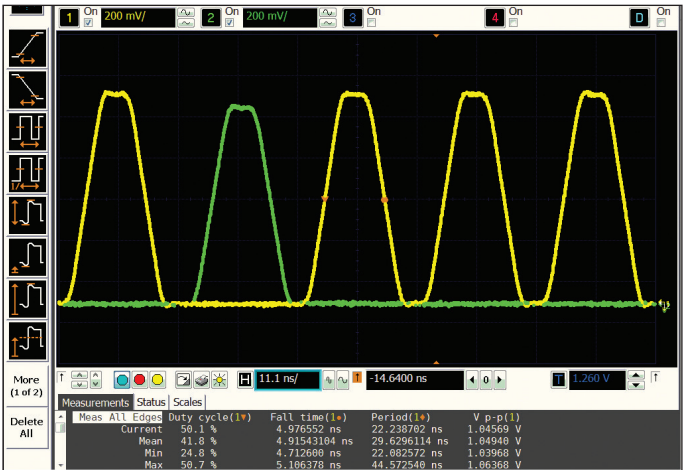


Figure 11. Step 8.

STEP 9. Press 'Coupling,' so that both pulses begin at the same time. Add channels by choosing channel 1, push 'utility' and select 'Output Setup'.

View the pulse on a Keysight MSO9404A Infiniium oscilloscope.

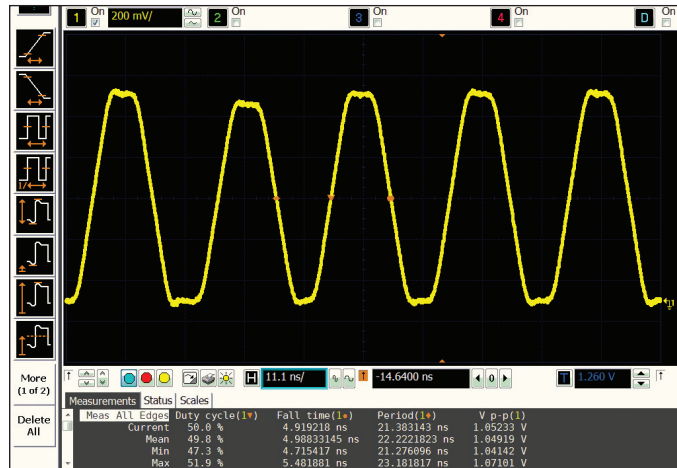


Figure 12. Step 9.

STEP 10. Vary the channel 2 delay and level to jitter the pulse.

STEP 11. View the jittered pulses on a Keysight MSO9404A Infiniium oscilloscope.



Figure 13. Steps 10 and 11.

Related Literature

81100 Family of Pulse/Pattern Generators – Brochure

81150A and 81160A Pulse Function Arbitrary

Noise Generators – Data Sheet Version 1.1

81100 Family of Pulse Pattern Generators Data Sheet –

Version 1.3 – Data Sheet

Radar Distance Test to Airborne Planes – Application Note

Dual Clock Gbit Chip Test – Application Note

Magneto-Optical Disk Drive Research – Application Note

Simulation of Jittering Synchronization Signals

for Video Interfaces – Application Note

Radar Distance Test to Airborne Planes – Technical Overview

Version 2

Dual Clock Gbit Chip Test – Technical Overview

Publication Number

5980-0489E

5989-6433E

5980-1215E

5968-5843E

5968-5844E

5968-5845E

5968-5846E


5991-2184EN

5991-2247EN

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

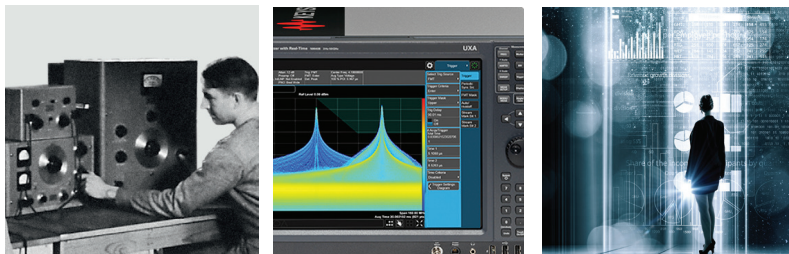

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/pulse_generator

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at:

www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System



This information is subject to change without notice.

© Keysight Technologies, 2013 - 2018

Published in USA, March 2, 2018

5991-2257EN

www.keysight.com