

Keysight Technologies UXA Signal Analyzer

Option RT1 and RT2
Real Time Spectrum Analysis

Notices

© Copyright 2015 - 2022 Keysight Technologies, Inc.

The information contained in this document is subject to change without notice.

Keysight Technologies makes no warranty of any kind with regard to this material, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Keysight Technologies shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Manual Part Number

N9040-90009

Edition

Edition 1, July 2022

Supersedes February 2017

Printed in USA/Malaysia

Published by:

Keysight Technologies, Inc.

1400 Fountaingrove Parkway

Santa Rosa, CA 95403

Option RT1 and RT2 – Real Time Spectrum Analysis Installation Kit

Products Affected:	UXA N9040B UXA N9041B
Serial Numbers:	All
Options Required:	N904xB-B2X or N9040B-B5X
To Be Performed By:	(X) Keysight Service Center (X) Personnel Qualified by Keysight (X) Customer
Estimated Installation Time:	1.0 Hours
Estimated Adjustment and Verification Time:	0 Hours

Introduction

This kit contains the instructions required to install either Option RT1 or Option RT2 on a UXA Signal Analyzer.

NOTE

1. The signal analyzer being upgraded must also have either Option B2X or Option B5X already installed. To verify that one of these options is present, press **System, Show System** and look under “Options” for “N904xB-B2X” or “N9040B-B5X”, The “x” in the “N904xB” could be either 0 or 1 for N9040B or N9041B, respectively.
2. This option is licensed for one instrument model/serial number combination. The license key will only install on the designated instrument.

Contents

Quantity	Description	Part Number
1	Installation Note	This note
1	Option Upgrade Entitlement Certificate	-----

Tools Required

- Personal computer with internet access and USB port
- USB storage device with >2GB free memory

Installation Procedure

License Installation Over USB


1. Locate the Option Upgrade Entitlement Certificate from the kit.
2. Redeem the Option Upgrade Entitlement Certificate by following the instructions on the Certificate.
3. After redeeming your Option Upgrade Entitlement Certificate you will receive an email with an attached License File.
4. Locate a USB storage device. Perform a virus scan on this device before use.
5. Save the License File to the root directory of the USB storage device.
6. Connect the USB storage device to the signal analyzer USB port. Windows will detect the new hardware and may display the configuration menu shown in **Figure 1**. This menu may be configured according to your preferences.

Figure 1 USB Storage Device Configuration Menu



7. The signal analyzer will automatically consume the License File. (This may take a few minutes) When the License File is consumed the Keysight License Manager will display a “Successful License Installation” message as shown in **Figure 2**.

Figure 2 Successful License Installation

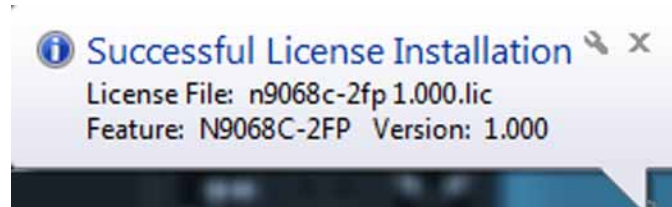

Alternate Installation Procedure

The License File can be manually installed over USB or LAN by placing the license file in the following folder on the signal analyzer

C:\Program Files\Agilent\licensing

Verify the License Installation

1. Cycle power on the UXA signal analyzer.
2. Press **System, Show System** to display a list of installed options.
3. Verify that the newly installed option number (N904xB-RT1 or N904xB-RT2) appears on the list.

Option RT1 and RT2 – Real Time Spectrum Analysis Installation Kit

Utilities, Adjustments, and Performance Verification Tests

Utilities Required

None

Adjustments Required

None

Performance Testing Required

None

For assistance, contact your nearest Keysight Technologies Sales and Service Office. To find your local Keysight office access the following URL, or if in the United States, call the following telephone number:

<http://www.keysight.com/find/assist>

1-800-829-4444 (8 am – 8 pm ET, Monday – Friday)

